




**A&L LIGHTING**  
**INDOOR & OUTDOOR LIGHTING CATALOGUE**



A&L lighting Limited was founded in 1986.

A&L has successfully developed nearly 19000 high-quality lights. Our extremely specialized R&D and quality management teams allow us to continue launching new popular lights every year and accept complex and high-standard customized lights.

All our products must be 100% qualified after a series of tests before they can be packaged and shipped. Our quality control and test standard have higher requirements in the lighting field. We equip the advanced production and testing machines imported from Germany, France, Netherlands, Japan...

We provide our customers with one-stop lighting solution from design, production, test, inspection, installation to after-sales service.


Our lights not only can meet your all kinds of lighting needs, but also bring you different enjoyments of use.


Our main lighting solutions include:

- Residential lighting solution
- Ceiling lighting solution
- Commercial lighting solution
- Office lighting solution
- Public lighting solution
- Urban lighting solution
- Architectural lighting solution
- Industrial lighting solution
- Recessed lighting solution
- Decorative lighting solution
- Outdoor underground lighting solution
- Outdoor spotlight lighting solution
- Outdoor water lighting solution
- Outdoor wall lighting solution
- Outdoor window lighting solution
- Outdoor handrail lighting solution
- Outdoor stair lighting solution
- Outdoor wall washing lighting solution
- Aesthetic lighting solution
- Acoustic lighting solution
- Smart lighting solution

Our professional and knowledgeable teams have helped customers from more than 70 countries in Europe, North America, South America, Asia, Oceania to complete their various lighting projects.

To cooperate with A&L, you only need to tell us what you need, then we will solve all your existing and potential problems so that you have no any worries.

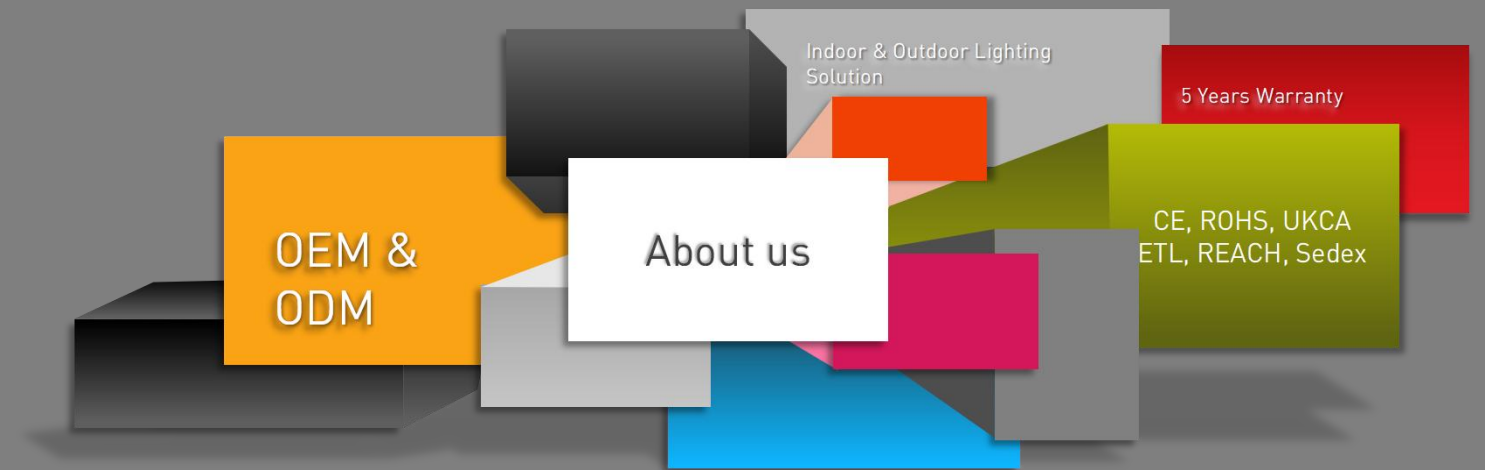

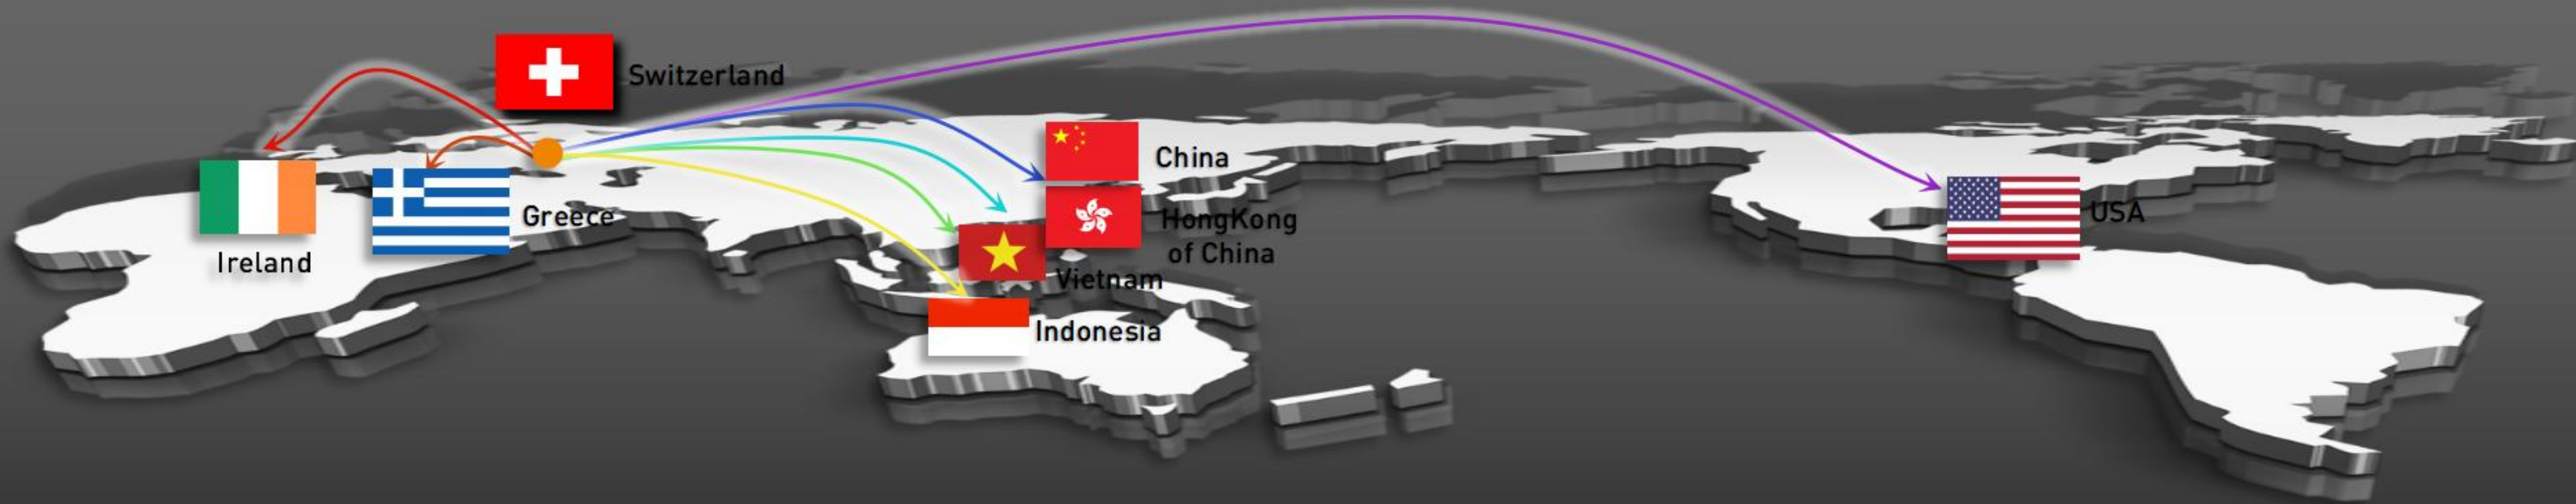

**Headquarters in Switzerland: A&L lighting AG**  
 Address: Landenbergstrasse 45 CH-6002 Luzern,  
 Switzerland.  
 Tel: +41 58 227 89 27  
 Email: info@al-leds.com

**A&L lighting factory in China**  
 Address: No.109, Yuanxia Road, Xiakeng Village, Changping Town,  
 Dongguan City, Guangdong, China 523000.  
 Tel: +86-769-8929 2953  
 Email : info@al-leds.com

**Branch in Greece: A&L lighting Co.O.E**  
 Address: Thessaloniki Industrial Area Sindos, O.T. 5B /A7 -  
 17, 54627, Thessaloniki, Greece.  
 Tel: +30 2310946765  
 Email: al-thessaloniki@al-leds.com

**Branch in HongKong of China: HongKong A.L Lighting Limited**  
 Address: SUITE 913B, 9/F, OCEAN CENTRE, 5 CANTON ROAD,  
 TSIMSHA TSUI, KLN. HONG KONG  
 Tel: +852 3188 5060  
 Email: al-hk@al-leds.com

**A&L lighting factory in Vietnam**  
 Address : 12/A7/13 Hẻm 12/8 Nguyễn Thị Minh Khai Ho Chi Minh  
 City 71007, Vietnam.  
 Tel: +84 833 377 279  
 Email: info@al-leds.com

**Branch in Ireland: A&L lighting Dublin Limited**  
 Address: 3 Harbourmaster Place, IFSC, Dublin 7, D01  
 F6F5, Ireland  
 Tel: +353 1 410 1442  
 Email: al-dublin@al-leds.com

**A&L lighting factory in Indonesia**  
 Address: Lot 53, Jl. Citra Buana Industrial Park III 29461 Batam,  
 Indonesia.  
 Tel: +62 778 7490287  
 Email: info@al-leds.com

**Branch in the United States: A&L lighting Inc**  
 Address 9410 E Hardy Rd Ste 6638, Houston, United  
 Stated  
 Tel:+1 (713) 691-0356  
 email:al-houston@al-leds.co



### Table of Contents



IP66 Landscape Light ..... 01-48




IP67 Inground Light ..... 49-116



IP65 Wall Light ..... 117-124



IP65 Step Light ..... 125-130



IP65 LED Window Light ..... 131-135



IP65 Handrail Light ..... 136




IP65 Ceiling Light ..... 137-144



IP66 Landscape Light ..... 145-148



IP67 Inground Light ..... 149-170



IP68 Swimming Pool Light ..... 171-178



IP68 Yacht Light ..... 179-182



IP65 Bollard Light ..... 183-186



IP65 Garden Light ..... 187-190



IP65 Wall Washer Light ..... 191-198



COB Strip Light ..... 199-208



Neon Flex Light ..... 209-214



Downlight ..... 215-222



High Bay Light ..... 223-226




Acoustic Light ..... 227-236



Linear Light ..... 237-250



LED Panel Light ..... 251-254

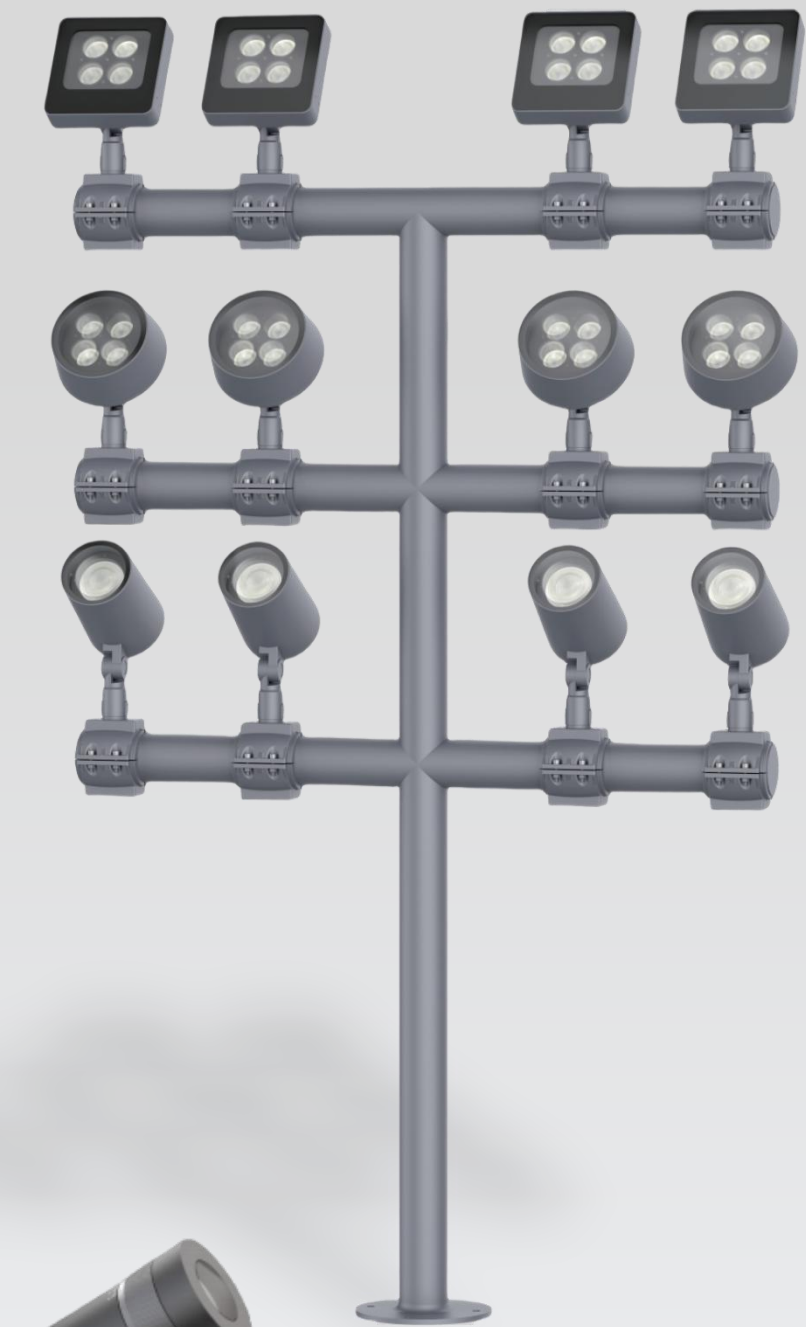


# AL-3VF Zoomable Landscape Spotlight



## Product Description

- Beam angle can be manually adjusted from 15° to 60°.
- IP66 for outdoor lighting applications.
- CREE COB LED light source, high lumen output.
- Four size with power from 6W to 40W.
- 2700K, 3000K, 4000K, 6000K, CRI 80+.
- Triac, 0-10V, PMW, DALI dimmable.
- Zoomable optical design.
- Body in die-casting aluminum housing with powder coating suitable for coastal applications.
- Grey, black, white, green and bespoke finishes.
- Various mounting options: ceiling, wall, ground, spike, tree, high mast.
- 5 years warranty.
- CE, ROHS, UKCA certified.

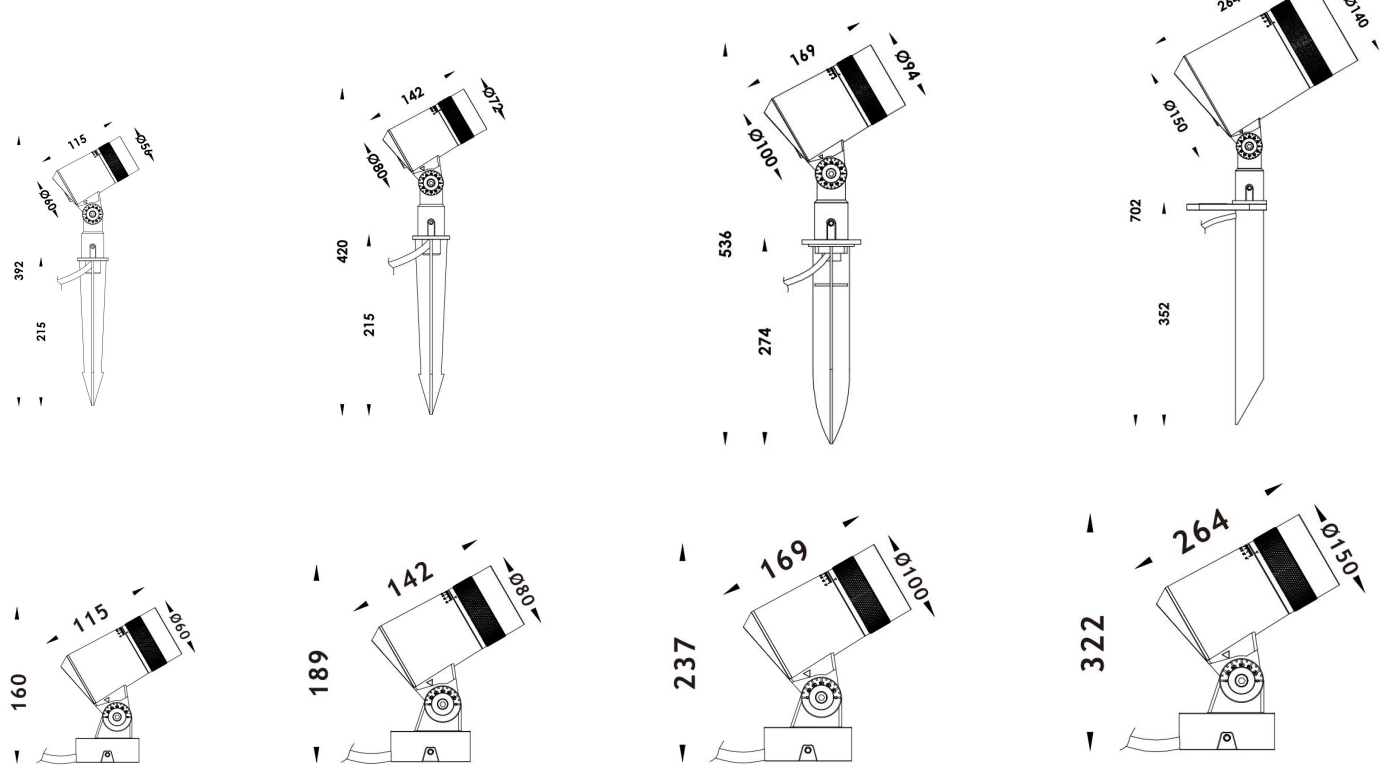


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-3VFA	1*6W	CREE COB	12/24VDC 120-240VAC	15-60° Adjustable	380lm	2700-6000K	05	66
AL-3VFB	1*12W	CREE COB	12/24VDC 120-240VAC	15-60° Adjustable	940lm	2700-6000K	05	66
AL-3VFC	1*20W	CREE COB	12/24VDC 120-240VAC	15-60° Adjustable	1420lm	2700-6000K	05	66
AL-3VFD	1*40W	CREE COB	12/24VDC 120-240VAC	15-60° Adjustable	2500lm	2700-6000K	05	66

## AL-3VB Landscape Spotlight



### Product Description

- IP66 for outdoor lighting applications.
- CREE COB and high power LED light source, high lumen output.
- Four size with power from 6W to 40W.
- RGB 3in1, RGBW 4in1, 2700K, 3000K, 4000K, 6000K, CRI 80+.
- DMX512, Triac, 0-10V, PMW, DALI dimmable.
- Body in die-casting aluminum housing with powder coating suitable for coastal applications.
- Grey, black, white, green and bespoke finishes.
- Various mounting options: ceiling, wall, ground, spike, tree, high mast.
- 5 years warranty.
- CE, ROHS, UKCA certified.

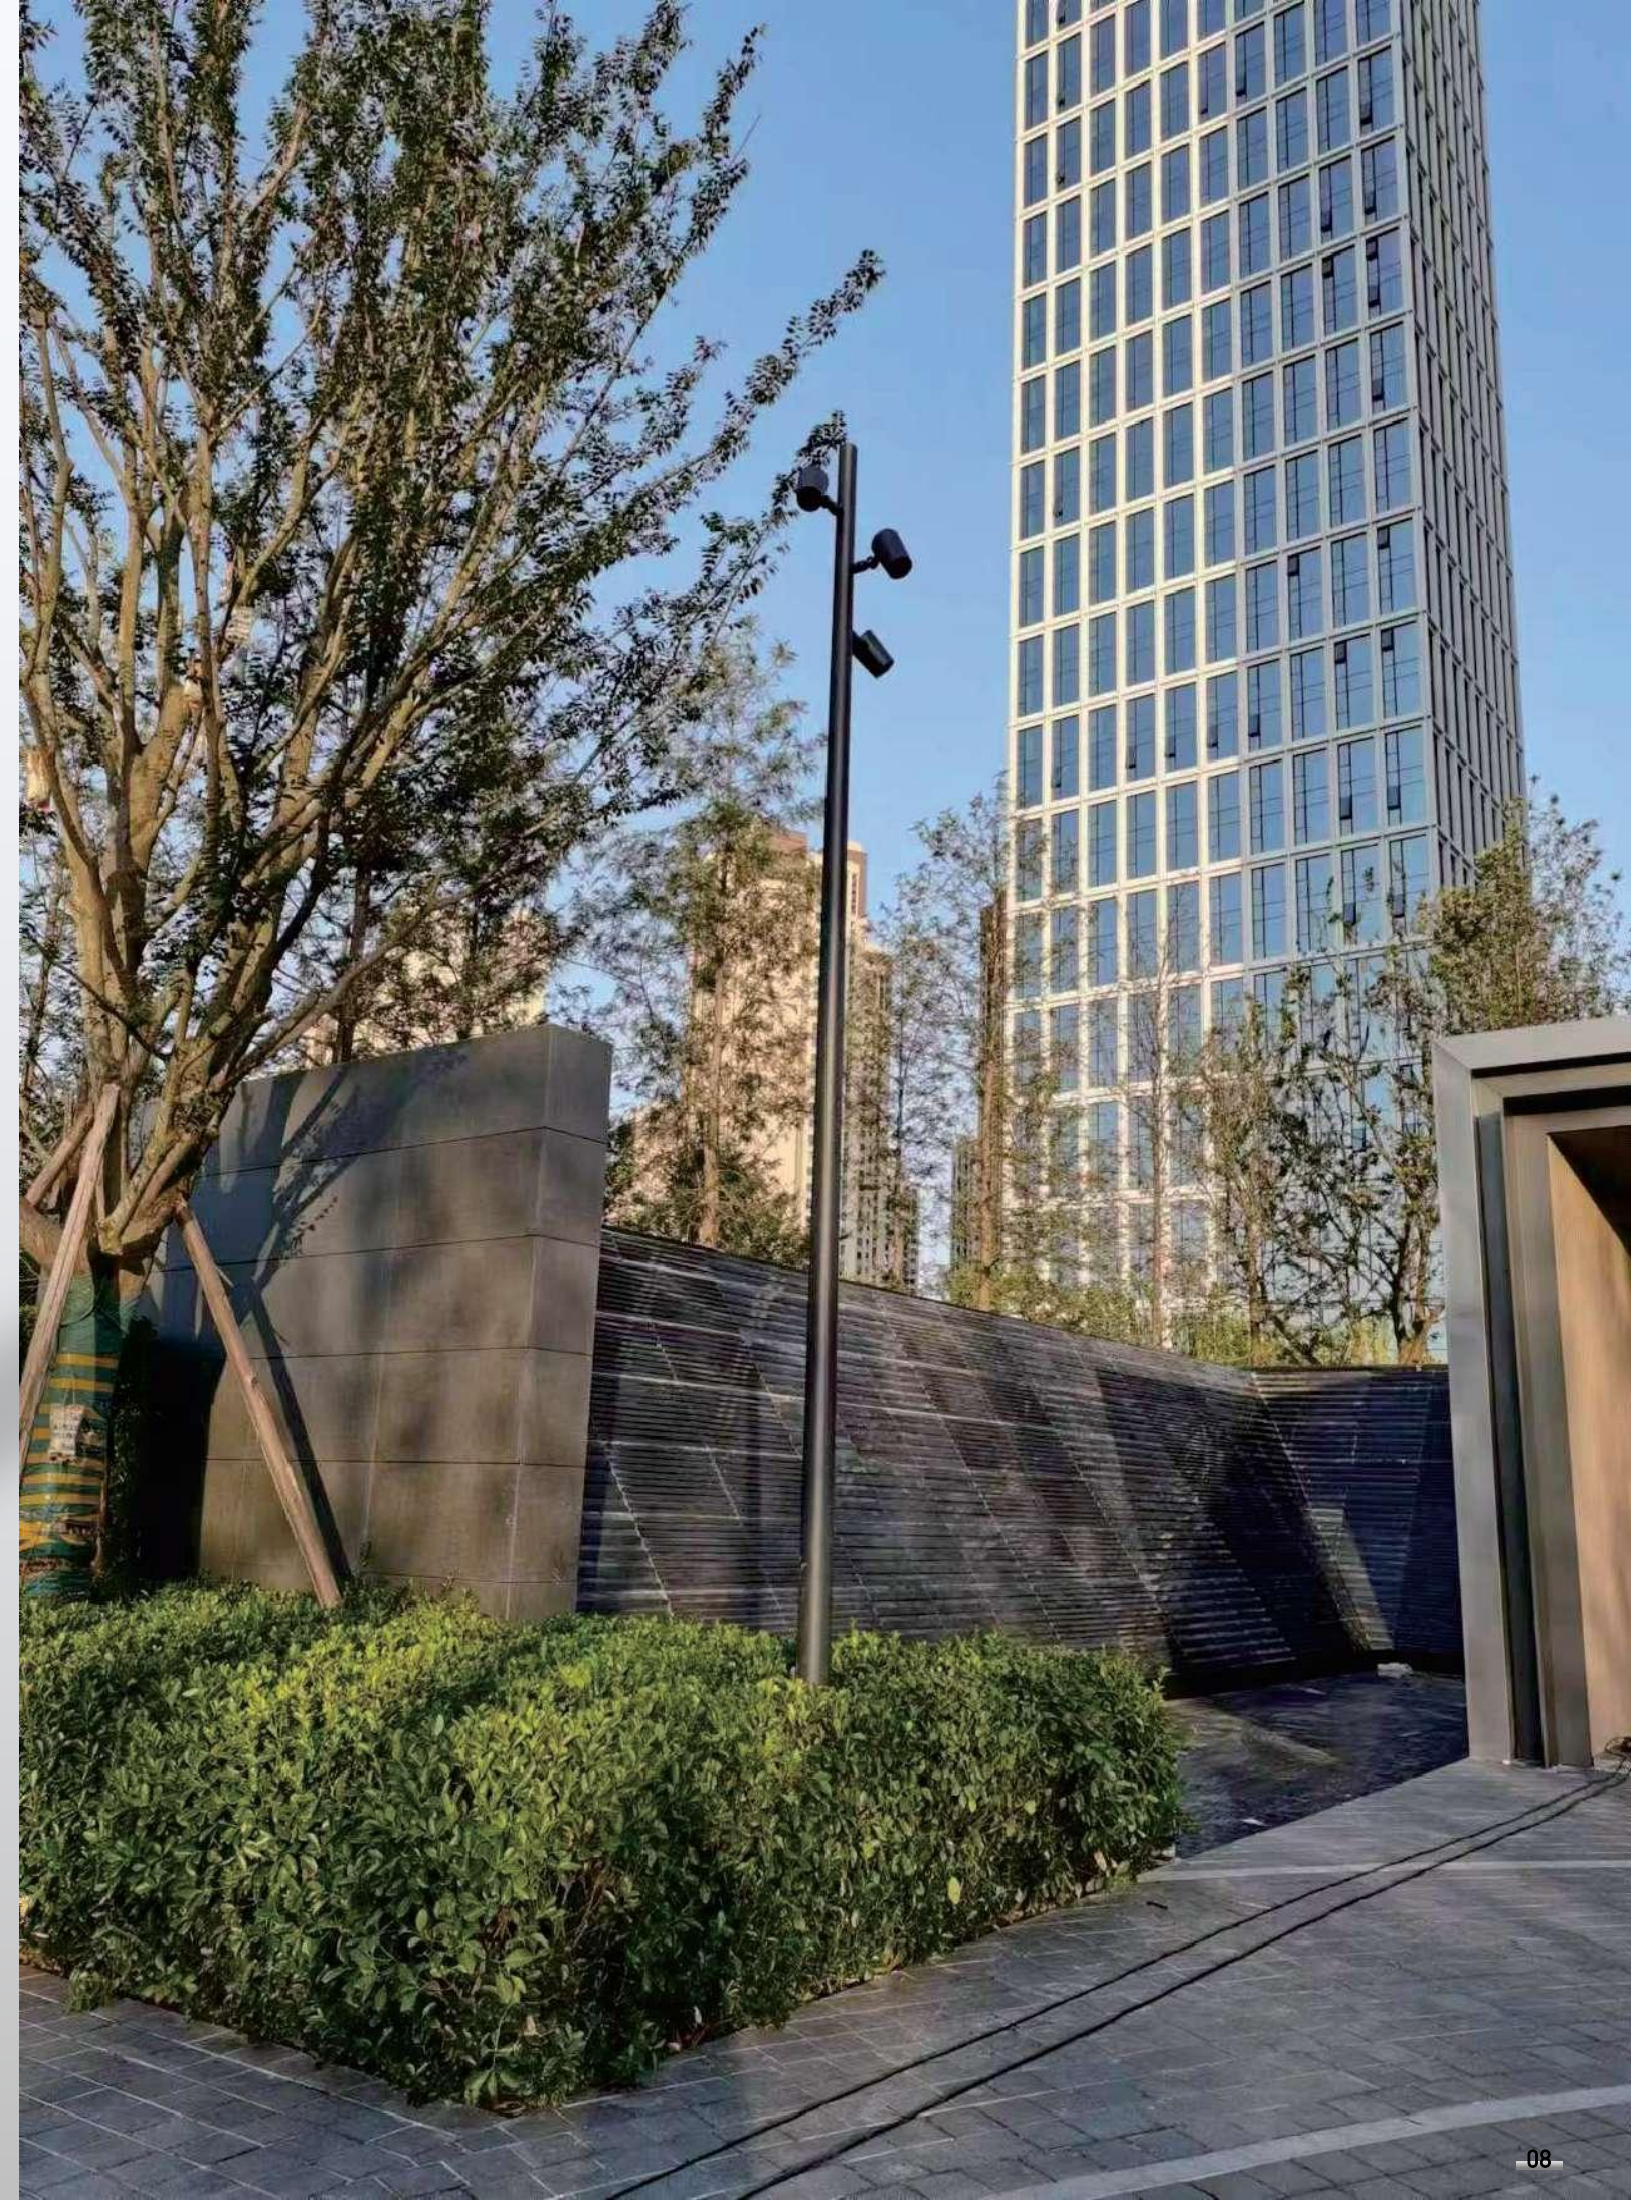





# 3VB LED Landscape Spotlight

## Accent Lights

		Narrow Spot
		Spot
		Flood


## Flood Lights


		Wide Flood
		Extra Wide Flood
		Elliptical Flood

## Lens Wall Washers

		Wallwash
--	---	----------



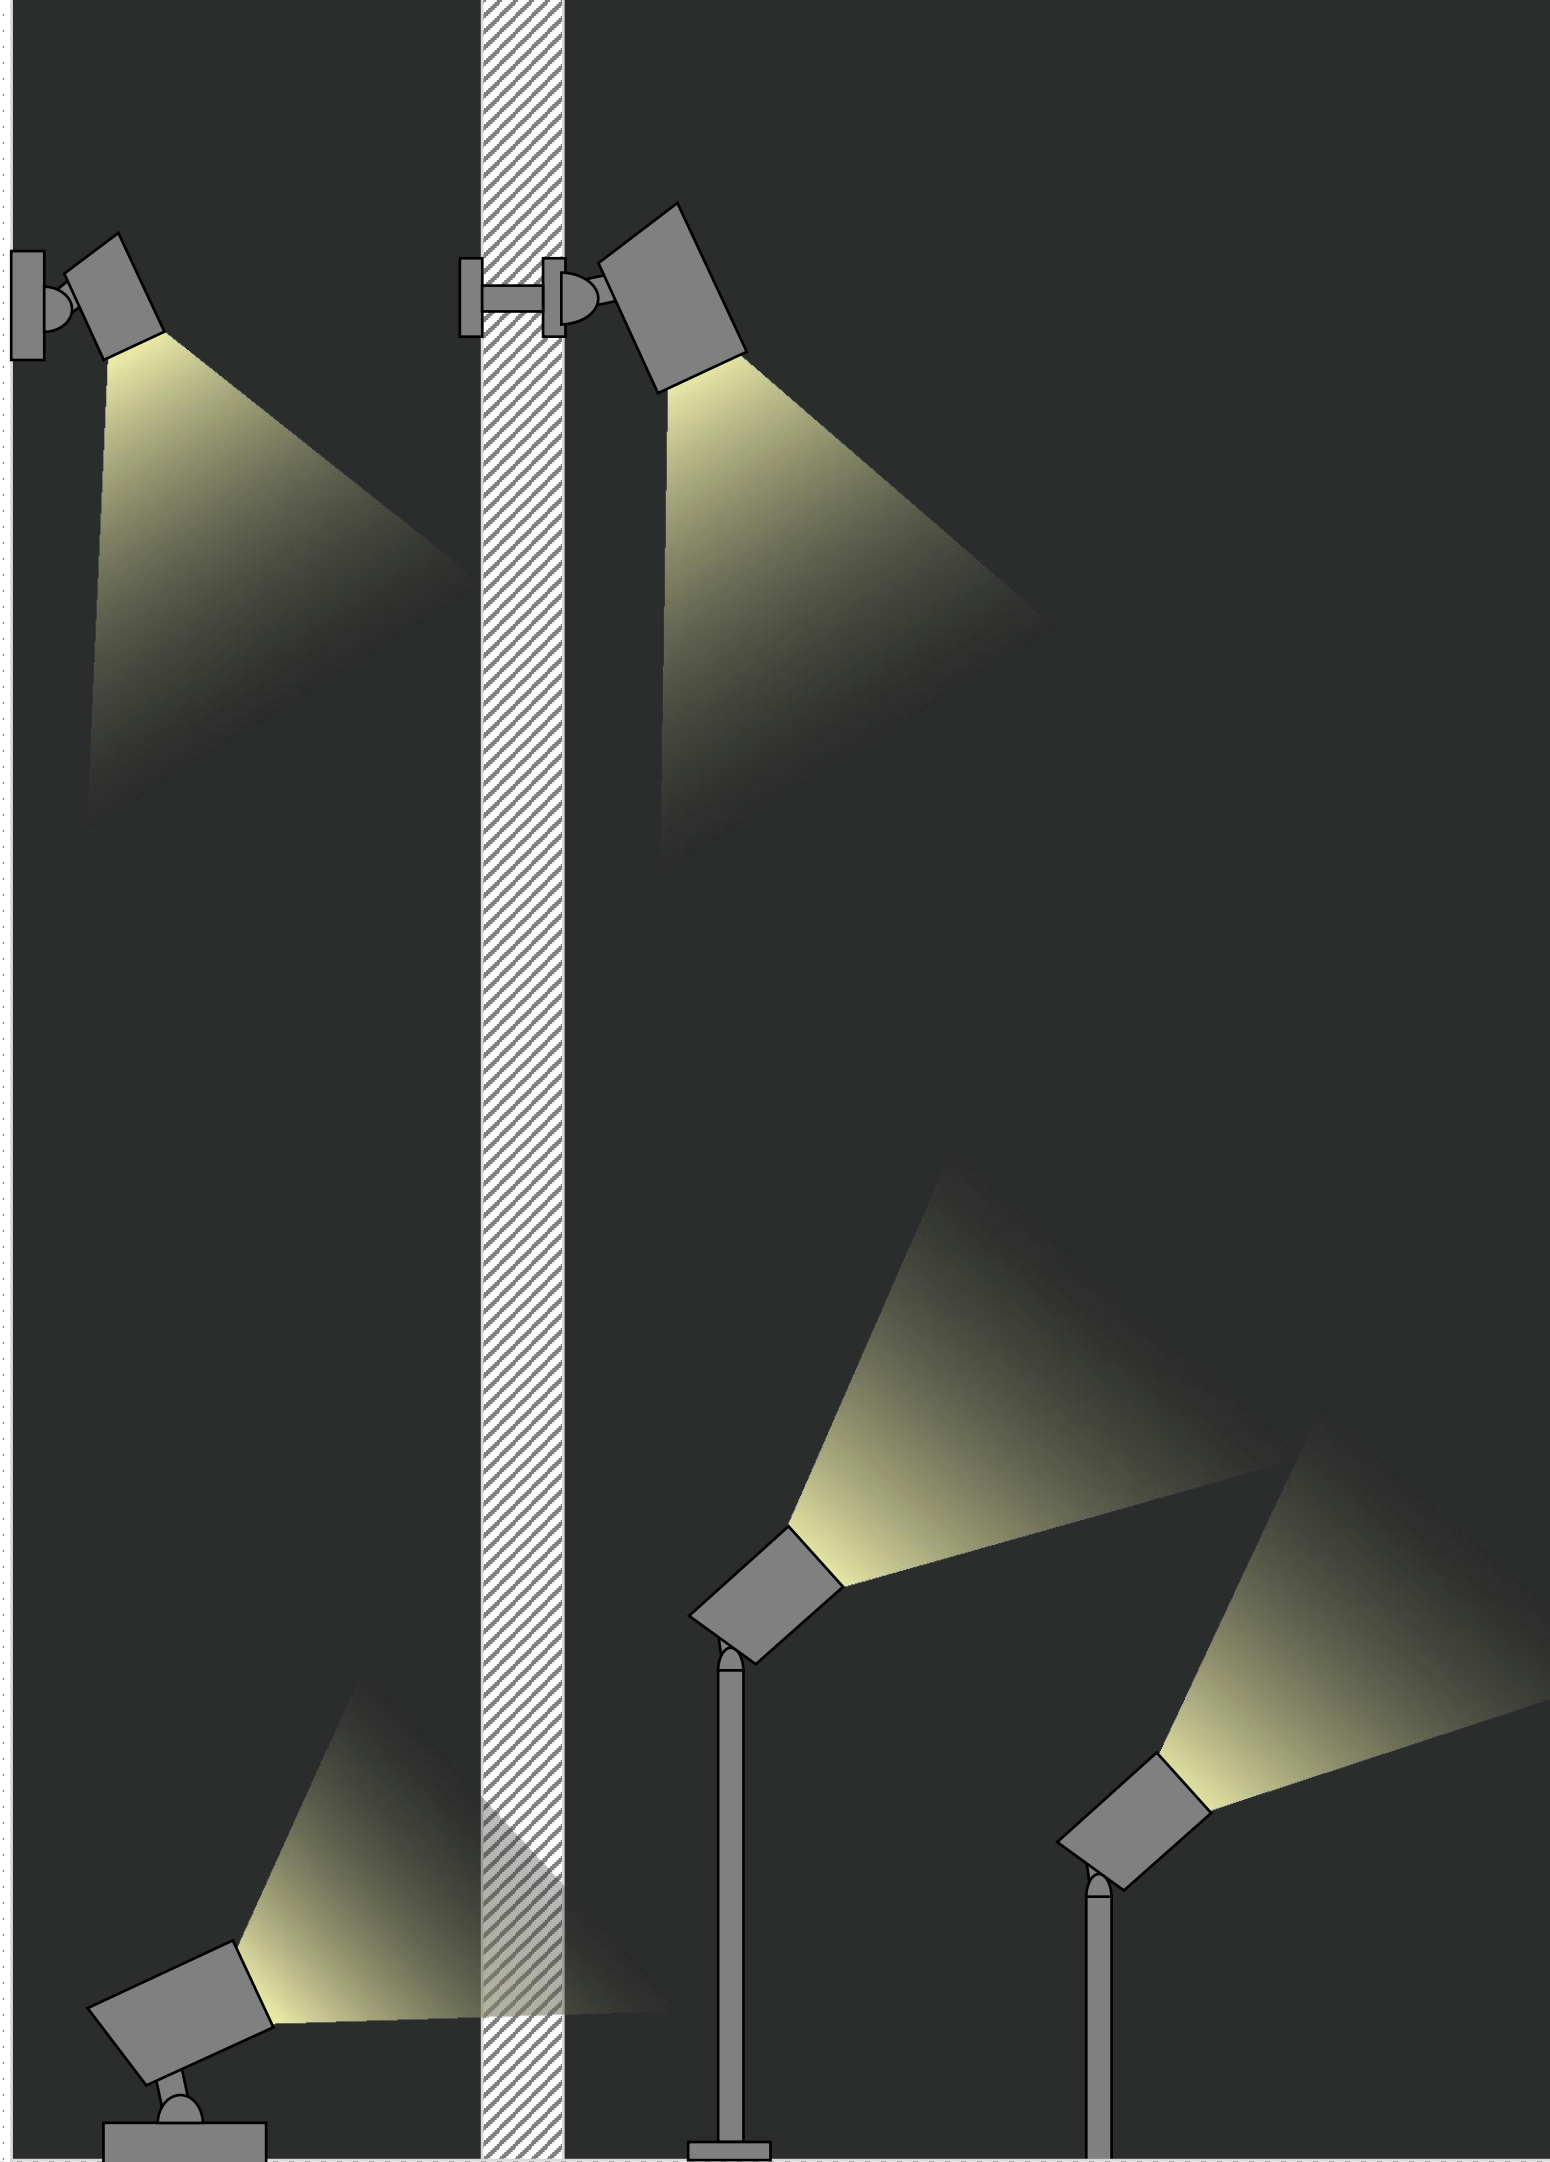

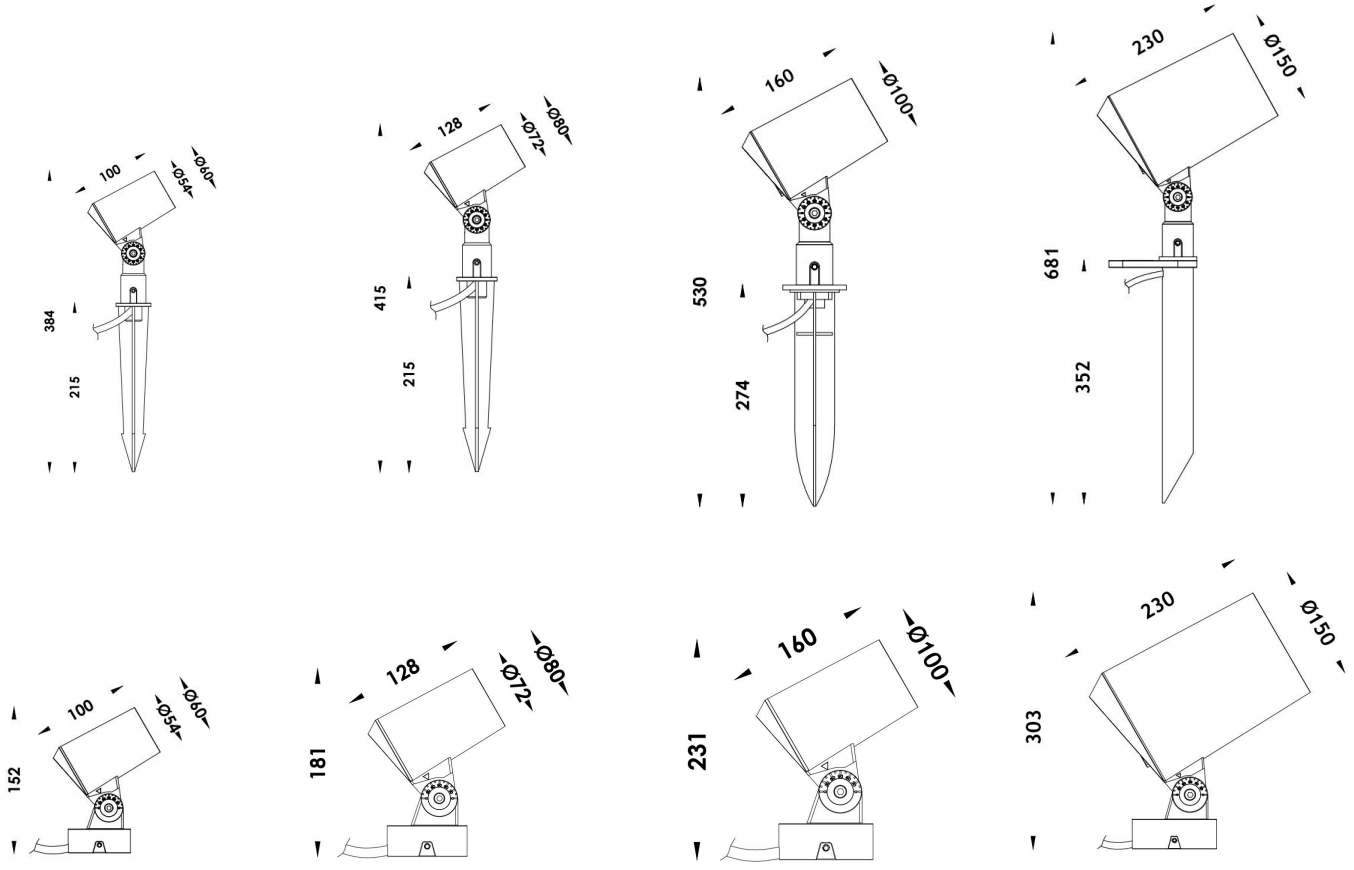

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-3VBA	1*5W	CREE	12/24VDC 120-240VAC	3°/8°	350lm	Single	05	66
	3*2W	OSRAM/CREE	12/24VDC 120-240VAC	15°/25°/40°/60°	330lm	Single		
	1*6W	CREE COB	12/24VDC 120-240VAC	18°/24°/38°/60°	600lm	Single		
	3*3W	OSRAM	12/24VDC	18°/24°/38°/60°	128lm	RGB 3in1		
	3*4W	OSRAM	12/24VDC	18°/24°/38°/60°	168lm	RGBW 4in1		
AL-3VBB	1*10W	CREE	12/24VDC 120-240VAC	3°/8°	750lm	Single	05	66
	4*3W	OSRAM/CREE	12/24VDC 120-240VAC	15°/25°/40°/60°	780lm	Single		
	1*13W	CREE COB	12/24VDC 120-240VAC	18°/24°/38°/60°	1310lm	Single		
	4*3W	OSRAM	12/24VDC	18°/24°/38°/60°	168lm	RGB 3in1		
	4*4W	OSRAM	12/24VDC	18°/24°/38°/60°	224lm	RGBW 4in1		
AL-3VBC	3*5W	CREE	12/24VDC 120-240VAC	3°/8°	1140lm	Single	05	66
	6*3W	OSRAM/CREE	12/24VDC 120-240VAC	15°/25°/40°/60°	1200lm	Single		
	1*20W	CREE COB	12/24VDC 120-240VAC	18°/24°/38°/60°	2200lm	Single		
	6*2.5W	OSRAM	12/24VDC	18°/24°/38°/60°	360lm	RGB 3in1		
	6*3.5W	OSRAM	12/24VDC	18°/24°/38°/60°	480lm	RGBW 4in1		
AL-3VBD	6*7W	CREE	12/24VDC 120-240VAC	3°/8°	2520lm	Single	05	66
	12*3.5W	OSRAM/CREE	12/24VDC 120-240VAC	15°/25°/40°/60°	2520lm	Single		
	1*40W	CREE COB	12/24VDC 120-240VAC	18°/24°/38°/60°	3800lm	Single		
	12*2.5W	OSRAM	12/24VDC	18°/24°/38°/60°	660lm	RGB 3in1		
	12*3.5W	OSRAM	12/24VDC	18°/24°/38°/60°	990lm	RGBW 4in1		


## AL-3VR LED Projector Light



### Product Description

- IP66 for outdoor and indoor lighting applications.
- CREE COB and high power LED light source, high lumen output.
- Four size with power from 12W to 60W.
- RGB 3in1, RGBW 4in1, 2700K, 3000K, 4000K, 6000K, CRI 80+.
- DMX512, Triac, 0-10V, PMW, DALI dimmable.
- Body in die-casting aluminum housing with powder coating suitable for coastal applications.
- Grey, black, white, green and bespoke finishes.
- Various mounting options: ceiling, wall, ground, spike, tree, high mast.
- 5 years warranty.
- CE, ROHS, UKCA certified.



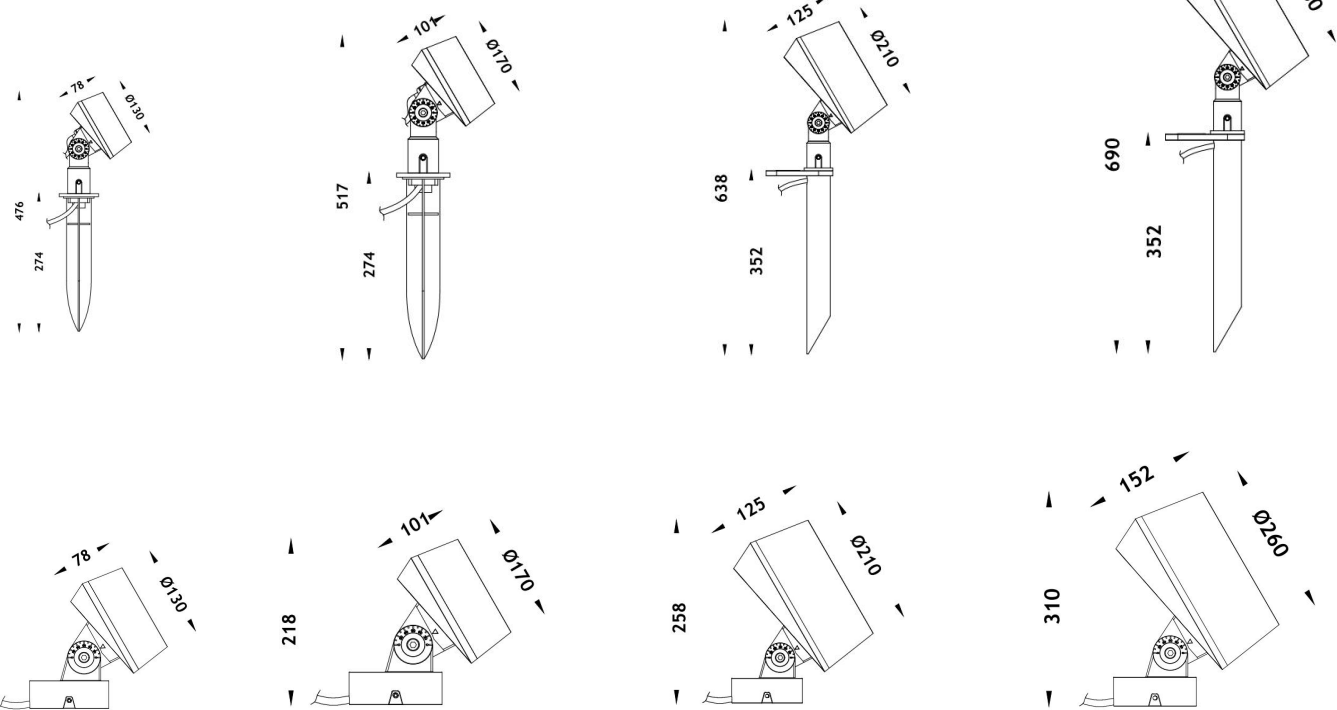

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-3VRA	3*4W	CREE	12/24VDC 120-240VAC	3°/8°	700lm	Single	05	66
	6*3W	OSRAM/CREE	12/24VDC 120-240VAC	15°/25°/40°/60°	1080lm	Single		
	1*18W	CREE COB	12/24VDC 120-240VAC	18°/24°/38°/60°	1520lm	Single		
	6*2.5W	OSRAM	12/24VDC 120-240VAC	18°/24°/38°/60°	380lm	RGB 3in1		
AL-3VRB	6*4W	CREE	12/24VDC 120-240VAC	3°/8°	1340lm	Single	05	66
	12*3W	OSRAM/CREE	12/24VDC 120-240VAC	15°/25°/40°/60°	2450lm	Single		
	1*35W	CREE COB	12/24VDC 120-240VAC	18°/24°/38°/60°	3400lm	Single		
	12*2.5W	OSRAM	12/24VDC 120-240VAC	18°/24°/38°/60°	600lm	RGB 3in1		
AL-3VRC	12*4W	CREE	12/24VDC 120-240VAC	3°/8°	2400lm	Single	05	66
	24*2W	OSRAM/CREE	12/24VDC 120-240VAC	15°/25°/40°/60°	3750lm	Single		
	4*14W	CREE COB	12/24VDC 120-240VAC	18°/24°/38°/60°	4950lm	Single		
	24*2.5W	OSRAM	12/24VDC 120-240VAC	18°/24°/38°/60°	1500lm	RGB 3in1		
AL-3VRD	18*4W	CREE	12/24VDC 120-240VAC	3°/8°	4500lm	Single	05	66
	36*2W	OSRAM/CREE	12/24VDC 120-240VAC	15°/25°/40°/60°	4900lm	Single		
	4*18W	CREE COB	12/24VDC 120-240VAC	18°/24°/38°/60°	6400lm	Single		
	36*3W	OSRAM	12/24VDC 120-240VAC	18°/24°/38°/60°	2700lm	RGB 3in1		
AL-3VRD	36*4W	OSRAM	12/24VDC 120-240VAC	18°/24°/38°/60°	3420lm	RGBW 4in1		









## AL-3VS LED Flood Light



### Product Description

- IP66 for outdoor and indoor lighting applications.
- CREE COB and high power LED light source, high lumen output.
- Four size with power from 24W to 60W.
- RGB 3in1, RGBW 4in1, 2700K, 3000K, 4000K, 6000K, CRI 80+.
- DMX512, Triac, 0-10V, PMW, DALI dimmable.
- Body in die-casting aluminum housing with powder coating suitable for coastal applications.
- Grey, black, white, green and bespoke finishes.
- Various mounting options: ceiling, wall, ground, spike, tree, high mast.
- 5 years warranty.
- CE, ROHS, UKCA certified.



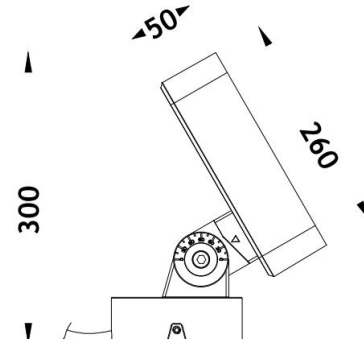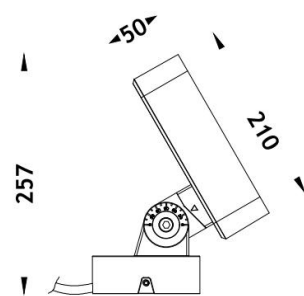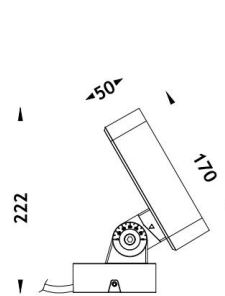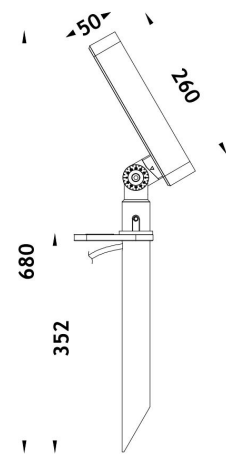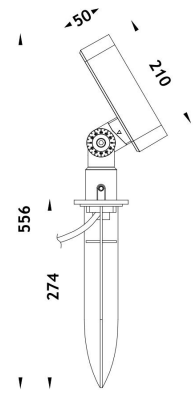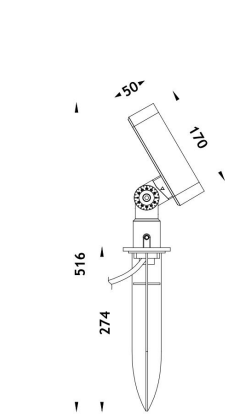

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-3VSA	6*4W	CREE	12/24VDC 120-240VAC	3°/8°	1320lm	Single	05	66
	12*2W	OSRAM/CREE	12/24VDC 120-240VAC	15°/25°/40°/60°	1920lm	Single		
	2*12W	CREE COB	12/24VDC 120-240VAC	18°/24°/38°/60°	2400lm	Single		
	12*2.5W	OSRAM	12/24VDC	18°/24°/38°/60°	1160lm	RGB 3in1		
	12*3.5W	OSRAM	12/24VDC	18°/24°/38°/60°	1400lm	RGBW 4in1		
AL-3VSB	12*3.5W	CREE COB	12/24VDC 120-240VAC	3°/8°	2400lm	Single	05	66
	24*2W	OSRAM/CREE	12/24VDC 120-240VAC	15°/25°/40°/60°	3200lm	Single		
	4*10W	CREE COB	12/24VDC 120-240VAC	18°/24°/38°/60°	3600lm	Single		
	24*2.5W	OSRAM	12/24VDC	18°/24°/38°/60°	2280lm	RGB 3in1		
	24*3W	OSRAM	12/24VDC	18°/24°/38°/60°	2700lm	RGBW 4in1		
AL-3VSC	18*3W	CREE COB	12/24VDC 120-240VAC	3°/8°	3240lm	Single	05	66
	36*1.5W	OSRAM/CREE	12/24VDC 120-240VAC	15°/25°/40°/60°	4320lm	Single		
	4*13W	CREE COB	12/24VDC 120-240VAC	18°/24°/38°/60°	5670lm	Single		
	36*2W	OSRAM	12/24VDC	18°/24°/38°/60°	2740lm	RGB 3in1		
	36*3W	OSRAM	12/24VDC	18°/24°/38°/60°	2100lm	RGBW 4in1		







## AL-3S LED Landscape Spotlight



### Product Description

- RGBW 4in1 DMX512, Triac, 0-10V, PMW, DALI dimmable.
- IP66 for outdoor lighting applications.
- CREE COB LED & high-power LED, high lumen output.
- Three size with power from 3W to 20W.
- Body in die-casting aluminum housing with powder coating suitable for coastal applications.
- Grey, black, white, green and bespoke finishes.
- Various mounting options: ceiling, wall, ground, spike, tree.
- 5 years warranty.
- CE, ROHS, UKCA.



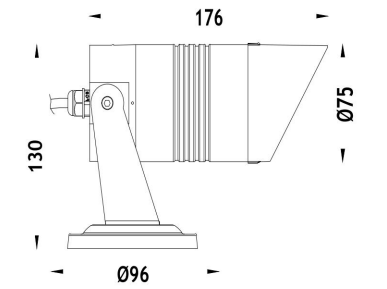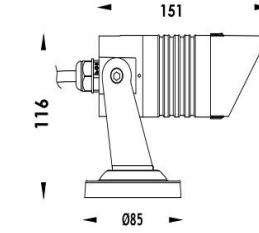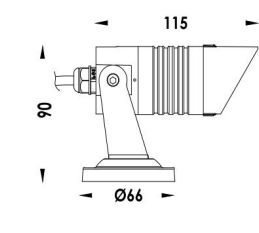

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-3SA	1*4W	OSRAM/CREE	12/24VDC 120-240VAC	5°/8°/10°/30°/40°/60°	380lm	Single	04	65
	1*6W	CREE COB	12/24VDC 120-240VAC	15°/24°/36°/60°	465lm	Single		
	1*3W	OSRAM	12/24VDC	20°/30°/40°/60°	60lm	RGB 3in1		
	1*4W	OSRAM	12/24VDC	20°/30°/40°/60°	80lm	RGBW 4in1		
AL-3SB	3*4W	OSRAM/CREE	12/24VDC 120-240VAC	5°/8°/10°/30°/40°/60°	960lm	Single	04	65
	1*12W	CREE COB	12/24VDC 120-240VAC	15°/24°/36°/60°	1260lm	Single		
	3*2.5W	OSRAM	12/24VDC	20°/30°/40°/60°	220lm	RGB 3in1		
	3*3.5W	OSRAM	12/24VDC	20°/30°/40°/60°	260lm	RGBW 4in1		
AL-3SC	4*4W	OSRAM/CREE	12/24VDC 120-240VAC	5°/8°/10°/30°/40°/60°	1280lm	Single	04	65
	1*16W	CREE COB	12/24VDC 120-240VAC	15°/24°/36°/60°	1840lm	Single		
	4*2.5W	OSRAM	12/24VDC	20°/30°/40°/60°	250lm	RGB 3in1		
	4*3.5W	OSRAM	12/24VDC	20°/30°/40°/60°	350lm	RGBW 4in1		

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-3SAH	1*4W	OSRAM/CREE	12/24VDC 120-240VAC	5°/8°/10°/30°/40°/60°	380lm	Single	04	65
	1*6W	CREE COB	12/24VDC 120-240VAC	15°/24°/36°/60°	465lm	Single		
	1*3W	OSRAM	12/24VDC	20°/30°/40°/60°	60lm	RGB 3in1		
	1*4W	OSRAM	12/24VDC	20°/30°/40°/60°	80lm	RGBW 4in1		
AL-3SBH	3*4W	OSRAM/CREE	12/24VDC 120-240VAC	5°/8°/10°/30°/40°/60°	960lm	Single	04	65
	1*12W	CREE COB	12/24VDC 120-240VAC	15°/24°/36°/60°	1260lm	Single		
	3*2.5W	OSRAM	12/24VDC	20°/30°/40°/60°	220lm	RGB 3in1		
	3*3.5W	OSRAM	12/24VDC	20°/30°/40°/60°	260lm	RGBW 4in1		
AL-3SCH	4*4W	OSRAM/CREE	12/24VDC 120-240VAC	5°/8°/10°/30°/40°/60°	1280lm	Single	04	65
	1*16W	CREE COB	12/24VDC 120-240VAC	15°/24°/36°/60°	1840lm	Single		
	4*2.5W	OSRAM	12/24VDC	20°/30°/40°/60°	250lm	RGB 3in1		
	4*3.5W	OSRAM	12/24VDC	20°/30°/40°/60°	350lm	RGBW 4in1		

## AL-3K-S LED Flood Light





### Product Description

- IP66 for outdoor lighting applications.
- CREE COB LED light source, high lumen output.
- Four size with power from 6W to 22W.
- 2700K, 3000K, 4000K, 6000K, CRI 80+.
- Triac, 0-10V, PMW, DALI dimmable.
- Body in die-casting aluminum housing with powder coating suitable for coastal applications.
- Grey, black, white, green and bespoke finishes.
- Various mounting options: ceiling, wall, ground, spike, tree, high mast.
- 5 years warranty.
- CE, ROHS, UKCA certified.




# AL-3K-S LED Flood Light

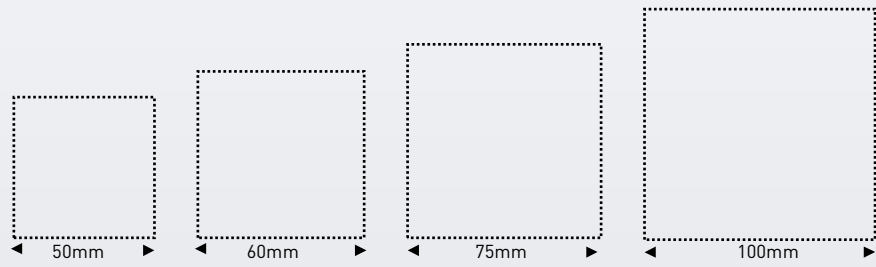


Honeycomb




Radar Circle




Stretch Film





Slanted Hood





Straight Hood


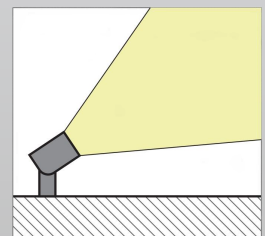


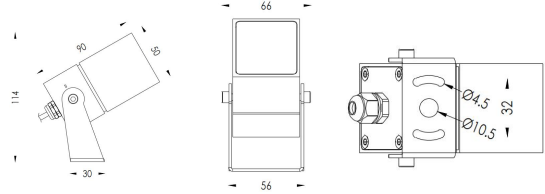



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-3K-S50	1*6.5W	CREE COB	12/24VDC 120-240VAC	15°/24°/36°/55°	550lm	Single	05	66

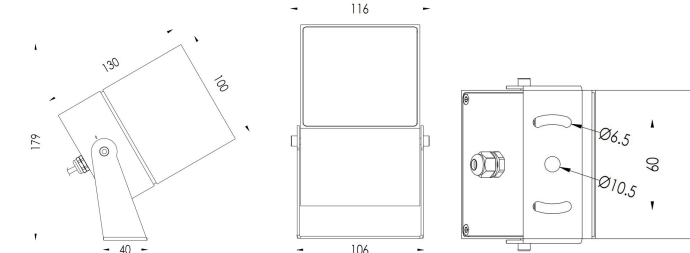


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-3K-S75	1*16W	CREE COB	12/24VDC 120-240VAC	15°/24°/36°/55°	1300lm	Single	05	66

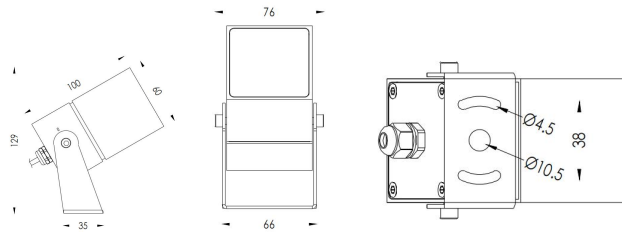


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-3K-S60	1*10W	CREE COB	12/24VDC 120-240VAC	15°/24°/36°/55°	890lm	Single	05	66

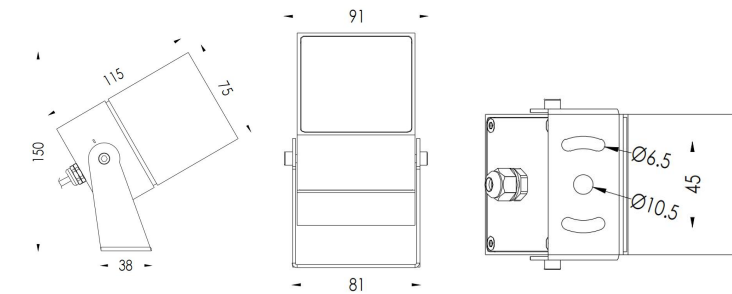


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-3K-S100	1*23W	CREE COB	12/24VDC 120-240VAC	15°/24°/36°/55°	1800lm	Single	05	66

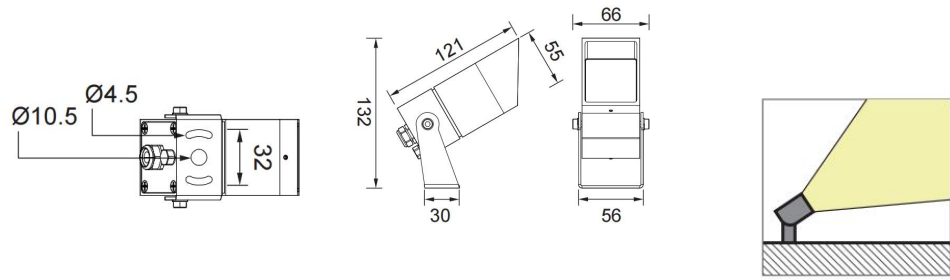


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-3K-SH50	1*6.5W	CREE COB	12/24VDC 120-240VAC	15°/24°/36°/55°	550lm	Single	05	66

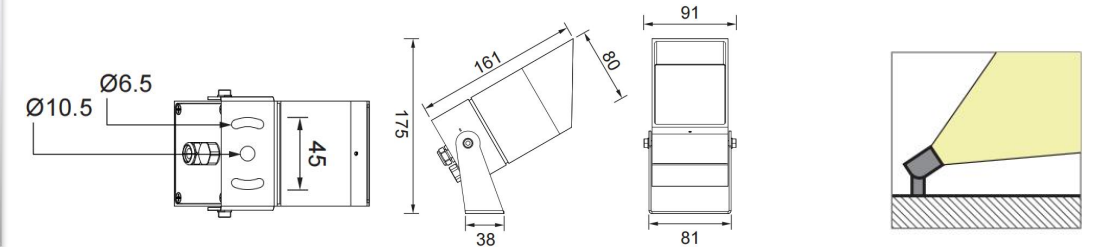


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-3K-SH75	1*16W	CREE COB	12/24VDC 120-240VAC	15°/24°/36°/55°	1300lm	Single	05	66

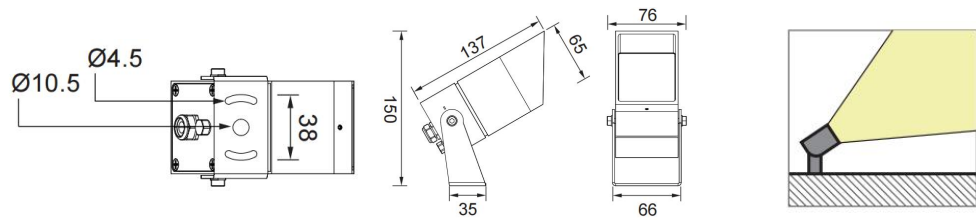


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-3K-SH60	1*10W	CREE COB	12/24VDC 120-240VAC	15°/24°/36°/55°	890lm	Single	05	66

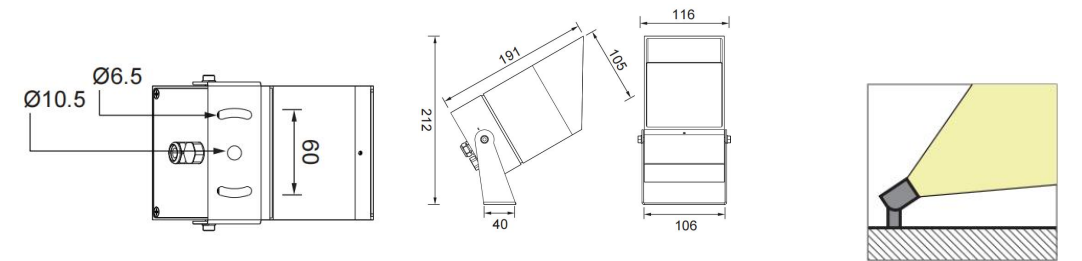


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-3K-SH100	1*23W	CREE COB	12/24VDC 120-240VAC	15°/24°/36°/55°	1800lm	Single	05	66

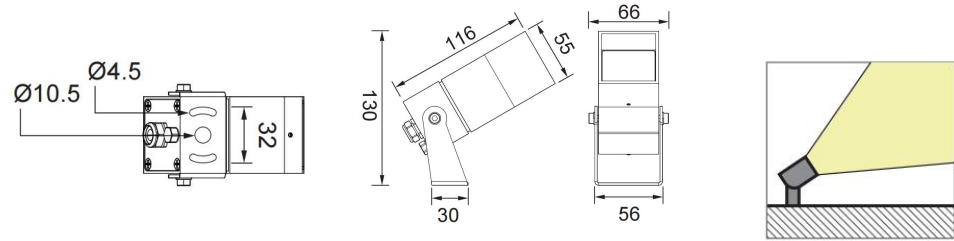


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-3K-SL50	1*6.5W	CREE COB	12/24VDC 120-240VAC	15°/24°/36°/55°	550lm	Single	05	66

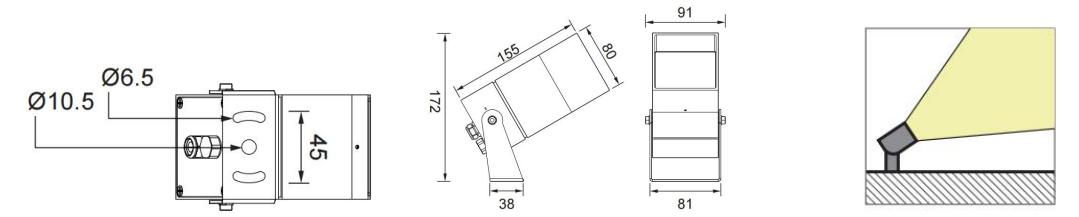

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-3K-SL75	1*16W	CREE COB	12/24VDC 120-240VAC	15°/24°/36°/55°	1300lm	Single	05	66

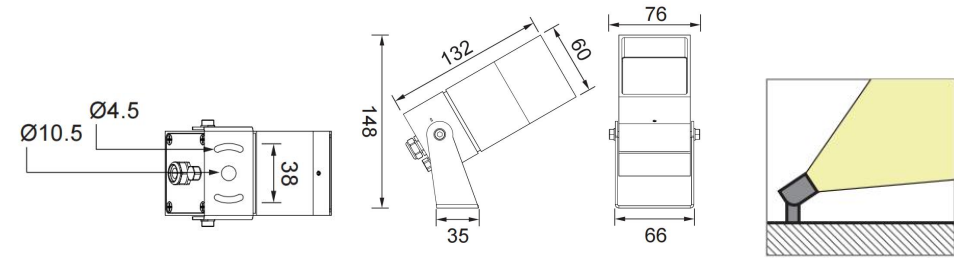

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-3K-SL60	1*10W	CREE COB	12/24VDC 120-240VAC	15°/24°/36°/55°	890lm	Single	05	66

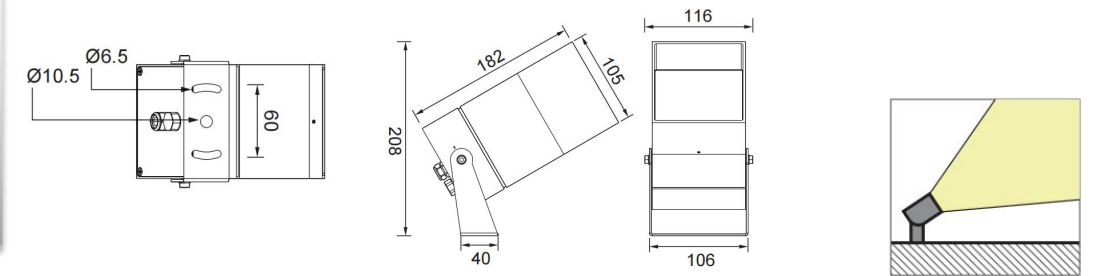


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-3K-SL100	1*23W	CREE COB	12/24VDC 120-240VAC	15°/24°/36°/55°	1800lm	Single	05	66

## 3K-R LED Flood Light



### Product Description

- IP66 for outdoor lighting applications.
- CREE COB LED light source, high lumen output.
- Four size with power from 6W to 22W.
- 2700K, 3000K, 4000K, 6000K, CRI 80+.
- Triac, 0-10V, PWM, DALI dimmable.
- Body in die-casting aluminum housing with powder coating suitable for coastal applications.
- Grey, black, white, green and bespoke finishes.
- Various mounting options: ceiling, wall, ground, spike, tree, high mast.
- 5 years warranty.
- CE, ROHS, UKCA certified.

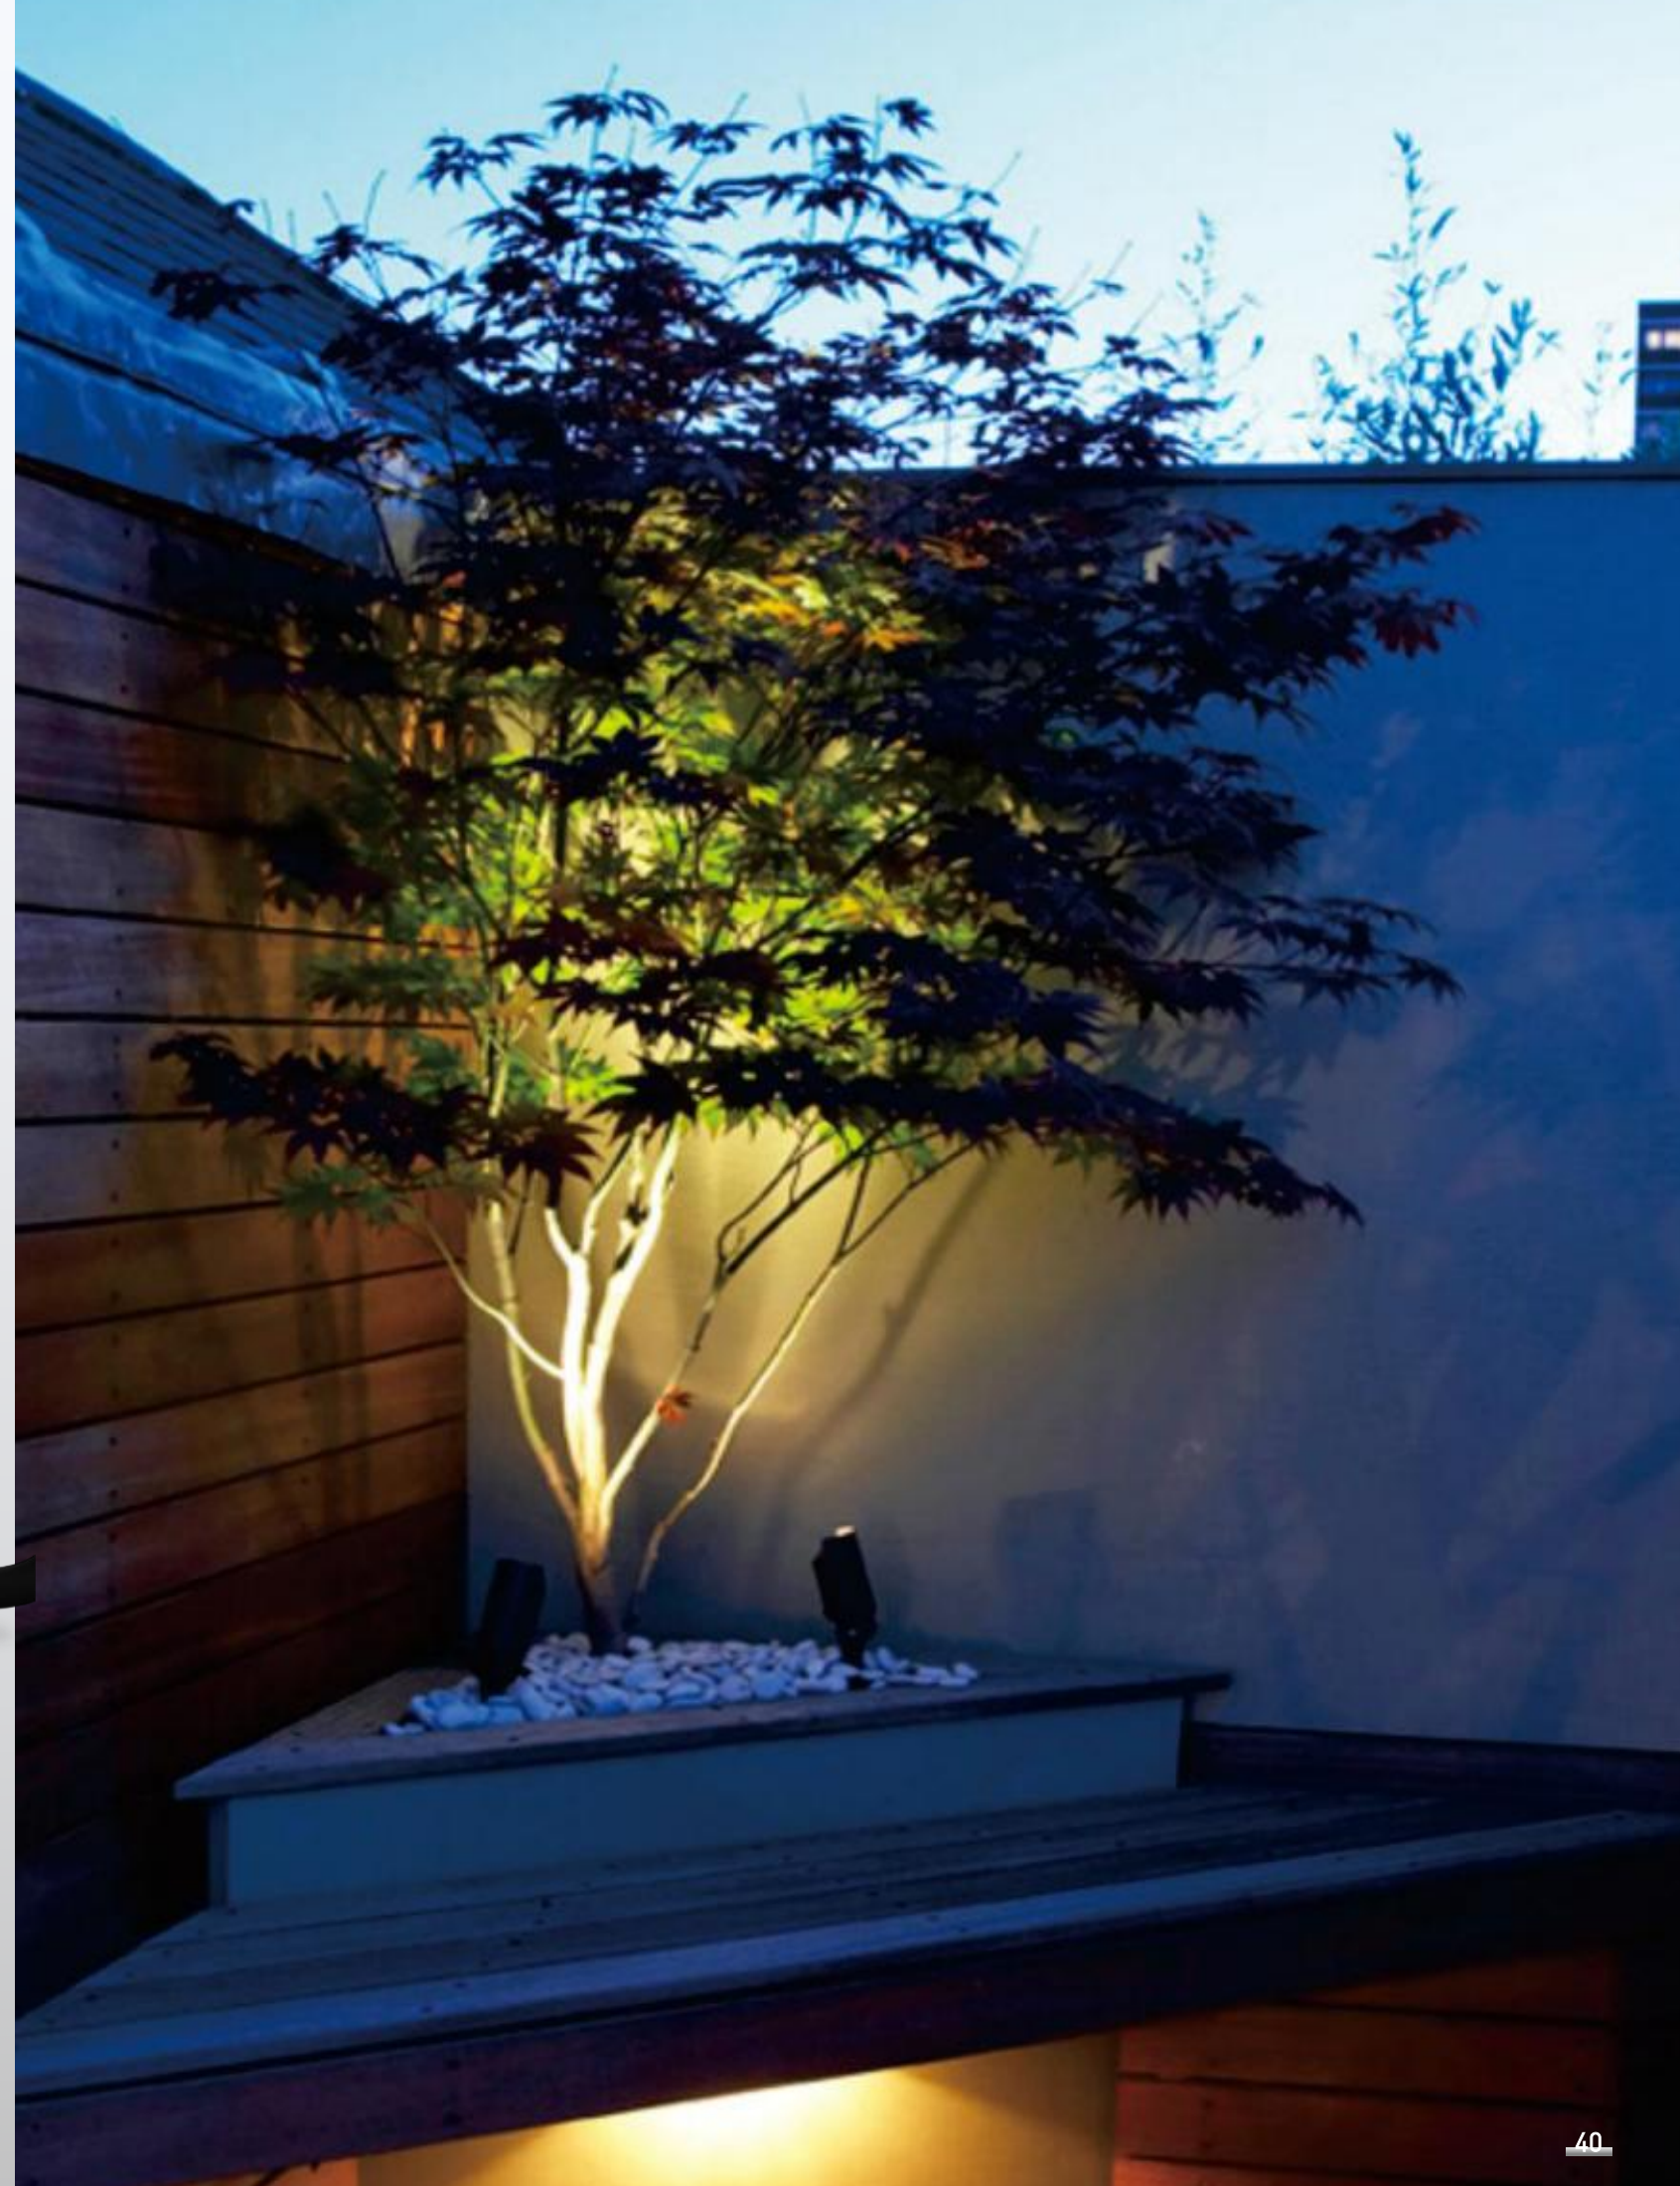

# AL-3K-S LED Flood Light



◀ 33mm ▶



◀ 43mm ▶



◀ 55mm ▶




◀ 69mm ▶



◀ 85mm ▶



◀ 105mm ▶




Honeycomb




Radar Circle





Stretch Film




Slanted Hood




Straight Hood

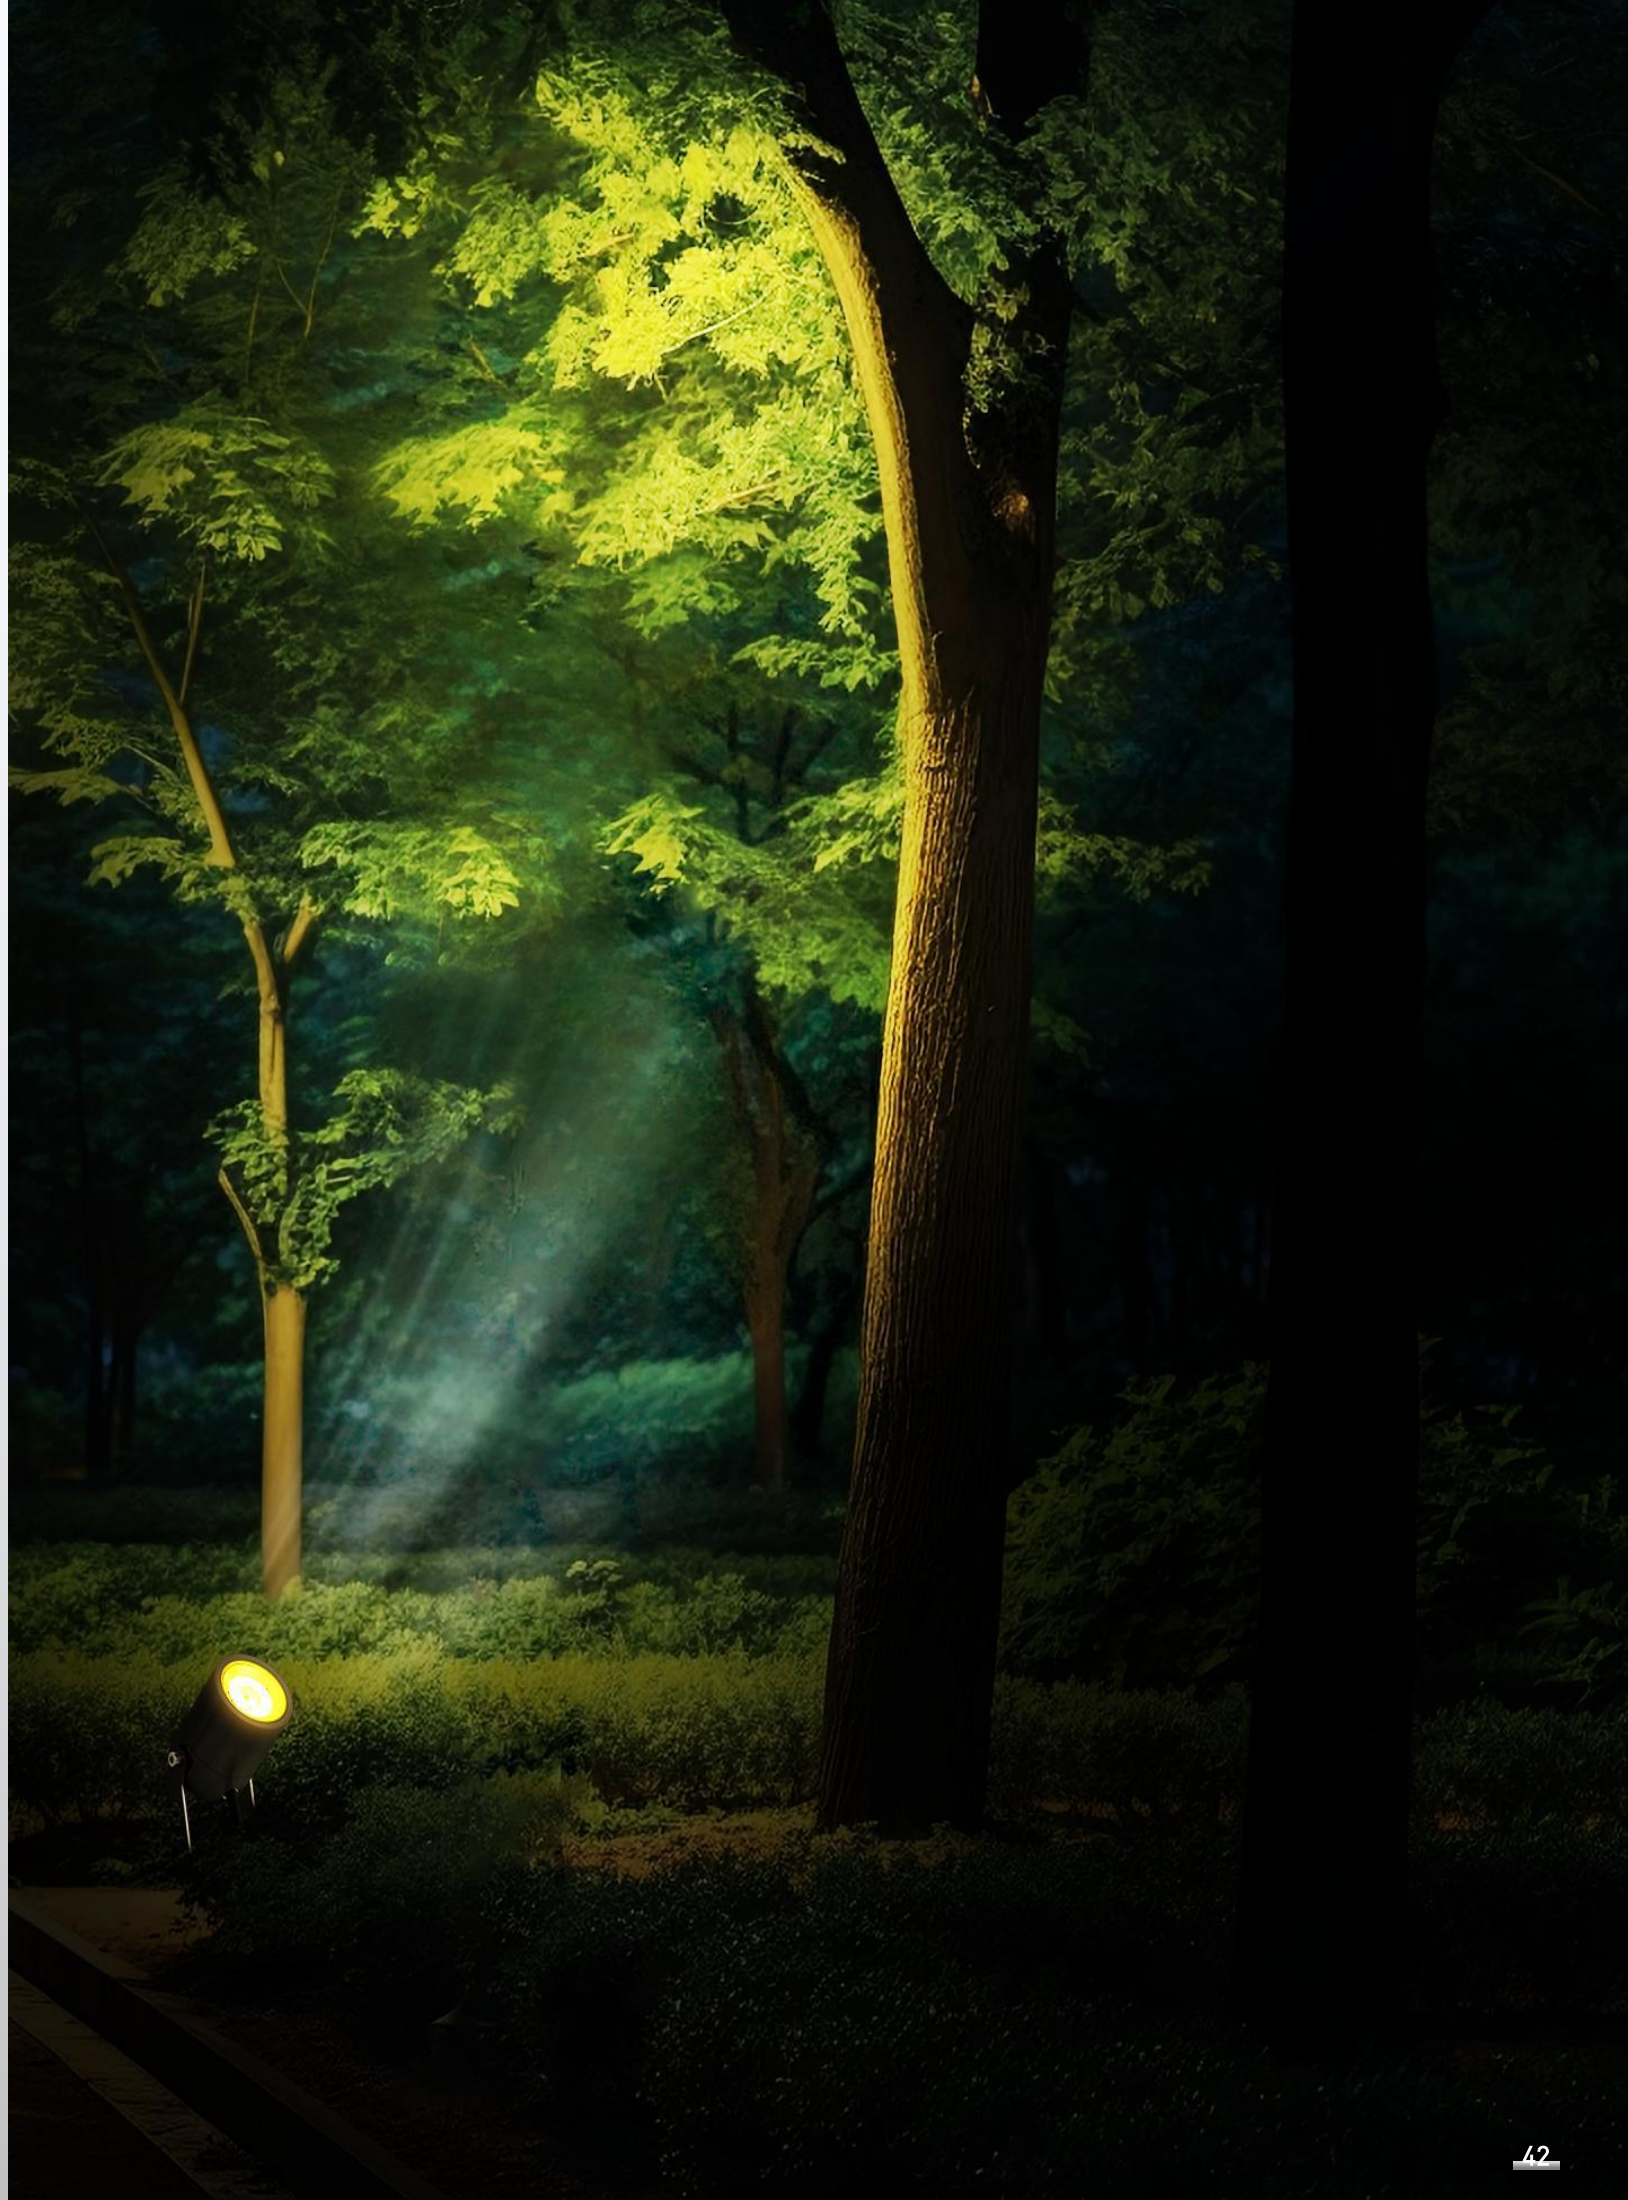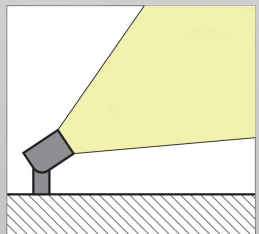


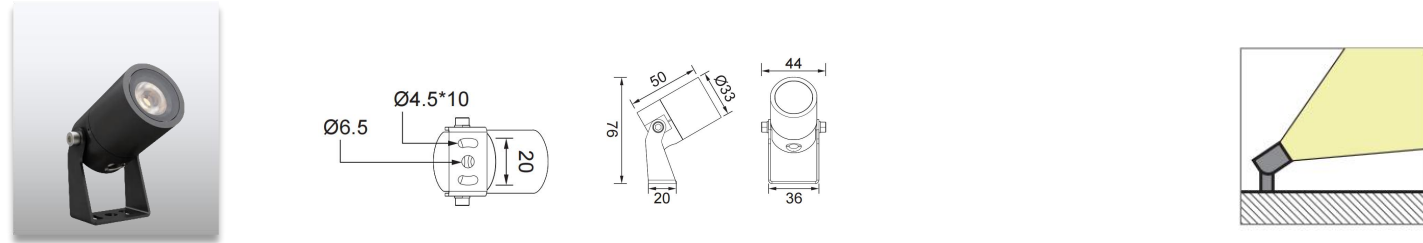


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-3K-R33	1*2.5W	CREE COB	12/24VDC 120-240VAC	5°/10°/15°/20°/30°/40°/ 60°/10°/45°/25°/45°	150lm	Single	05	66

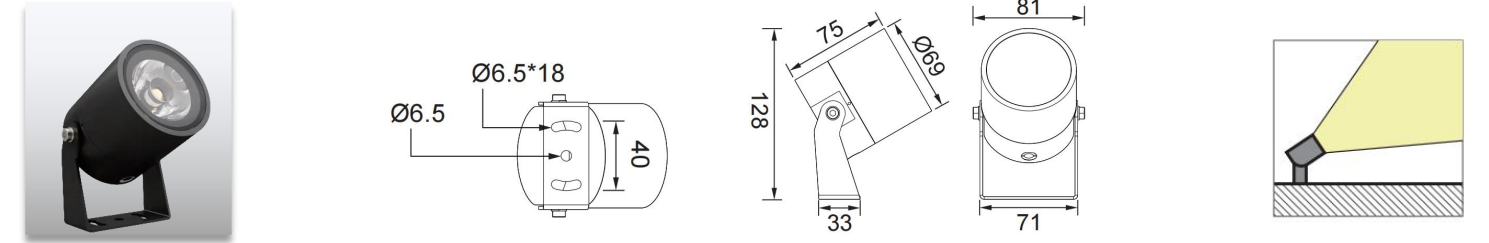


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-3K-R69	1*10W	CREE COB	12/24VDC 120-240VAC	15°/24°/36°/60°	1000lm	Single	05	66

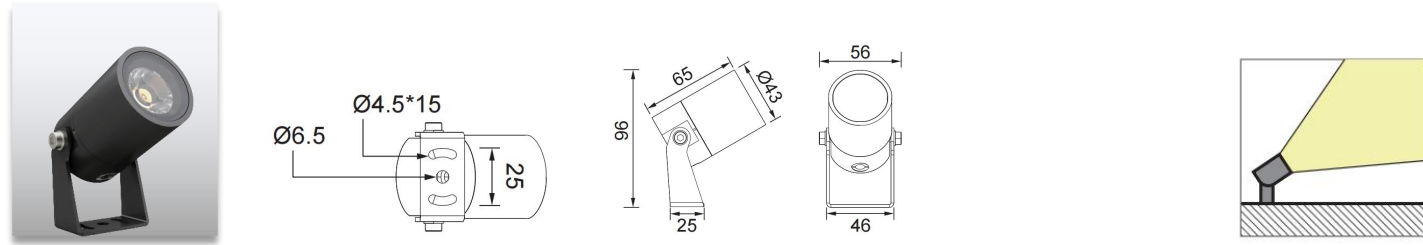


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-3K-R43	1*4W	CREE COB	12/24VDC 120-240VAC	15°/24°/36°/60°	500lm	Single	05	66

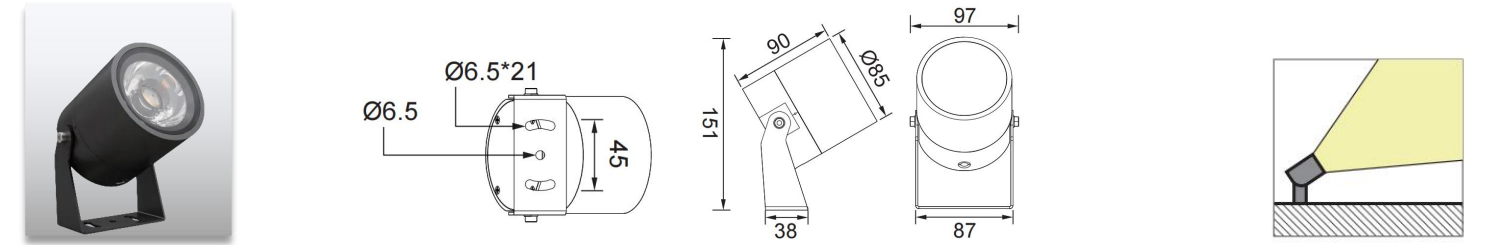


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-3K-R85	1*15W	CREE COB	12/24VDC 120-240VAC	12°/24°/36°/55°	1700lm	Single	05	66

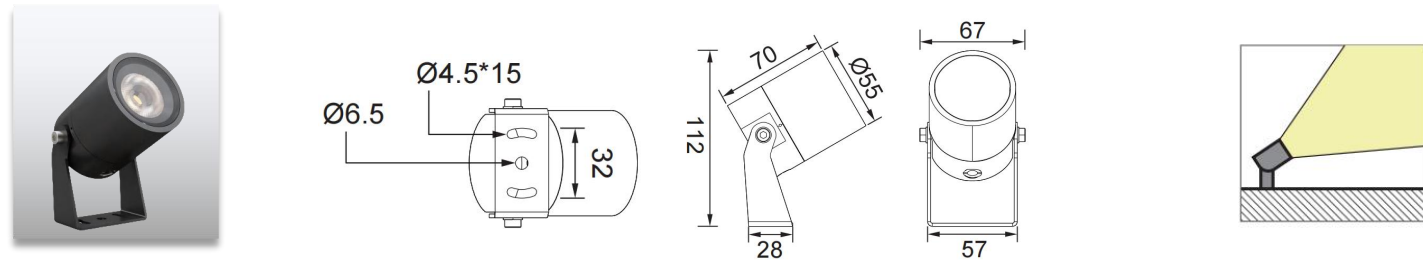


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-3K-R55	1*6W	CREE COB	12/24VDC 120-240VAC	15°/24°/36°/60°	850lm	Single	05	66

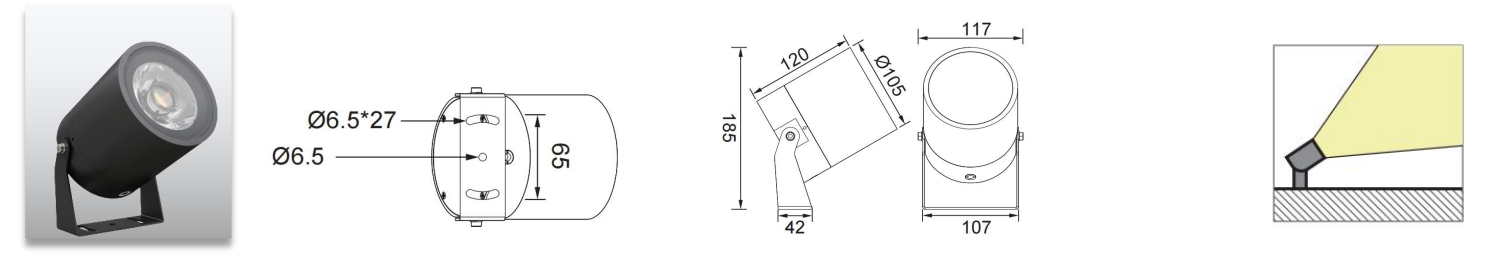


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-3K-R105	1*23W	CREE COB	12/24VDC 120-240VAC	15°/24°/36°/55°	2000lm	Single	05	66

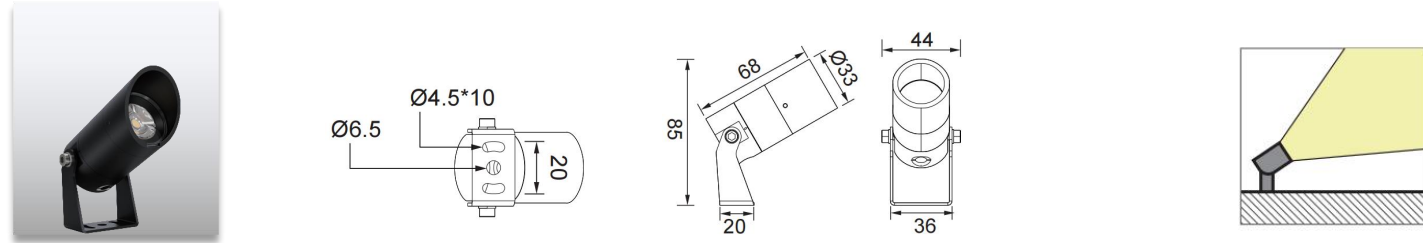


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-3K-RH33	1*2.5W	CREE COB	12/24VDC 120-240VAC	5°/10°/15°/20°/30°/40°/60°/10°45°/25°45°	150lm	Single	05	66

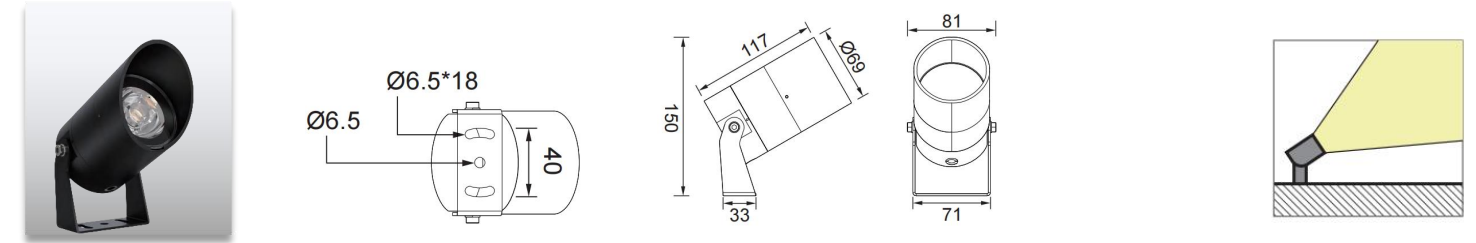


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-3K-RH69	1*10W	CREE COB	12/24VDC 120-240VAC	15°/24°/36°/60°	1000lm	Single	05	66

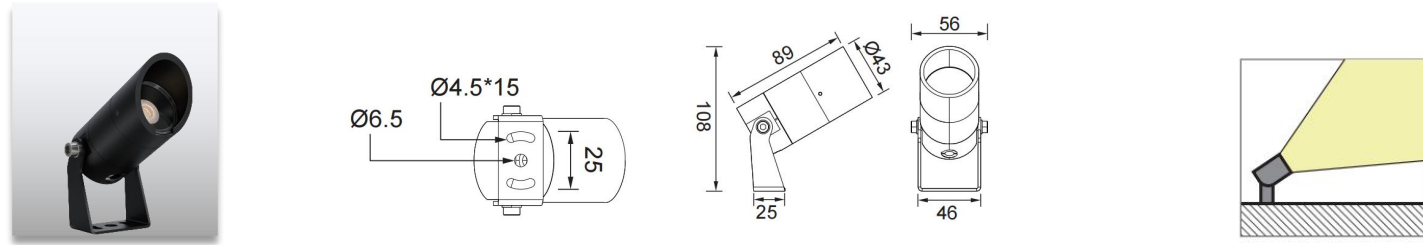


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-3K-RH43	1*4W	CREE COB	12/24VDC 120-240VAC	15°/24°/36°/60°	500lm	Single	05	66

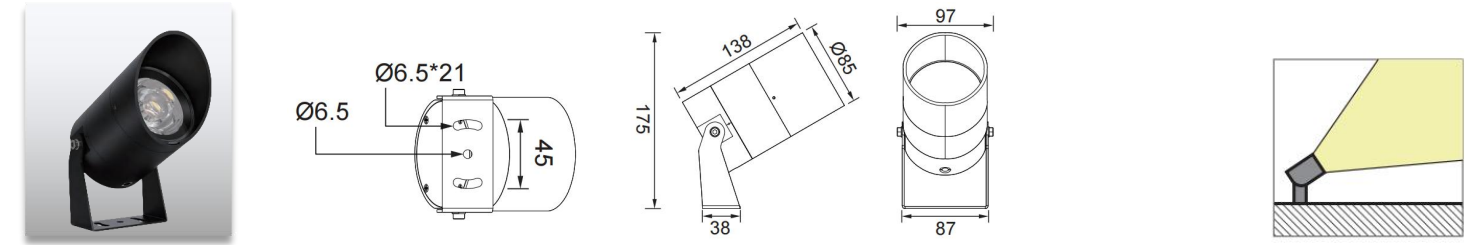


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-3K-RH85	1*15W	CREE COB	12/24VDC 120-240VAC	12°/24°/36°/55°	1700lm	Single	05	66

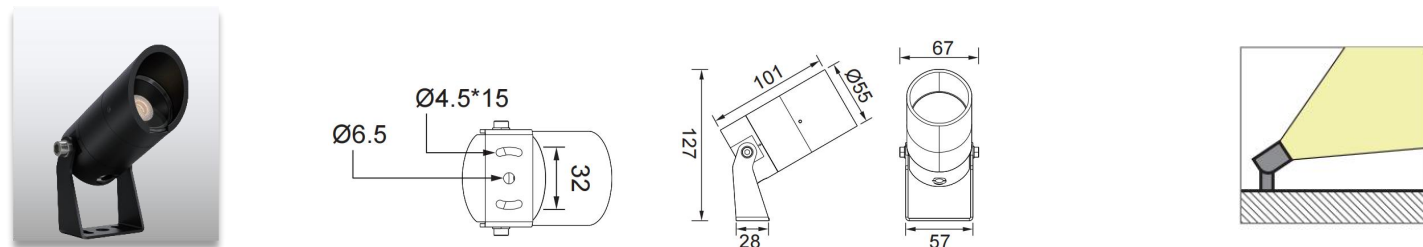


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-3K-RH55	1*6W	CREE COB	12/24VDC 120-240VAC	15°/24°/36°/60°	850lm	Single	05	66

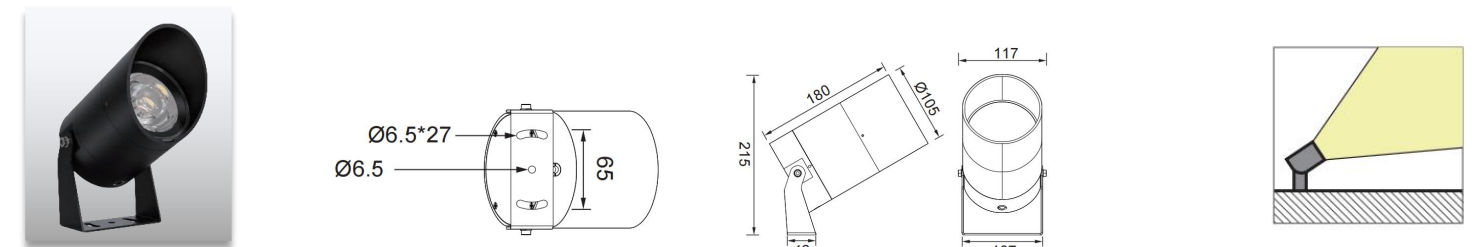


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-3K-RH105	1*23W	CREE COB	12/24VDC 120-240VAC	15°/24°/36°/55°	2000lm	Single	05	66

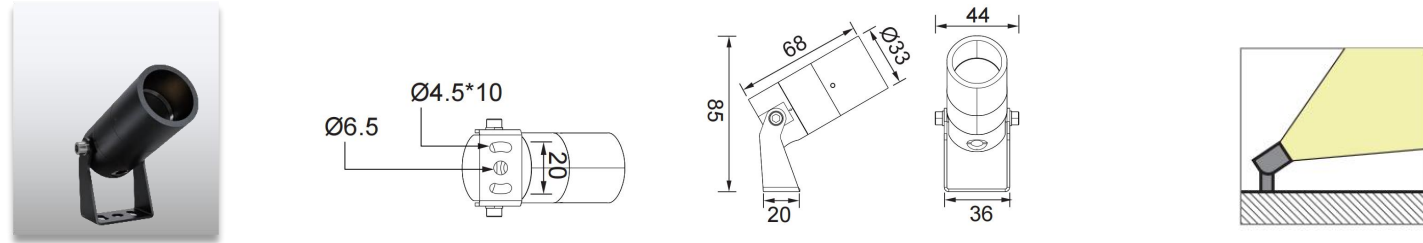


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-3K-RL33	1*2.5W	CREE COB	12/24VDC 120-240VAC	5°/10°/15°/20°/30°/40°/ 60°/10°/45°/25°/45°	150lm	Single	05	66

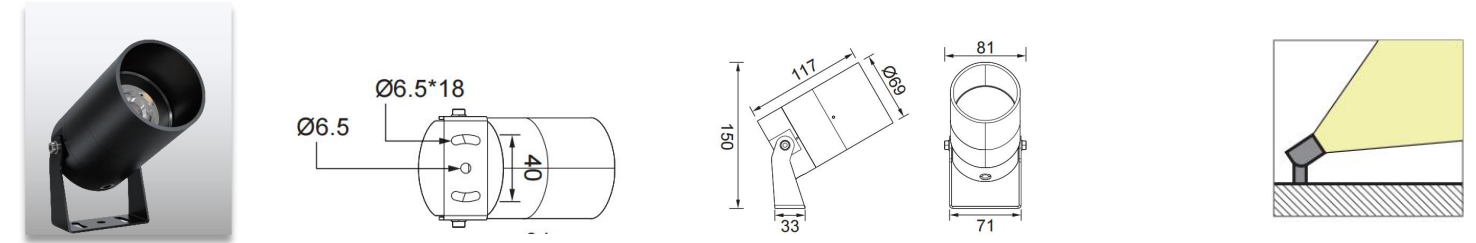


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-3K-RL69	1*10W	CREE COB	12/24VDC 120-240VAC	15°/24°/36°/60°	1000lm	Single	05	66

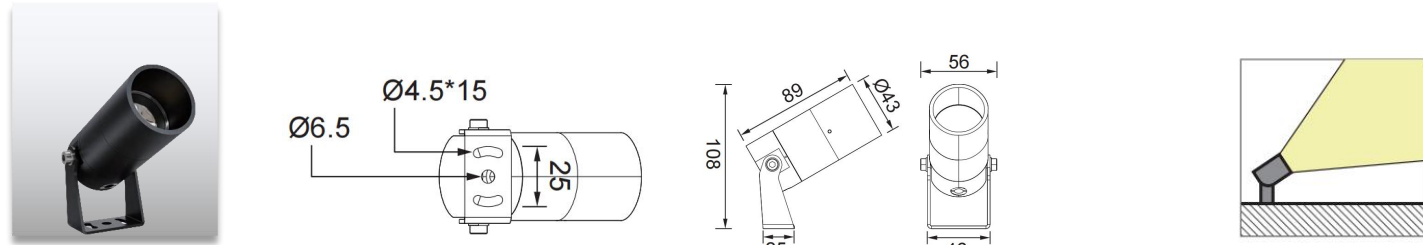


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-3K-RL43	1*4W	CREE COB	12/24VDC 120-240VAC	15°/24°/36°/60°	500lm	Single	05	66

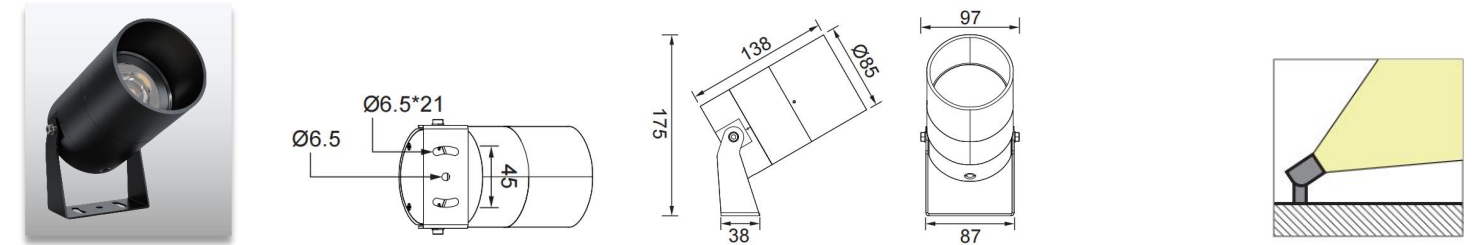

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-3K-RL85	1*15W	CREE COB	12/24VDC 120-240VAC	12°/24°/36°/55°	1700lm	Single	05	66

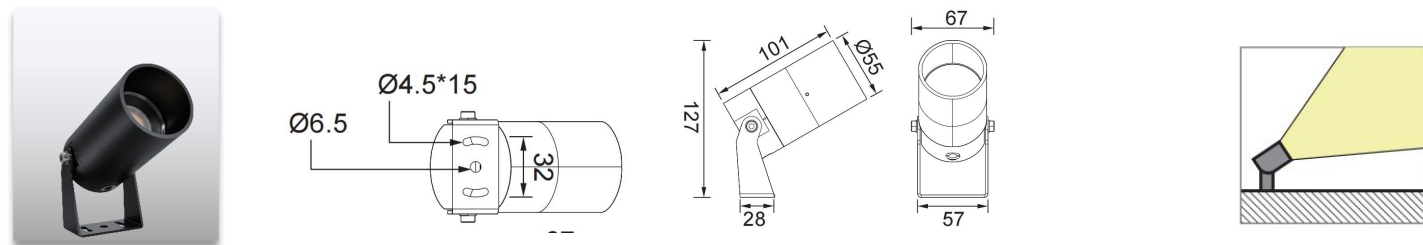

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-3K-RL55	1*6W	CREE COB	12/24VDC 120-240VAC	15°/24°/36°/60°	850lm	Single	05	66

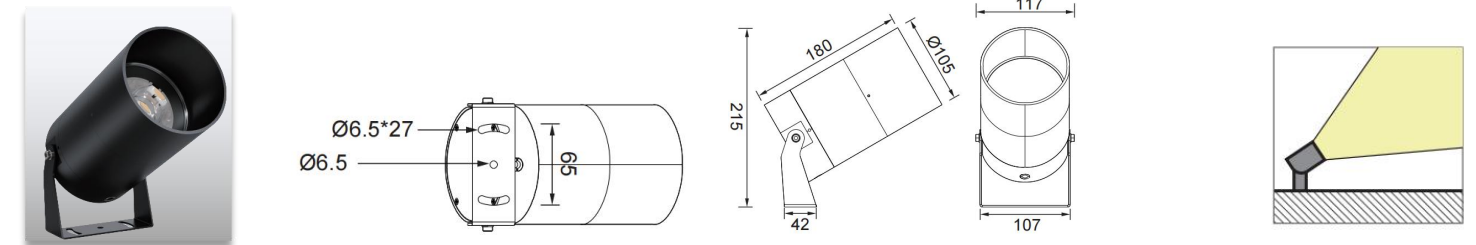

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-3K-RL105	1*23W	CREE COB	12/24VDC 120-240VAC	15°/24°/36°/55°	2000lm	Single	05	66

AL-2A LED In-ground Light




## AL-2A LED In-ground Light




## Product Description

- IP67 for outdoor lighting applications.
- Surface cover in 316L stainless steel with Titanium plating, suitable for coastal applications.
- Body in die-casting aluminum with powder coating, durable and robust.
- Tilt angle of luminaire is adjustable, just turn knob to tilt the light distribution up to 25 degrees.
- Optical design available in versions: tilable, narrow, wide and asymmetric.
- RGBW 4in1 DMX512, Triac, 0-10V, PWM, DALI dimmable.
- IK10, over 4000kg loading capacity.
- CREE COB LED & high-power LED, high lumen output.
- Six size with power from 3W to 40W optional.
- 5 years warranty.
- CE, ROHS, UKCA certified.



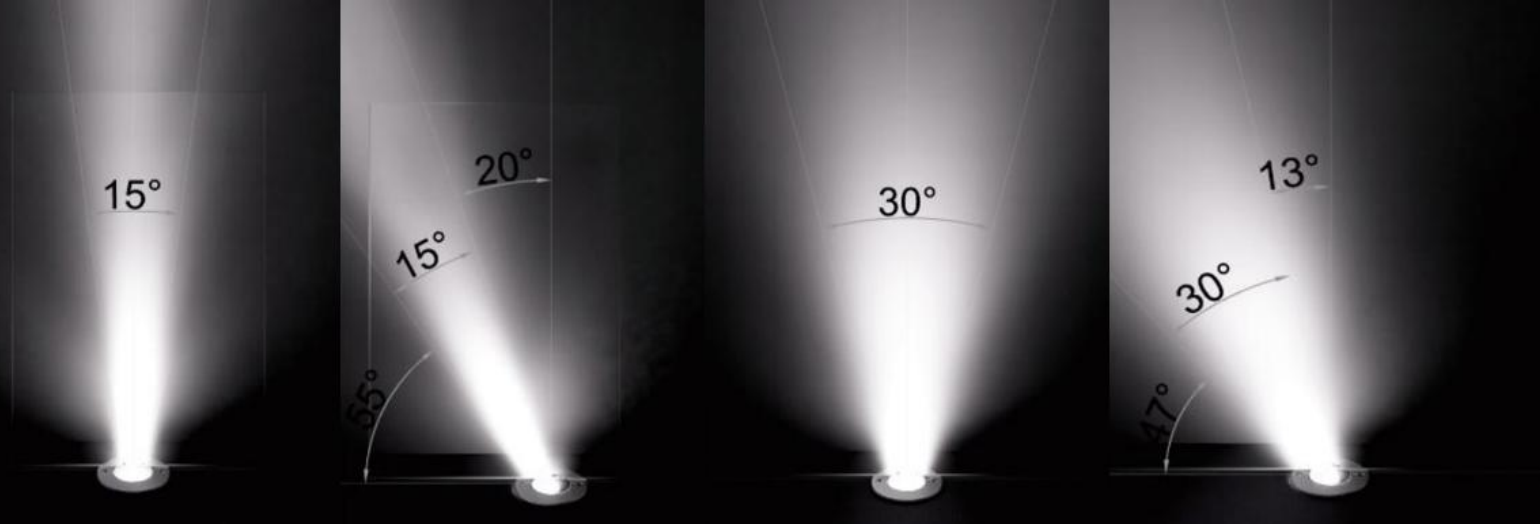

Adjust the knob to tilt the light distribution up to 25 degrees.

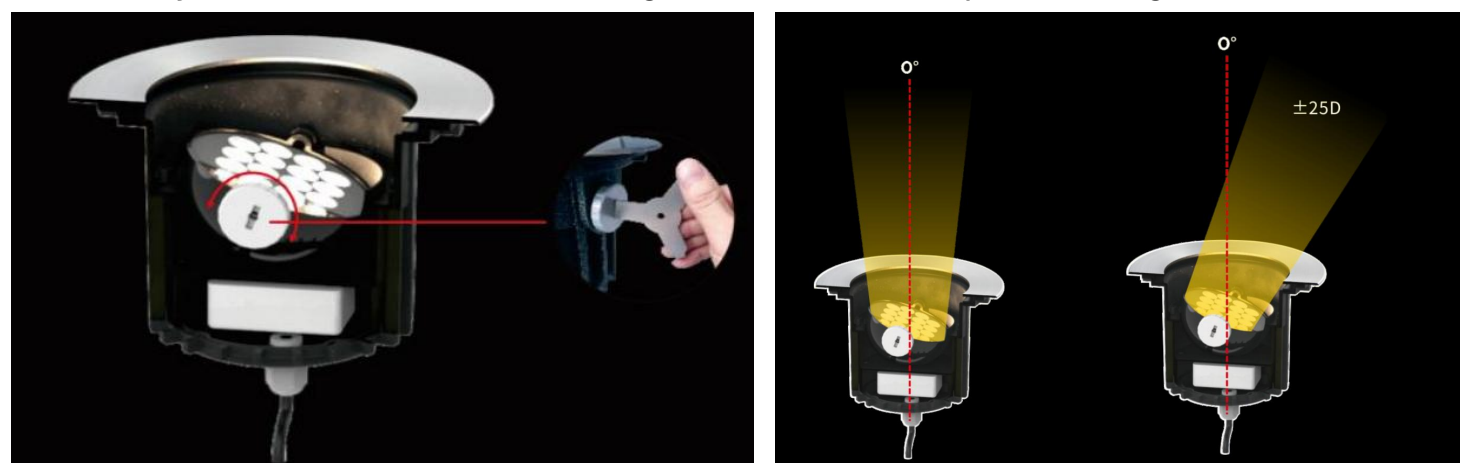

Warm White  
3000k

Natural White  
4000k


Cool White  
6000k

Power  
-1x2W  
-1x36W


Beam Angle  
-18°/24°/38°/60°  
-10\*45°/20\*65°


LED  
-OSRAM  
-CREE



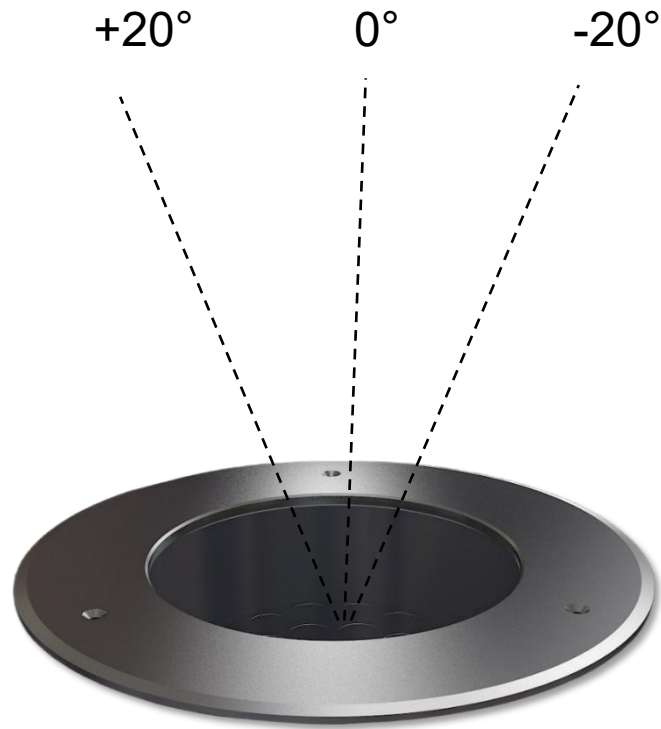




Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2AAB-S1	1*2W	OSRAM/CREE	12/24VDC 120-240VAC	5°/8°/15°/25°/40°/60°/10°*45°/20°*65° 12°/25°/40°/60° 12°/25°/40°/60°	157lm	Single RGB 3in1 RGBW 4in1	08	67
	1*3W	OSRAM	12/24VDC		60lm			
	1*4W	OSRAM	12/24VDC		80lm			
AL-2AAB-S2	2*3W	CREE	12/24VDC 120-240VAC	15°/25°/40°/60°/10°*45°/20°*65° 3°/8° 18°/24°/38°/60° 18°/24°/38°/60°	465lm	Single Single RGB 3in1 RGBW 4in1	08	67
	3*2W	CREE/OSRAM	12/24VDC 120-240VAC		465lm			
	2*3W	OSRAM	12/24VDC		135lm			
	2*4W	OSRAM	12/24VDC		182lm			
AL-2AAB-S3	4*3W	CREE	12/24VDC 120-240VAC	15°/25°/40°/60°/10°*45°/20°*65° 3°/8° 18°/24°/38°/60° 18°/24°/38°/60°	920lm	Single Single RGB 3in1 RGBW 4in1	08	67
	6*2W	CREE/OSRAM	12/24VDC 120-240VAC		920lm			
	4*2.5W	OSRAM	12/24VDC		250lm			
	4*3.5W	OSRAM	12/24VDC		430lm			
AL-2AAB-S4	6*3W	CREE	12/24VDC 120-240VAC	15°/25°/40°/60°/10°*45°/20°*65° 3°/8° 18°/24°/38°/60° 18°/24°/38°/60°	1310lm	Single Single RGB 3in1 RGBW 4in1	10	67
	9*2W	CREE/OSRAM	12/24VDC 120-240VAC		1310lm			
	6*2.5W	OSRAM	12/24VDC		425lm			
	6*3.5W	OSRAM	12/24VDC		568lm			
AL-2AAB-S5	9*3W	CREE	12/24VDC 120-240VAC	15°/25°/40°/60°/10°*45°/20°*65° 3°/8° 18°/24°/38°/60° 18°/24°/38°/60°	1800lm	Single Single RGB 3in1 RGBW 4in1	10	67
	12*2W	CREE/OSRAM	12/24VDC 120-240VAC		1800lm			
	9*2.5W	OSRAM	12/24VDC		730lm			
AL-2AAB-S6	9*3W	CREE	12/24VDC 120-240VAC	15°/25°/40°/60°/10°*45°/20°*65° 3°/8° 18°/24°/38°/60° 18°/24°/38°/60°	2800lm	Single Single RGB 3in1 RGBW 4in1	10	67
	18*2W	CREE/OSRAM	12/24VDC 120-240VAC		2800lm			
	12*2.5W	OSRAM	12/24VDC		1100lm			

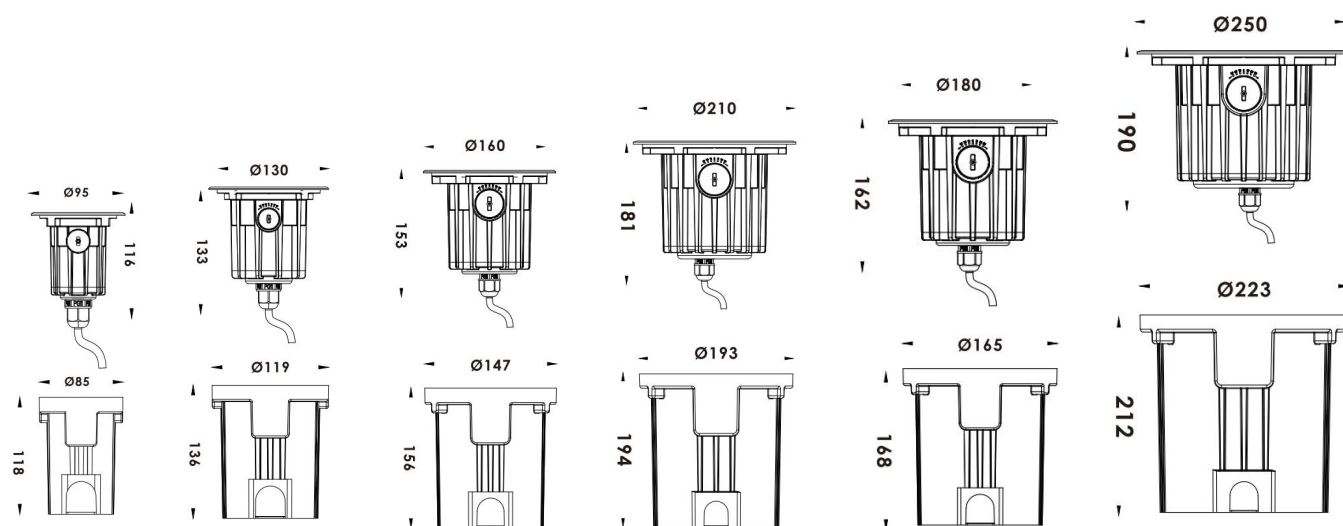

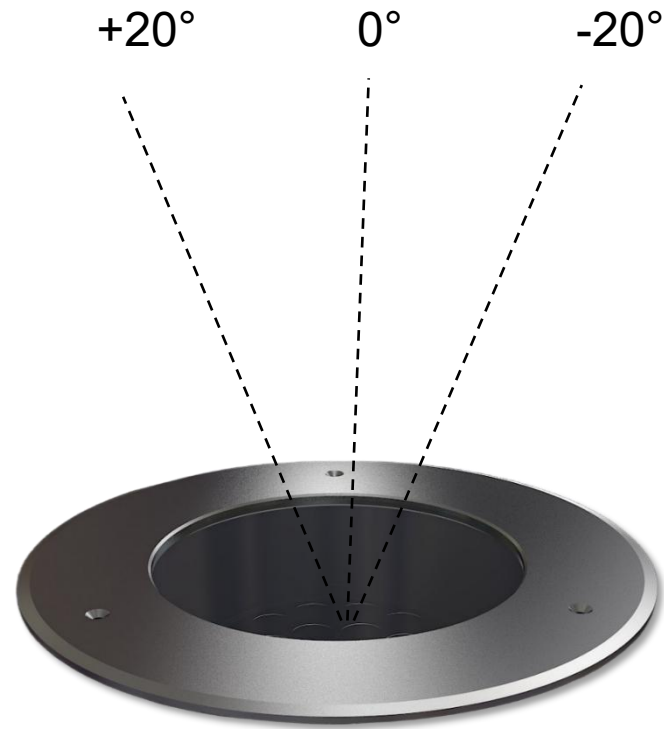




Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2AAR-S2	1*6W	CREE COB	12/24VDC 120-240VAC	18°/24°/38°/60°	445lm	Single	08	67
AL-2AAR-S3	1*12W	CREE COB	12/24VDC 120-240VAC	18°/24°/38°/60°	1120lm	Single	08	67
AL-2AAR-S4	1*20W	CREE COB	12/24VDC 120-240VAC	18°/24°/38°/60°	1438lm	Single	10	67
AL-2AAR-S5	1*25W	CREE COB	12/24VDC 120-240VAC	18°/24°/38°/60°	2130lm	Single	10	67
AL-2AAR-S6	1*36W	CREE COB	12/24VDC 120-240VAC	18°/24°/38°/60°	2986lm	Single	10	67

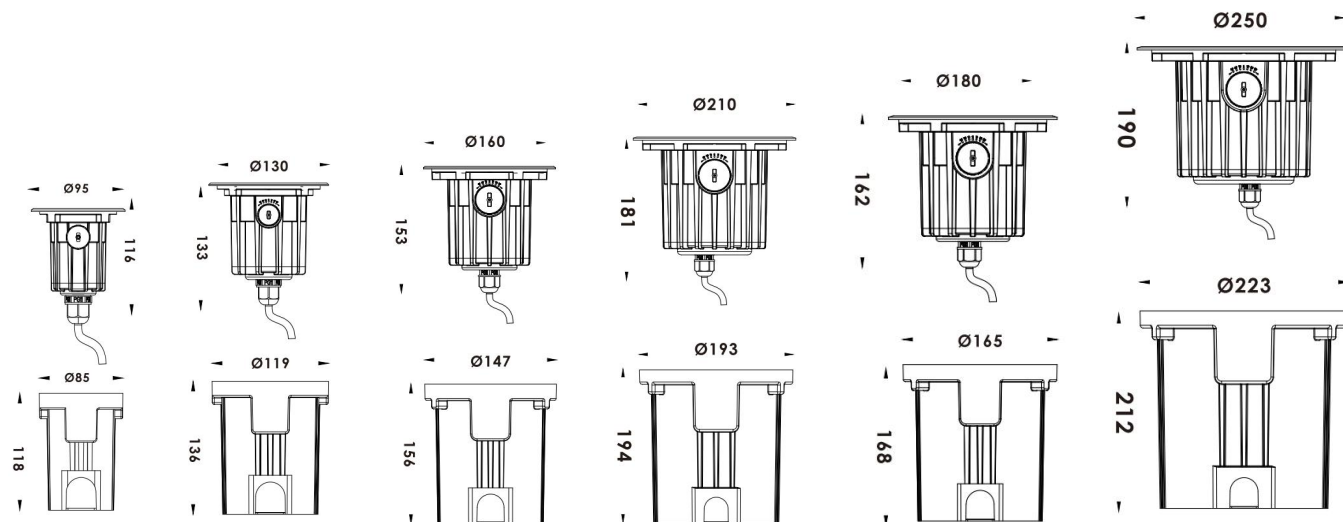

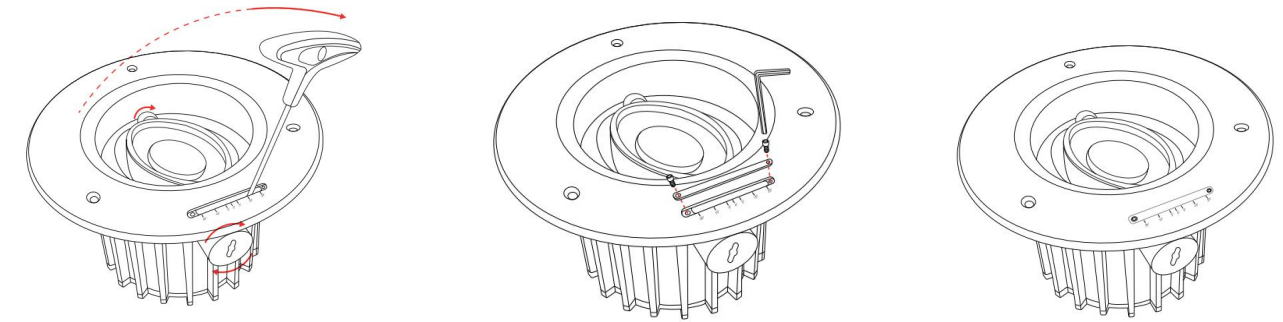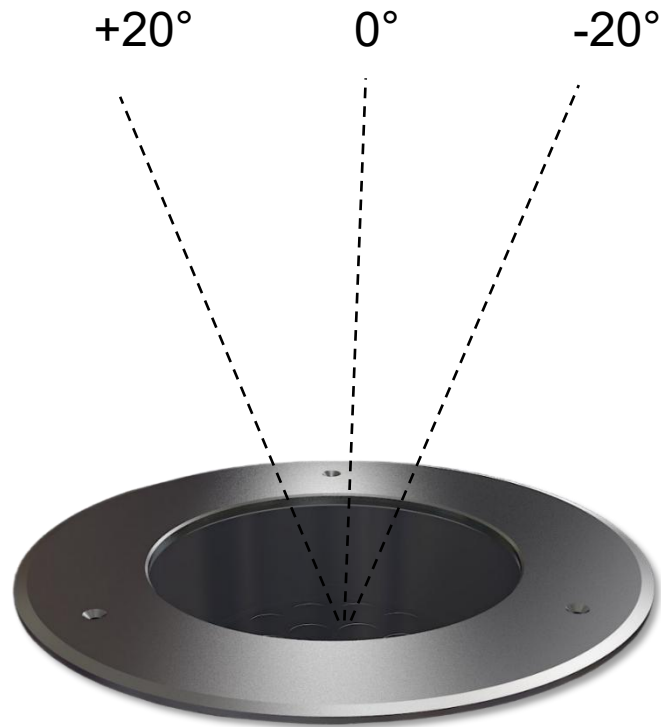


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2AAB-CS1	1*2W 1*3W 1*4W	OSRAM/CREE OSRAM OSRAM	12/24VDC 120-240VAC 12/24VDC 12/24VDC	5°/8°/15°/25°/40°/60°/10°45°/20°*65° 12°/25°/40°/60° 12°/25°/40°/60°	157lm 60lm 80lm	Single RGB 3in1 RGBW 4in1	08	67
AL-2AAB-CS2	2*3W 3*2W 2*3W 2*4W	CREE CREE/OSRAM OSRAM OSRAM	12/24VDC 120-240VAC 12/24VDC 120-240VAC 12/24VDC 12/24VDC	3°/8° 15°/25°/40°/60°/10°45°/20°*65° 18°/24°/38°/60° 18°/24°/38°/60°	465lm 465lm 135lm 182lm	Single Single RGB 3in1 RGBW 4in1	08	67
AL-2AAB-CS3	4*3W 6*2W 4*2.5W 4*3.5W	CREE CREE/OSRAM OSRAM OSRAM	12/24VDC 120-240VAC 12/24VDC 120-240VAC 12/24VDC 12/24VDC	3°/8° 15°/25°/40°/60°/10°45°/20°*65° 18°/24°/38°/60° 18°/24°/38°/60°	920lm 920lm 250lm 430lm	Single Single RGB 3in1 RGBW 4in1	08	67
AL-2AAB-CS4	6*3W 9*2W 6*2.5W 6*3.5W	CREE CREE/OSRAM OSRAM OSRAM	12/24VDC 120-240VAC 12/24VDC 120-240VAC 12/24VDC 12/24VDC	3°/8° 15°/25°/40°/60°/10°45°/20°*65° 18°/24°/38°/60° 18°/24°/38°/60°	1310lm 1310lm 425lm 568lm	Single Single RGB 3in1 RGBW 4in1	10	67
AL-2AAB-CS5	9*3W 12*2W 9*2.5W 9*3.5W	CREE CREE/OSRAM OSRAM OSRAM	12/24VDC 120-240VAC 12/24VDC 120-240VAC 12/24VDC 12/24VDC	3°/8° 15°/25°/40°/60°/10°45°/20°*65° 18°/24°/38°/60° 18°/24°/38°/60°	1800lm 1800lm 730lm 978lm	Single Single RGB 3in1 RGBW 4in1	10	67
AL-2AAB-CS6	9*3W 18*2W 12*2.5W 12*3.5W	CREE CREE/OSRAM OSRAM OSRAM	12/24VDC 120-240VAC 12/24VDC 120-240VAC 12/24VDC 12/24VDC	3°/8° 15°/25°/40°/60°/10°45°/20°*65° 18°/24°/38°/60° 18°/24°/38°/60°	2800lm 2800lm 825lm 1100lm	Single Single RGB 3in1 RGBW 4in1	10	67

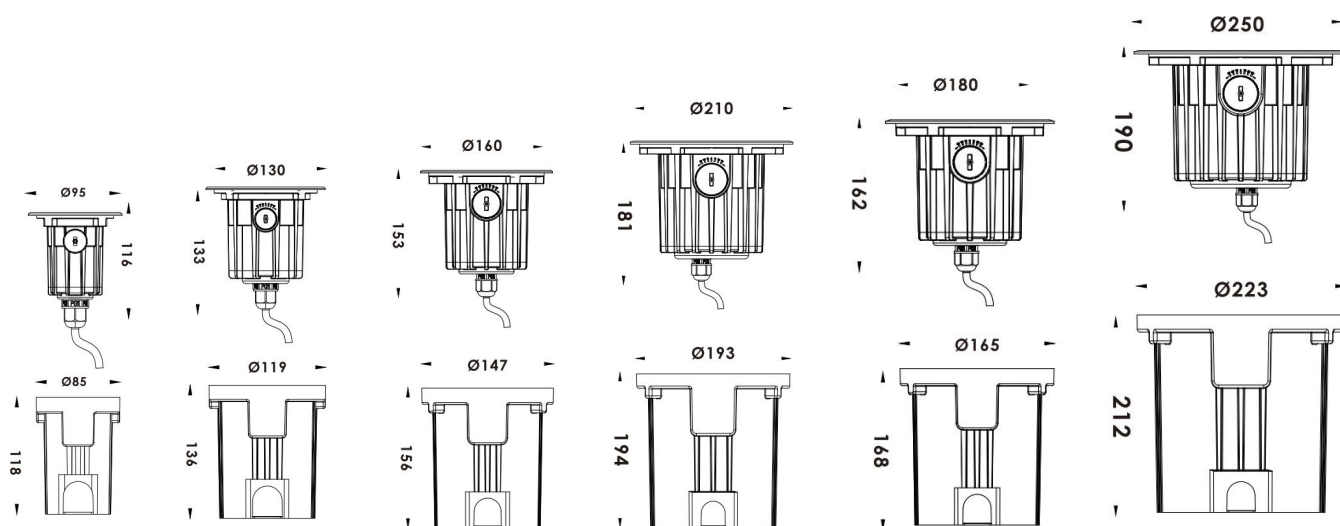

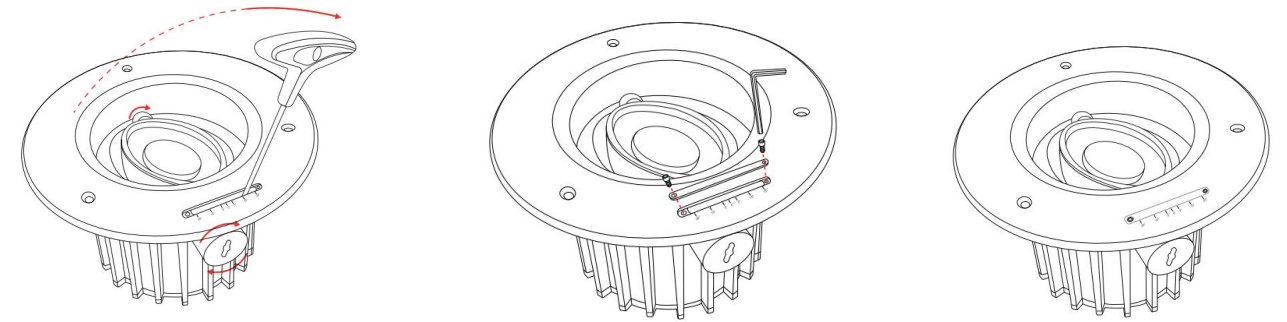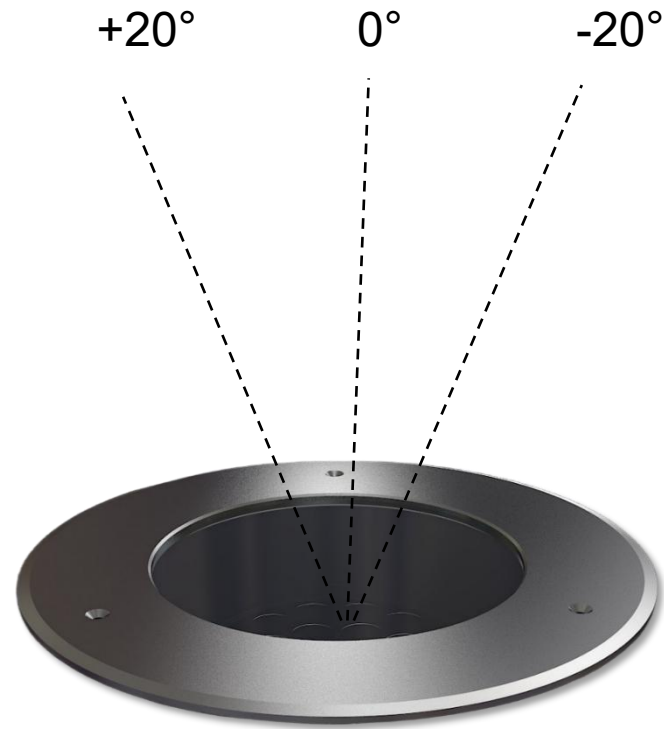



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2AAR-CS2	1*6W	CREE COB	12/24VDC 120-240VAC	18°/24°/38°/60°	465lm	Single	08	67
AL-2AAR-CS3	1*12W	CREE COB	12/24VDC 120-240VAC	18°/24°/38°/60°	1120lm	Single	08	67
AL-2AAR-CS4	1*20W	CREE COB	12/24VDC 120-240VAC	18°/24°/38°/60°	1438lm	Single	10	67
AL-2AAR-CS5	1*25W	CREE COB	12/24VDC 120-240VAC	18°/24°/38°/60°	2130lm	Single	10	67
AL-2AAR-CS6	1*36W	CREE COB	12/24VDC 120-240VAC	18°/24°/38°/60°	2986lm	Single	10	67

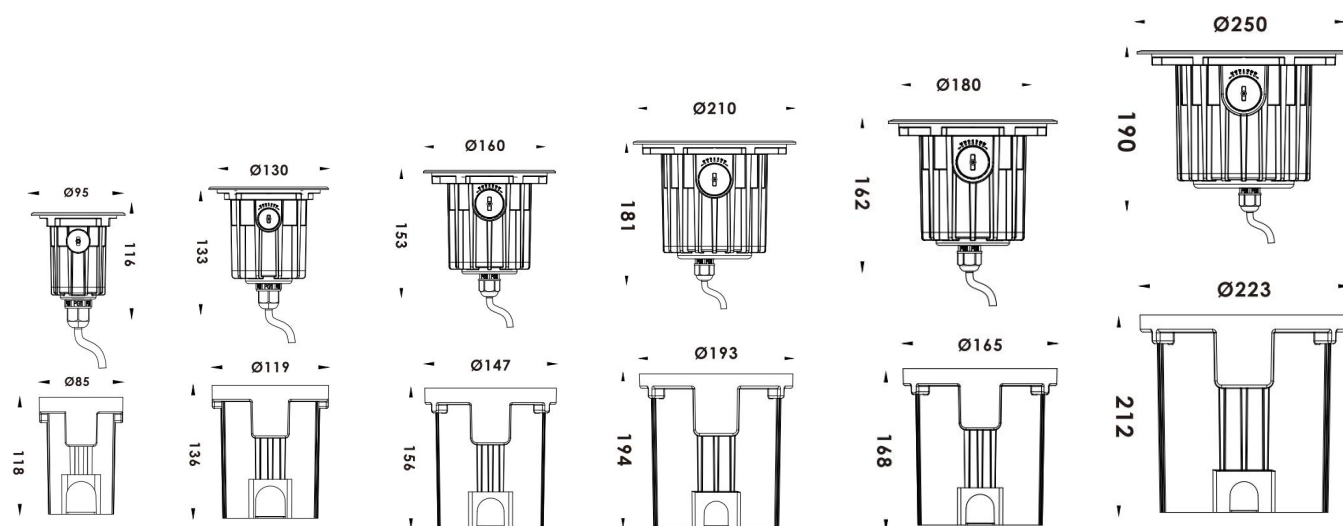




Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2AGB-S1	1*2W	OSRAM/CREE	12/24VDC 120-240VAC	5°/8°/15°/25°/40°/60°/10°*45°/20°*65° 12°/25°/40°/60° 12°/25°/40°/60°	157lm	Single RGB 3in1 RGBW 4in1	08	67
	1*3W	OSRAM	12/24VDC		60lm			
	1*4W	OSRAM	12/24VDC		80lm			
AL-2AGB-S2	2*3W	CREE	12/24VDC 120-240VAC	15°/25°/40°/60°/10°*45°/20°*65° 18°/24°/38°/60° 18°/24°/38°/60°	465lm	Single Single RGB 3in1 RGBW 4in1	08	67
	3*2W	CREE/OSRAM	12/24VDC 120-240VAC		465lm			
	2*3W	OSRAM	12/24VDC		135lm			
	2*4W	OSRAM	12/24VDC		182lm			
AL-2AGB-S3	4*3W	CREE	12/24VDC 120-240VAC	15°/25°/40°/60°/10°*45°/20°*65° 18°/24°/38°/60° 18°/24°/38°/60°	920lm	Single Single RGB 3in1 RGBW 4in1	08	67
	6*2W	CREE/OSRAM	12/24VDC 120-240VAC		920lm			
	4*2.5W	OSRAM	12/24VDC		250lm			
	4*3.5W	OSRAM	12/24VDC		430lm			
AL-2AGB-S4	6*3W	CREE	12/24VDC 120-240VAC	15°/25°/40°/60°/10°*45°/20°*65° 18°/24°/38°/60° 18°/24°/38°/60°	1310lm	Single Single RGB 3in1 RGBW 4in1	10	67
	9*2W	CREE/OSRAM	12/24VDC 120-240VAC		1310lm			
	6*2.5W	OSRAM	12/24VDC		425lm			
	6*3.5W	OSRAM	12/24VDC		568lm			
AL-2AGB-S5	9*3W	CREE	12/24VDC 120-240VAC	15°/25°/40°/60°/10°*45°/20°*65° 18°/24°/38°/60° 18°/24°/38°/60°	1800lm	Single Single RGB 3in1 RGBW 4in1	10	67
	12*2W	CREE/OSRAM	12/24VDC 120-240VAC		1800lm			
	9*2.5W	OSRAM	12/24VDC		730lm			
AL-2AGB-S6	9*3W	CREE	12/24VDC 120-240VAC	15°/25°/40°/60°/10°*45°/20°*65° 18°/24°/38°/60° 18°/24°/38°/60°	2800lm	Single Single RGB 3in1 RGBW 4in1	10	67
	18*2W	CREE/OSRAM	12/24VDC 120-240VAC		2800lm			
	12*2.5W	OSRAM	12/24VDC		1100lm			

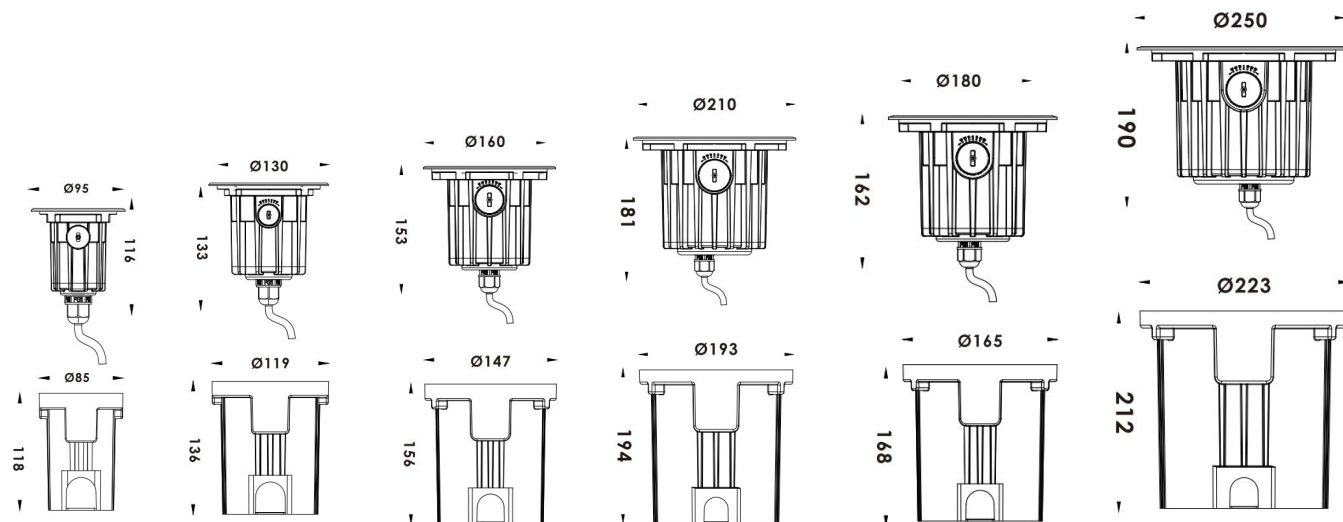


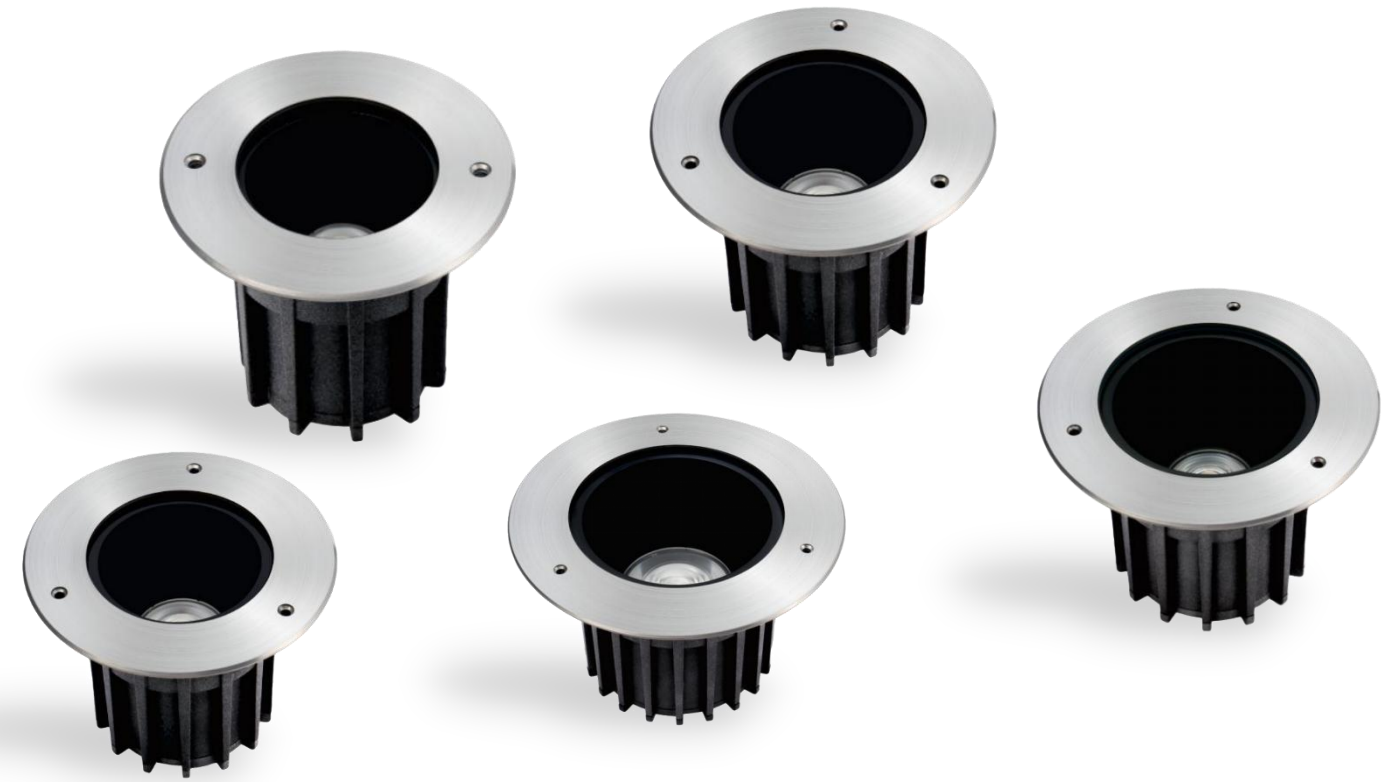

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2AGR-S2	1*6W	CREE COB	12/24VDC 120-240VAC	18°/24°/38°/60°	465lm	Single	08	67
AL-2AGR-S3	1*12W	CREE COB	12/24VDC 120-240VAC	18°/24°/38°/60°	1120lm	Single	08	67
AL-2AGR-S4	1*20W	CREE COB	12/24VDC 120-240VAC	18°/24°/38°/60°	1438lm	Single	10	67
AL-2AGR-S5	1*25W	CREE COB	12/24VDC 120-240VAC	18°/24°/38°/60°	2130lm	Single	10	67
AL-2AGR-S6	1*36W	CREE COB	12/24VDC 120-240VAC	18°/24°/38°/60°	2986lm	Single	10	67


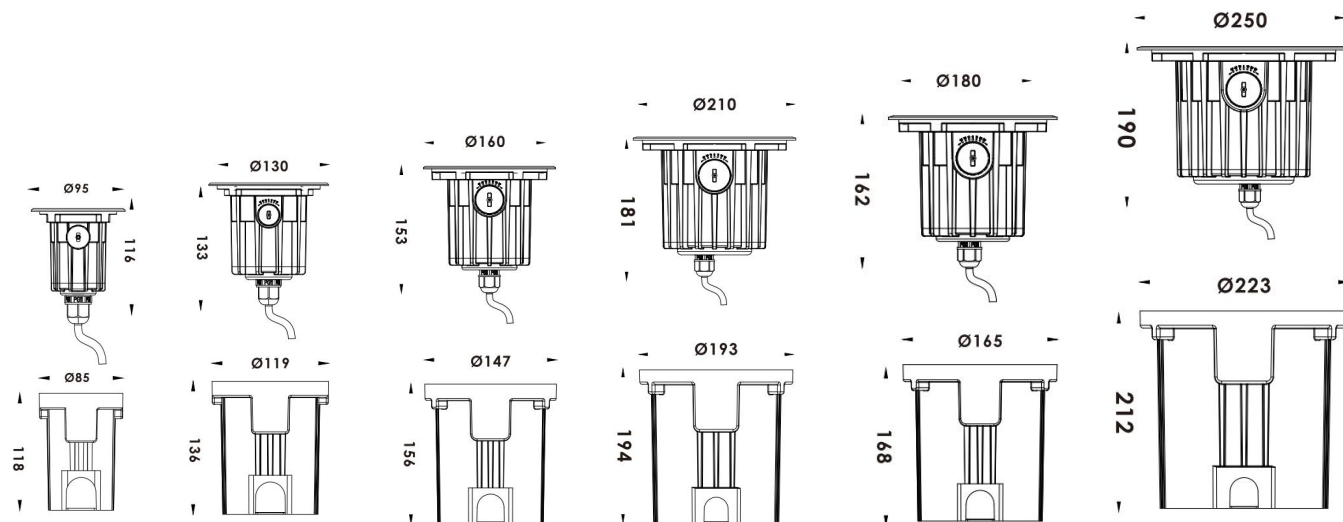



## AL-2APR Polarized LED In-ground Light

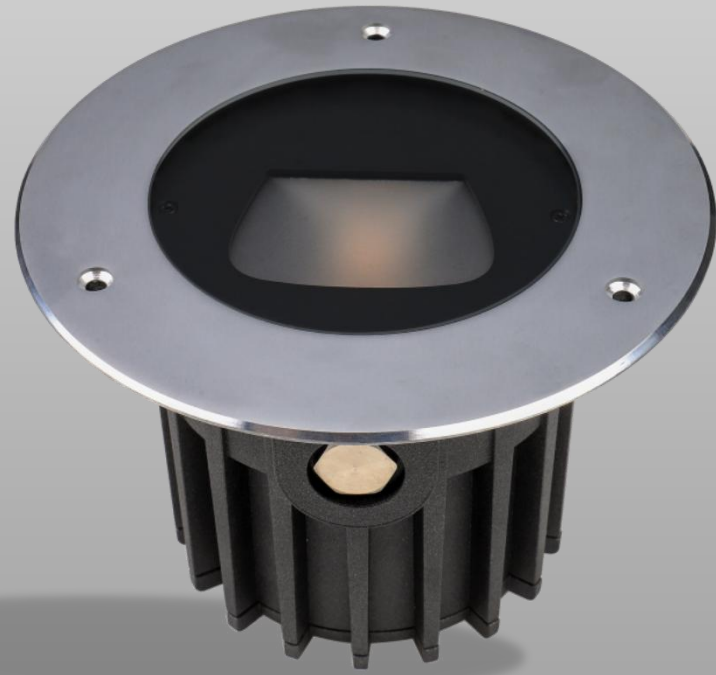


### Product Description


- Triac, 0-10V, PMW, DALI dimmable.
- IP67 for outdoor lighting.
- CREE COB LED high lumen output.
- Six size with power from 3W to 40W optional.
- Body in die-casting aluminum housing with powder coating suitable for coastal applications.
- Surface cover in SUS316L stainless steel with Titanium plating.
- Polarized optical lens.
- 5 years warranty.
- CE, ROHS, UKCA certified.

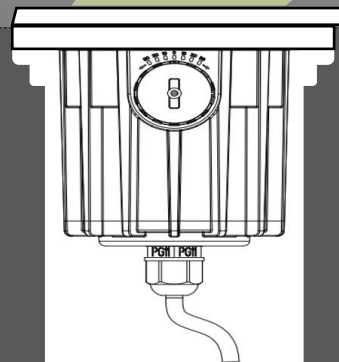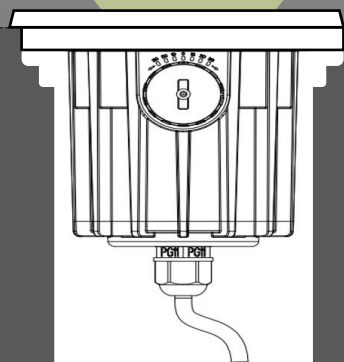

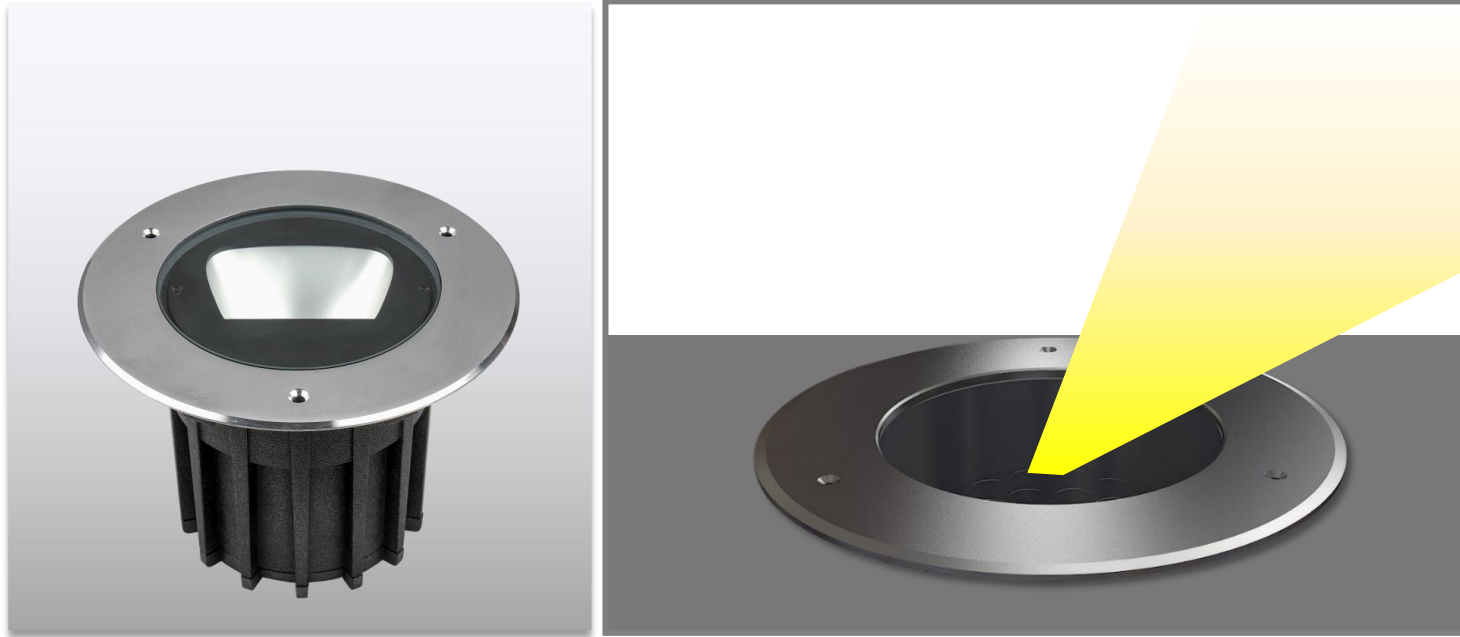


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2APR-S2	1*3W	CREE	12/24VDC120-240VAC	Asymmetrical 27°	250lm	Single	08	67
AL-2APR-S2	1*6W	CREE COB	12/24VDC 120-240VAC	Asymmetrical 27°	450lm	Single	08	67
AL-2APR-S3	1*12W	CREE COB	12/24VDC 120-240VAC	Asymmetrical 27°	980lm	Single	08	67
AL-2APR-S4	1*20W	CREE COB	12/24VDC 120-240VAC	Asymmetrical 27°	1100lm	Single	10	67
AL-2APR-S5	1*25W	CREE COB	12/24VDC 120-240VAC	Asymmetrical 27°	1900lm	Single	10	67
AL-2APR-S6	1*36W	CREE COB	12/24VDC 120-240VAC	Asymmetrical 27°	2600lm	Single	10	67

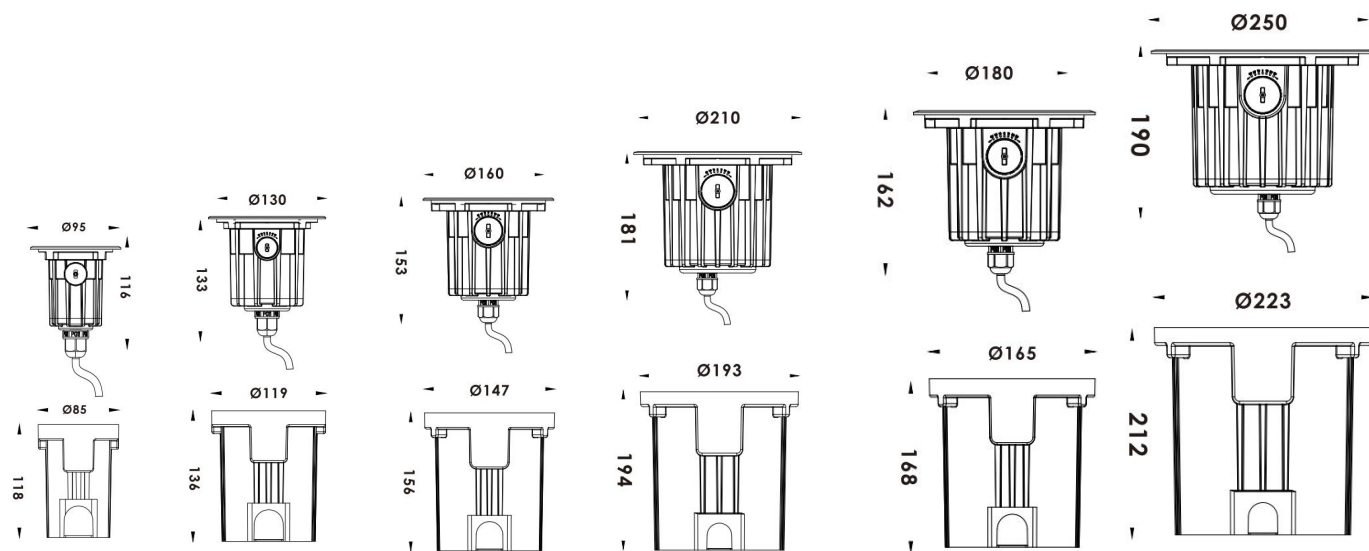

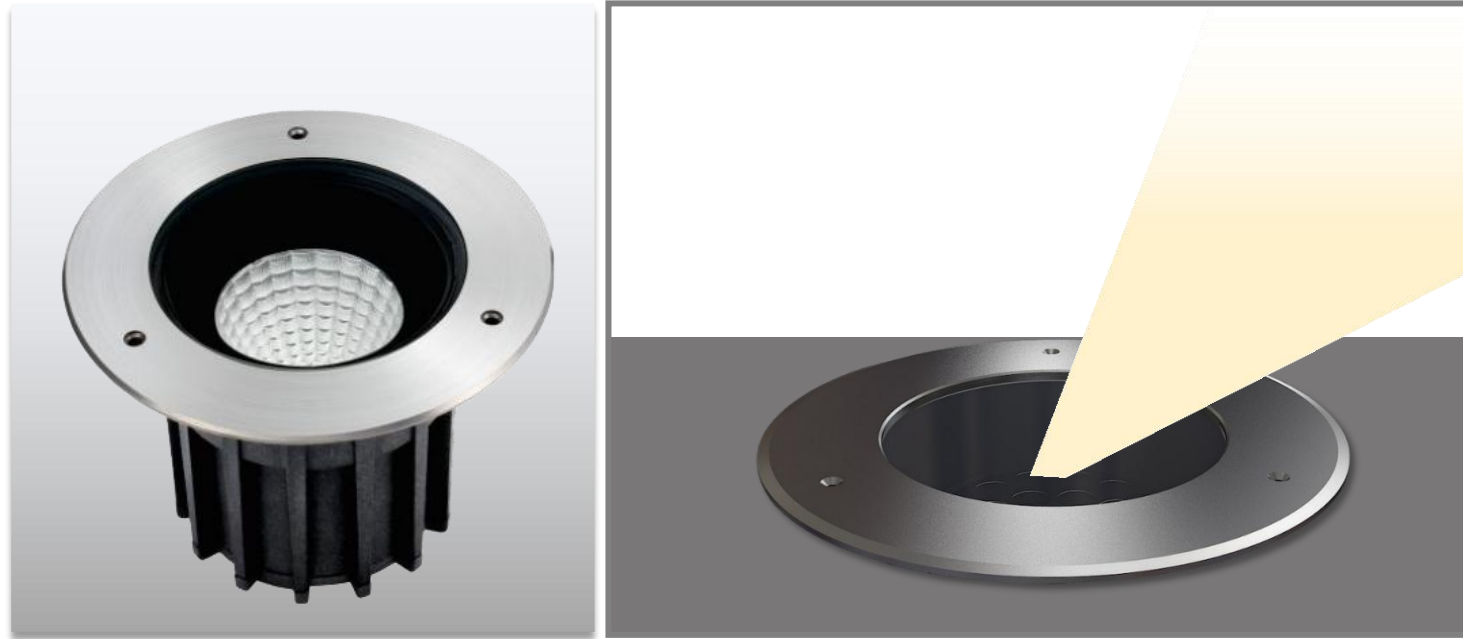

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2ARF-S2	1*3W	CREE	12/24VDC 120-240VAC	20°/30°/40°	250lm	Single	08	67
AL-2ARF-S2	1*6W	CREE COB	12/24VDC 120-240VAC	20°/30°/40°	450lm	Single	08	67
AL-2ARF-S3	1*12W	CREE COB	12/24VDC 120-240VAC	20°/30°/40°	980lm	Single	08	67
AL-2ARF-S4	1*20W	CREE COB	12/24VDC 120-240VAC	20°/30°/40°	1100lm	Single	10	67
AL-2ARF-S5	1*25W	CREE COB	12/24VDC 120-240VAC	20°/30°/40°	1900lm	Single	10	67
AL-2ARF-S6	1*36W	CREE COB	12/24VDC 120-240VAC	20°/30°/40°	2600lm	Single	10	67

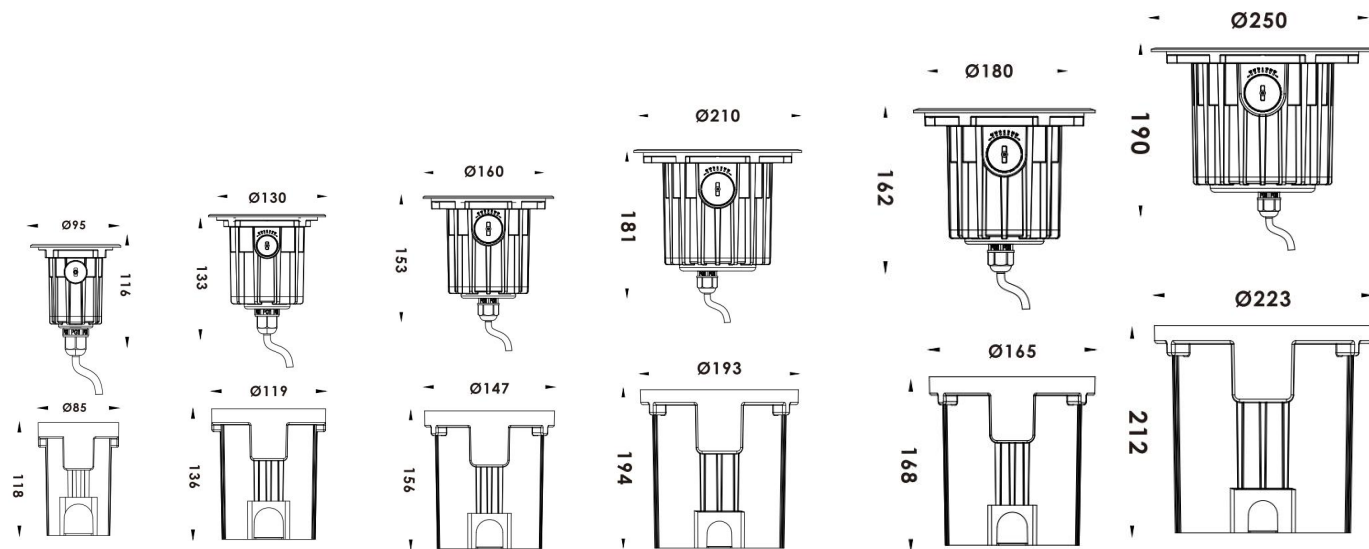

## AL-2H High-power LED In-ground Light



### Product Description

- IP67 for outdoor lighting.
- Optical lens are available in three versions: narrow, wide and asymmetric.
- RGBW 4in1 DMX512, Triac, PWM, 0-10V, DALI dimmable.
- Surface cover in 316L stainless steel surface.
- Body in die-casting aluminum, durable and robust.
- Over 2000kg loading capacity.
- IK08 and IK10 for protection against high impact.
- Various light source optional: COB LED, high-power LED, SMD LED.
- Optical accessories optional: filter, anti-glare mesh, honeycomb glass.
- 5 years warranty.
- CE, ROHS, UKCA certified.




# AL-2S Compact Size Inground Light



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2SA	1*0.3W	OSRAM	12VDC	120°	11lm	Single	05	67




Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2SB	1*0.5W	OSRAM	12VDC	120°	55lm	Single	05	67

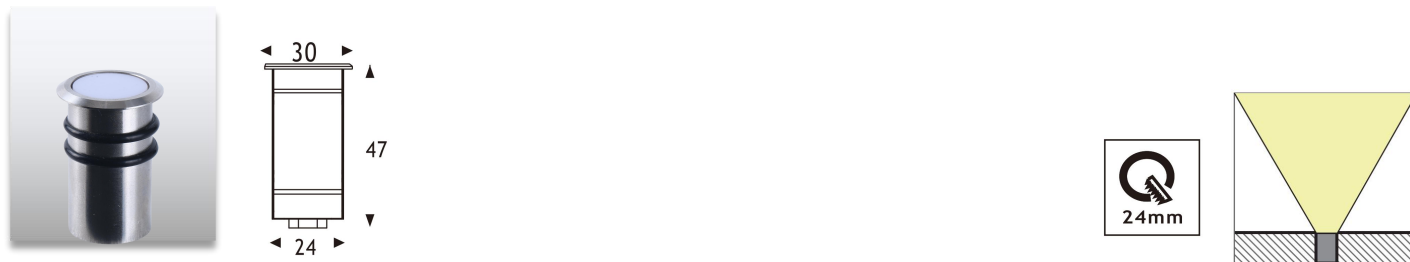


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-3K-2SC	1*1W	OSRAM	12VDC	30°/60°/120°	66lm	Single	05	67


# AL-2Y Compact Size Inground Light

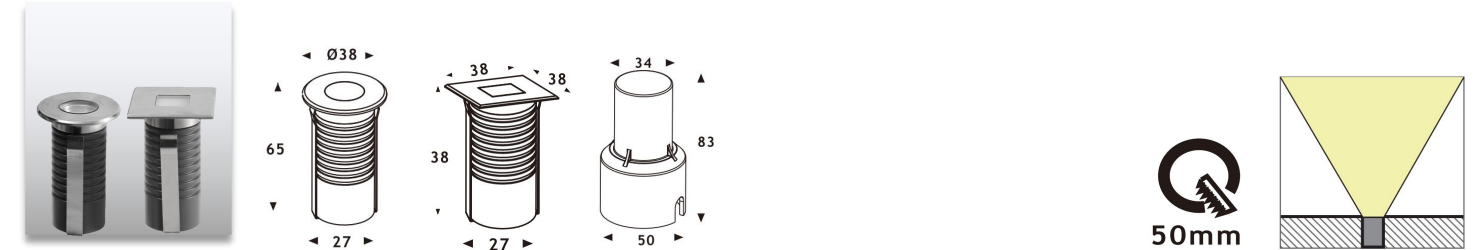

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2YA	1*1.5W	OSRAM	12/24VDC 120-240VAC	120°/25°/40°/60°	110lm	Single	05	67

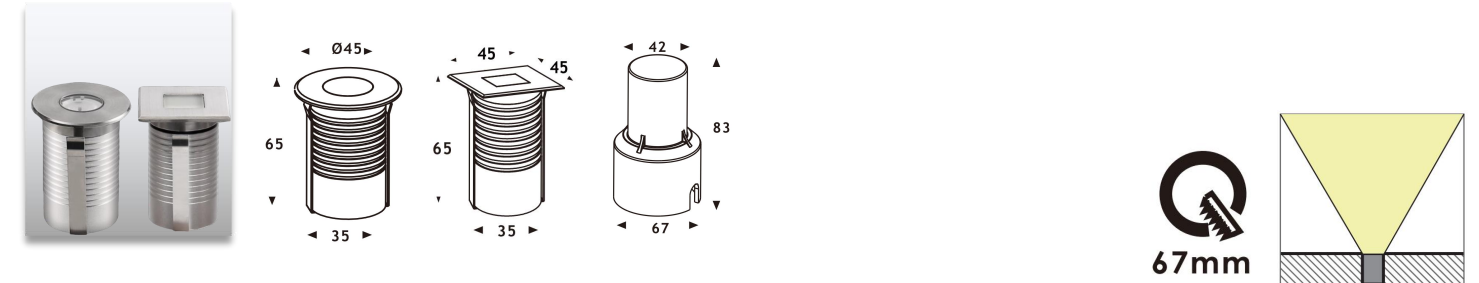


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2YB	1*2W 1*3W	OSRAM	12/24VDC 120-240VAC 12/24VDC	120°/25°/40°/60° 25°/40°/60°	130lm	Single RGB 3in1	05	67

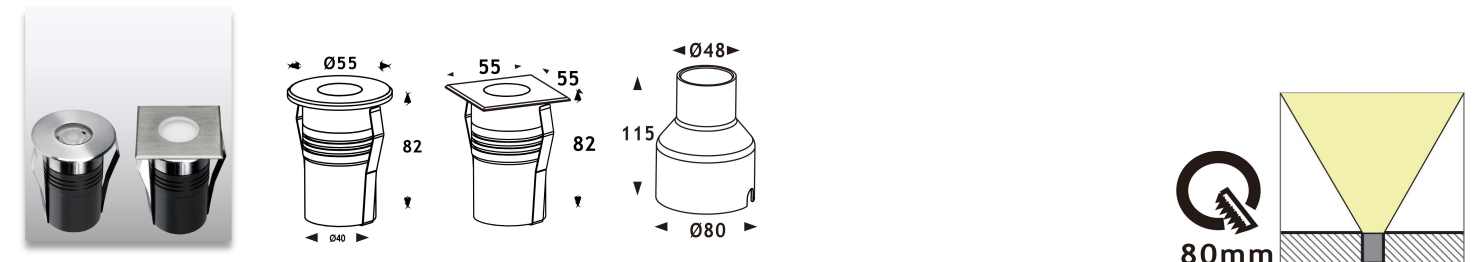


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2W	1*2W 1*3W 1*4W	CREE/OSRAM OSRAM OSRAM	12/24VDC 120-240VAC 12/24VDC 12/24VDC	120°/25°/40°/60° 25°/40°/60° 25°/40°/60°	170lm	Single	04	67


# AL-2H High Power LED Inground Light

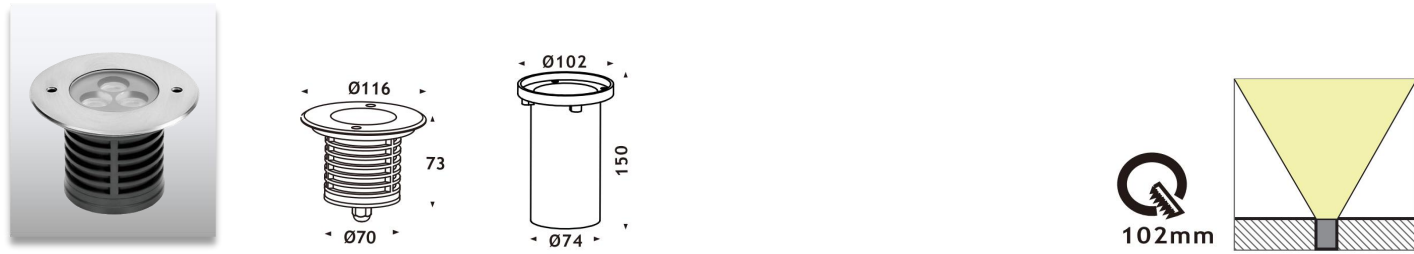

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2CD-R	3*2W	CREE/OSRAM	12/24VDC 120-240VAC	5°/20°/25°/40°/60°/10*45°/10*45°	530lm	Single	08	67
	3*2.5W	OSRAM	12/24VDC	12°/25°/40°/60°/12*45°	310lm	RGB 3in1		
	3*3.5W	OSRAM	12/24VDC	12°/25°/40°/60°/12*45°	310lm	RGBW 4in1		

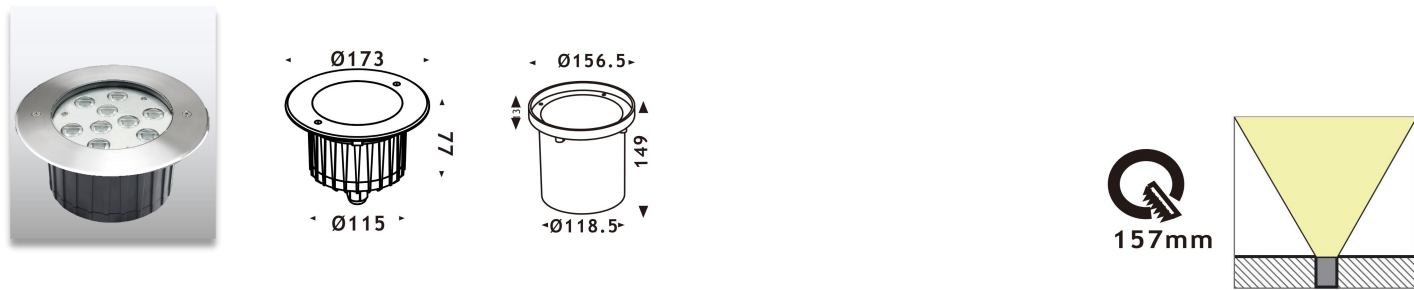


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2BE-R	6*2W	CREE/OSRAM	12/24VDC 120-240VAC	10°/25°/30°/45°/60°	1080lm	Single	08	67
	6*2.5W	OSRAM	12/24VDC	12°/25°/30°/45°/60°	620lm	RGB 3in1		
	9*1.5W	CREE/OSRAM	12/24VDC 120-240VAC	25°/40°/60°/80°/10*45°/25*45	1440lm	Single		
	9*1.5W	OSRAM	12/24VDC	25°/40°/60°/80°/10*45°/25*45	1440lm	RGB		
	9*2.5W	OSRAM	12/24VDC	25°/40°/60°/80°/10*45°/25*45	690lm	RGB 3in1		

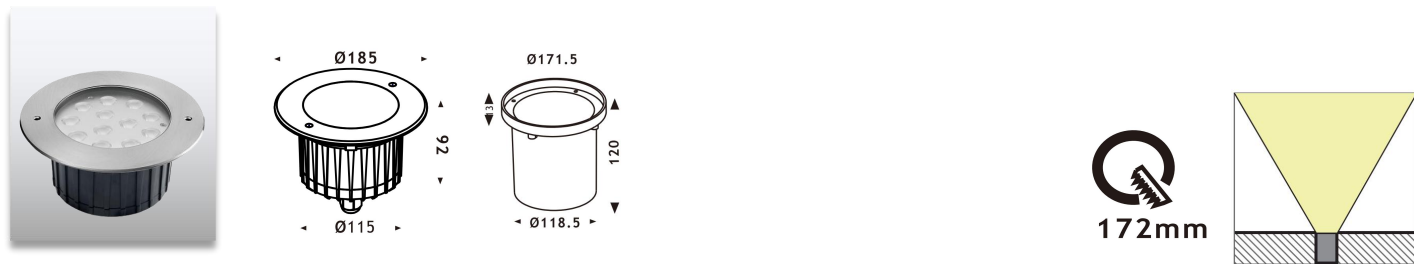


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2BF	12*2W	CREE/OSRAM	12/24VDC 120-240VAC	10°/25°/40°/60°/10*45°/25*45°	530lm	Single	08	67
	18*1.5W	OSRAM	12/24VDC	12°/25°/30°/45°/60°	530lm	RGB 3in1		
	12*2.5W	CREE/OSRAM	12/24VDC 120-240VAC	12°/25°/40°/60°/12*45	210lm	Single		
	12*3.5W	OSRAM	12/24VDC	12°/25°/40°/60°/12*45	1680lm	RGB		
	18*1.5W	OSRAM	12/24VDC	25°/40°/60°/80°/10*45°/25*45	2100lm	RGB		
	18*1.5W	OSRAM	12/24VDC	25°/40°/60°/80°/10*45°/25*45	1500lm	RGB 3in1		

# AL-2H High Power LED Inground Light


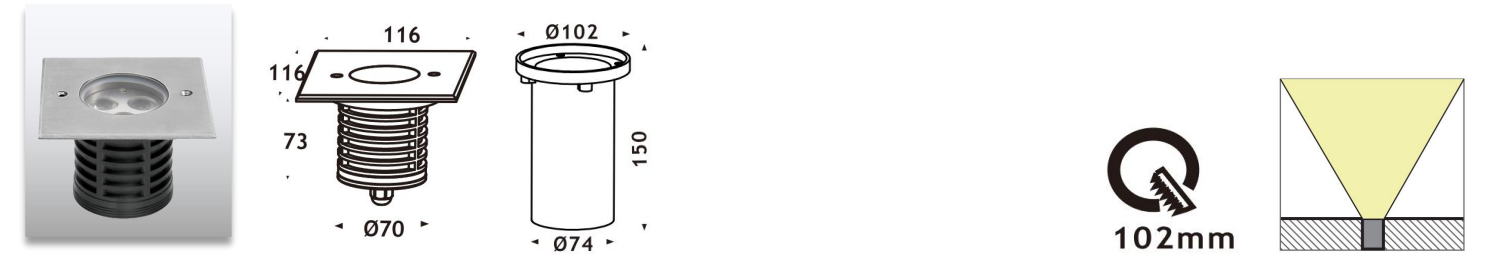


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2CD-S	3*2W	CREE/OSRAM	12/24VDC 120-240VAC	5°/20°/25°/40°/60°/10*45°/10*45°	530lm	Single	08	67
	3*2.5W	OSRAM	12/24VDC	12°/25°/40°/60°/12*45°	310lm	RGB 3in1		
	3*3.5W	OSRAM	12/24VDC	12°/25°/40°/60°/12*45°	310lm	RGBW 4in1		


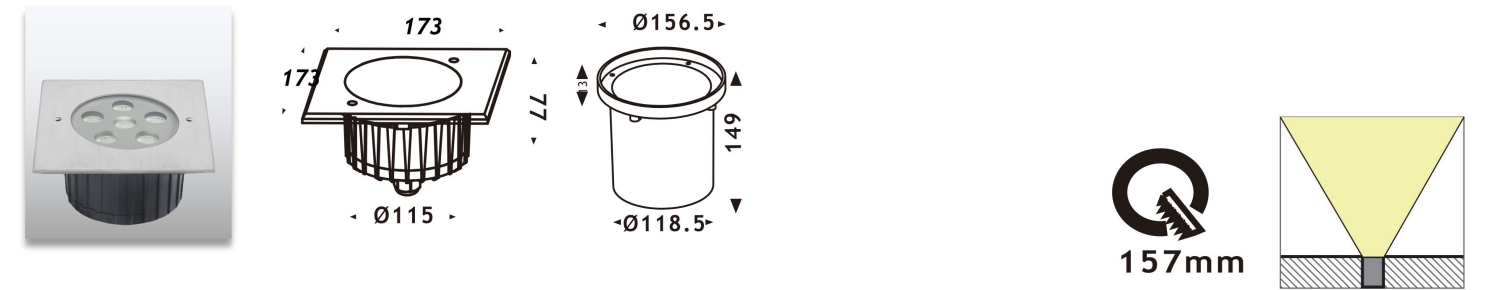


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2BE-S	6*2W	CREE/OSRAM	12/24VDC 120-240VAC	10°/25°/30°/45°/60°	1080lm	Single	08	67
	6*2.5W	OSRAM	12/24VDC	12°/25°/30°/45°/60°	620lm	RGB 3in1		
	9*1.5W	CREE/OSRAM	12/24VDC 120-240VAC	25°/40°/60°/80°/10*45°/25*45	1440lm	Single		
	9*1.5W	OSRAM	12/24VDC	25°/40°/60°/80°/10*45°/25*45	1440lm	RGB		
	9*2.5W	OSRAM	12/24VDC	25°/40°/60°/80°/10*45°/25*45	690lm	RGB 3in1		

# AL-2V LED Inground Light


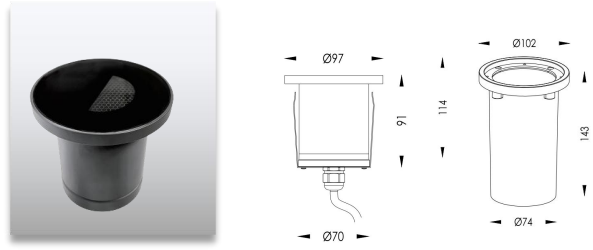


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2V-H	1*6W 3*2W	CREE/OSRAM CREE/OSRAM	12/24VDC 120-240VAC 12/24VDC 120-240VAC	120° 15°/24°/36°/60°	510lm 390lm	Single Single	08	67

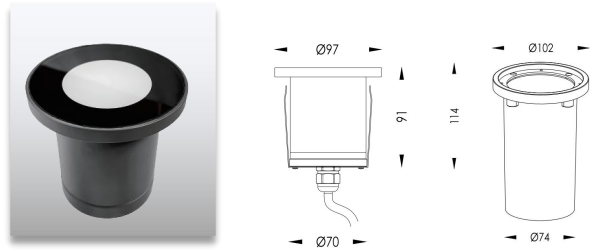


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2V-C	1*6W 3*2W	CREE/OSRAM CREE/OSRAM	12/24VDC 120-240VAC 12/24VDC 120-240VAC	120° 15°/24°/36°/60°	510lm 390lm	Single Single	08	67

# AL-2W LED Inground Light

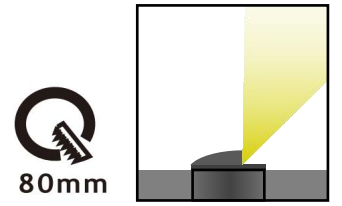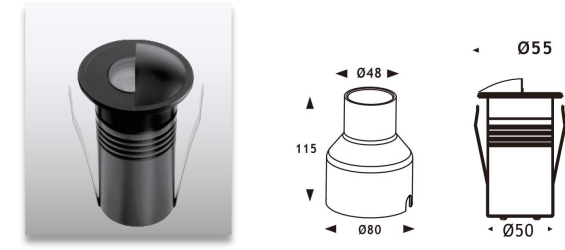

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2W-D55	1*2W 1*3W 1*4W	CREE/OSRAM OSRAM OSRAM	12/24VDC 120-240VAC 12/24VDC 12/24VDC	12°/25°/40°/60°	120lm 50lm 50lm	Single RGB 3in1 RGBW 4in1	08	67

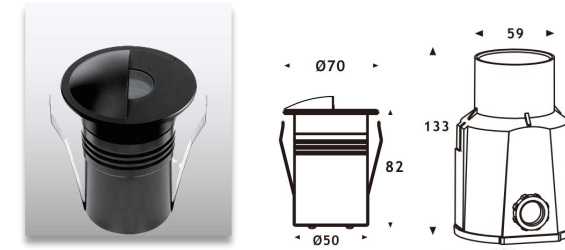

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2W-D70	1*6W 1*3W 1*4W	CREE/OSRAM OSRAM OSRAM	12/24VDC 120-240VAC 12/24VDC 12/24VDC	8°/12°/25°/40°/60°/10°45°/25°45° 12°/25°/40°/60°/10°45°/25°45° 12°/25°/40°/60°/10°45°/25°45°	360lm 120lm 170lm	Single RGB 3in1 RGBW 4in1	08	67

# AL-2R COB LED Inground Light



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-R2W-R	1*9W	OSRAM/CREE	12/24VDC 120-240VAC	15°/24°/36°/60°	904lm	Single	09	67
	1*9W	OSRAM	12/24VDC	8°/15°/25°/40°/60°	241lm	RGB 3in1		
	1*10W	OSRAM	12/24VDC	8°/15°/25°/40°/60°	281lm	RGBW 4in1		


# AL-2R COB LED Inground Light



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-R2W-S	1*9W	CREE COB	12/24VDC 120-240VAC	15°/24°/36°/60°	904lm	Single	09	67
	1*9W	OSRAM	12/24VDC	8°/15°/25°/40°/60°	241lm	RGB 3in1		
	1*10W	OSRAM	12/24VDC	8°/15°/25°/40°/60°	281lm	RGBW 4in1		




Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-R2CD	1*6W	CREE COB	12/24VDC 120-240VAC	15°/24°/38°/60°	530lm	Single	09	67

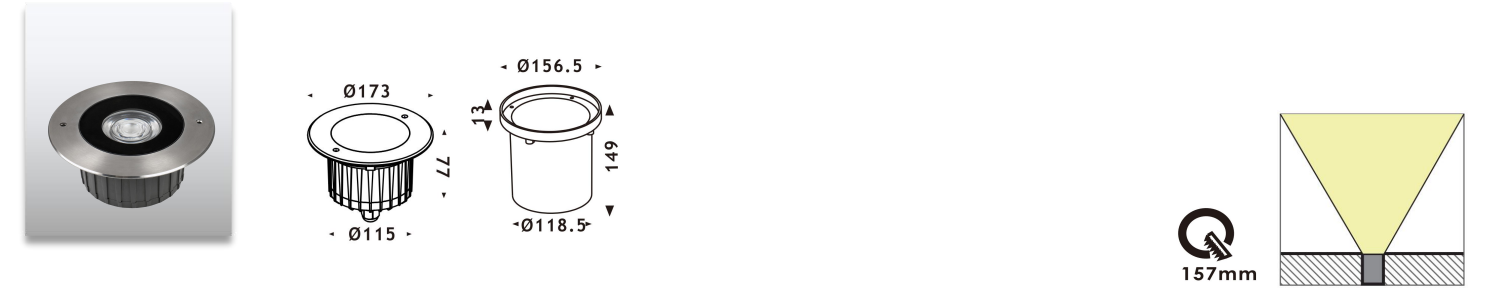

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-R2BE	1*13W	CREE COB	12VDC	15°/24°/38°/60°	1492lm	Single	09	67




Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-R2CDL	1*13W	CREE COB	12/24VDC 120-240VAC	15°/24°/38°/60°	1352lm	Single	09	67

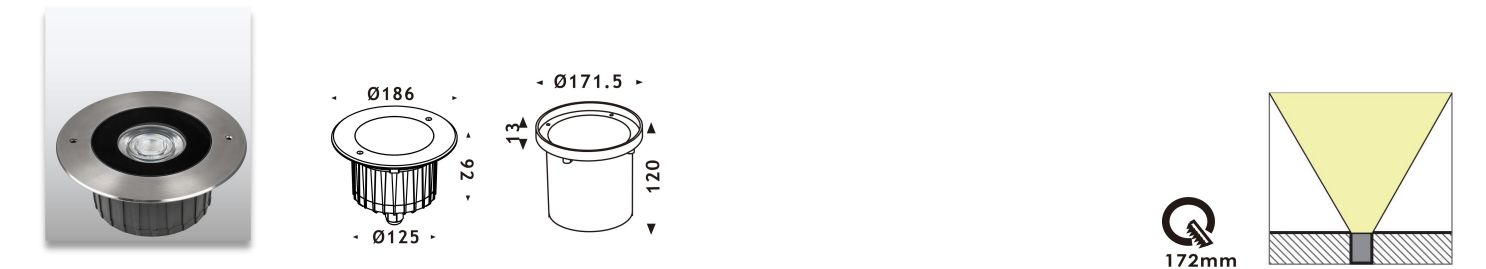

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-R2BF	1*25W	CREE COB	12VDC	15°/24°/38°/60°	2520lm	Single	09	67


## AL-2X Ultra-slim In-ground Light

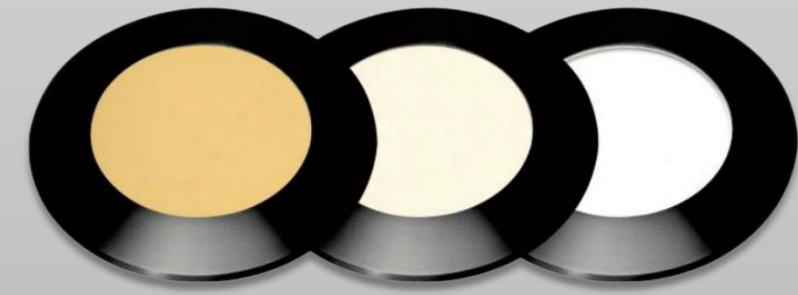


## Product Description

- Slim in-ground light, perfect for deck lighting.
- IP67 for outdoor lighting applications.
- Various size optional.
- RGBW 4in1 DMX512, Triac, PWM, 0-10V, DALI dimmable.
- Surface cover in 316L stainless steel, suitable for coastal applications.
- Body in die-casting aluminum, durable and robust.
- Various light source optional: COB LED, high-power LED, SMD LED.
- 5 years warranty.
- CE, ROHS, UKCA certified.



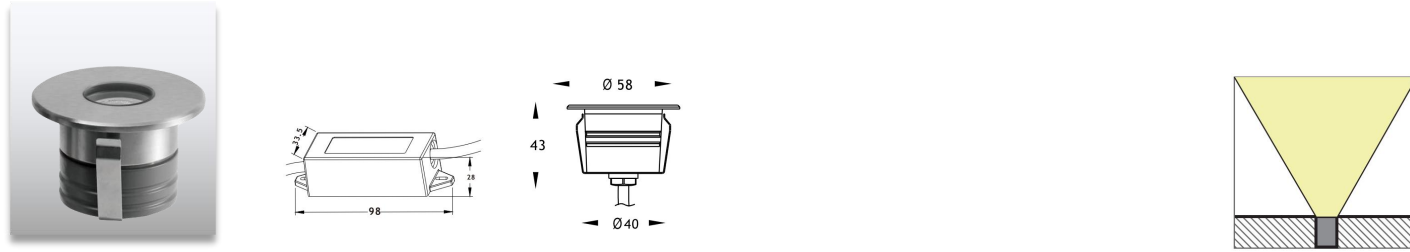

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2XA-R	1*1.5W	OSRAM/CREE	12/24VDC 120-240VAC	10°/15°/25°/40°/60°	110lm	Single	09	67
	1*2W	OSRAM	12/24VDC	10°/15°/25°/40°/60°	70lm	RGB 3in1		

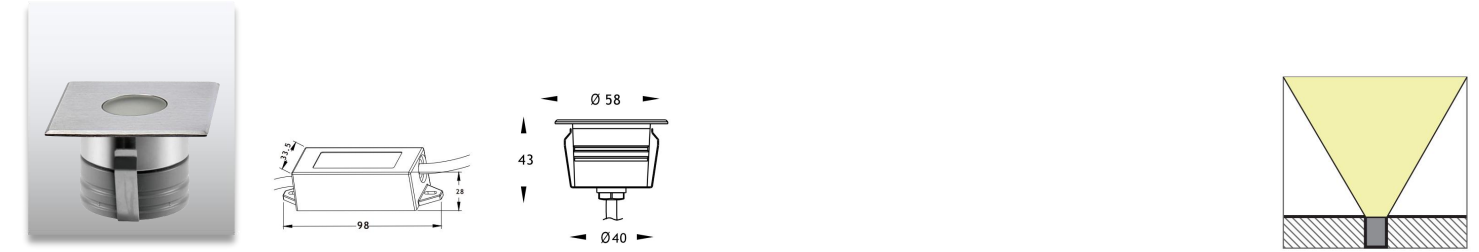

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2XA-S	1*1.5W	OSRAM/CREE	12/24VDC 120-240VAC	10°/15°/25°/40°/60°	110lm	Single	09	67
	1*2W	OSRAM	12/24VDC	10°/15°/25°/40°/60°	70lm	RGB 3in1		



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2XB-R	3*2W	OSRAM/CREE	12/24VDC 120-240VAC	5°/10°/25°/40°/60°	520lm	Single	09	67
	3*2.5W	OSRAM	12/24VDC	10°/25°/40°/60°	210lm	RGB 3in1		





Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2XB-S	3*2W	OSRAM/CREE	12/24VDC 120-240VAC	5°/10°/25°/40°/60°	520lm	Single	09	67
	3*2.5W	OSRAM	12/24VDC	10°/25°/40°/60°	210lm	RGB 3in1		



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2XC-R	6*2W	OSRAM/CREE	12/24VDC 120-240VAC	5°/10°/25°/40°/60°	630lm	Single	09	67
	6*2.5W	OSRAM	12/24VDC	10°/25°/40°/60°	420lm	RGB 3in1		
	6*3.5W	OSRAM	12/24VDC	10°/25°/40°/60°	450lm	RGBW 4in1		





Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2XC-S	6*2W	OSRAM/CREE	12/24VDC 120-240VAC	5°/10°/25°/40°/60°	630lm	Single	09	67
	6*2.5W	OSRAM	12/24VDC	10°/25°/40°/60°	420lm	RGB 3in1		
	6*3.5W	OSRAM	12/24VDC	10°/25°/40°/60°	450lm	RGBW 4in1		

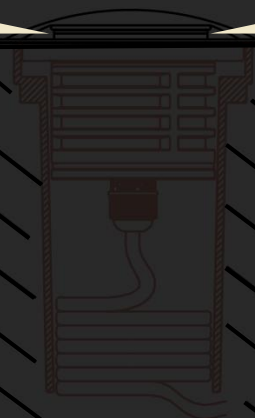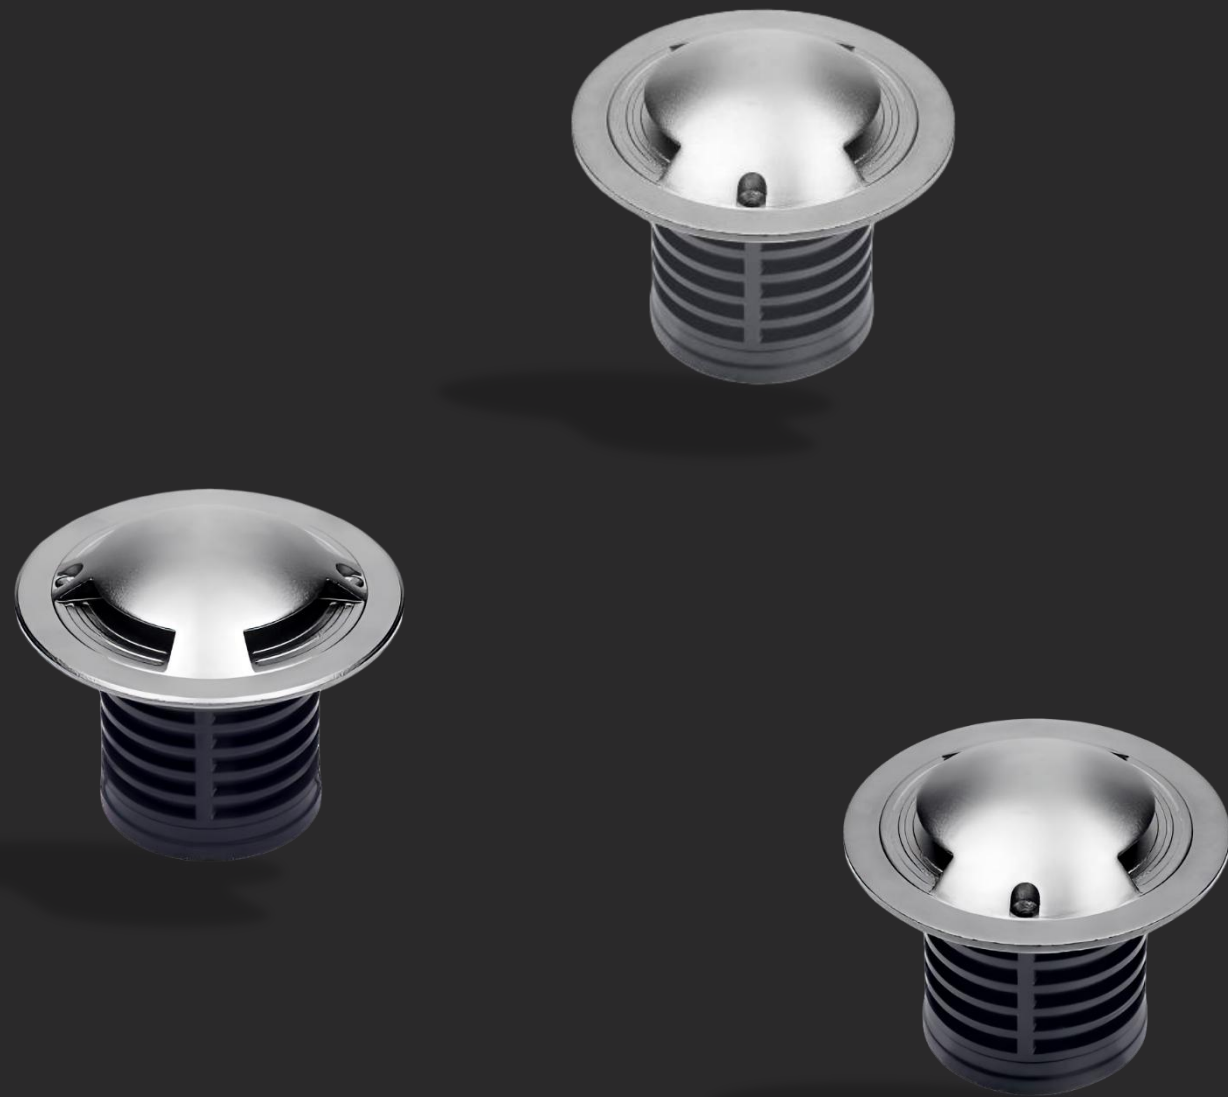

#### Product Description



- IP67 for outdoor lighting.
- One way, two ways, 4 ways lighting.
- Surface cover in S316 stainless steel, drive over, perfect for path and drive way lighting.
- Various size optional.
- RGBW 4in1 DMX512, Triac, PWM, 0-10V, DALI dimmable.
- Body in die-casting aluminum, durable and robust.
- Various light source optional: COB LED, high-power LED, SMD LED.
- 5 years warranty.
- CE, ROHS, UKCA certified.

# AL-E2 Drive Over In-ground Light


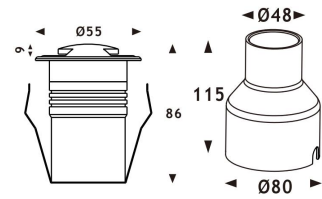


Product Code	Power	LED	Voltage	Lighting Ways	Lumen	Color	IK	IP
AL-E2W	1*2W	OSRAM/CREE	12/24VDC 120-240VAC	1WAY/2WAYS/4WAYS	115lm	Single	09	67
	1*2W	OSRAM	12/24VDC		10lm	RGB 3in1		




# AL-E2 Drive Over In-ground Light

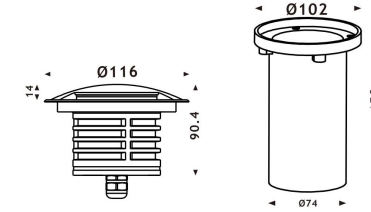

Product Code	Power	LED	Voltage	Lighting Sides	Lumen	Color	IK	IP
AL-E2CDA	6W	OSRAM	12/24VDC 120-240VAC	1WAY/2WAYS/4WAYS	100lm	Single	09	67
	6W	OSRAM	12/24VDC		30lm	RGB 3in1		
	3*2W	OSRAM	12/24VDC		100lm	Single		

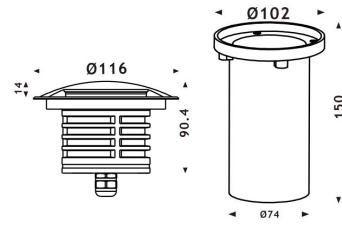


Product Code	Power	LED	Voltage	Lighting Sides	Lumen	Color	IK	IP
AL-E2CD	6W	OSRAM	12/24VDC 120-240VAC	1WAY/2WAYS/4WAYS	100lm	Single	10	67
	6W	OSRAM	12/24VDC		30lm	RGB 3in1		
	2*3W	OSRAM	12/24VDC 120-240VAC		210lm	Single		

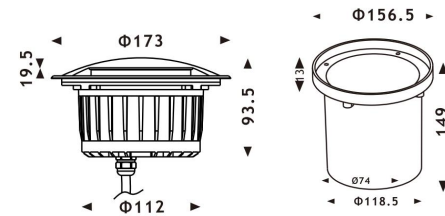


Product Code	Power	LED	Voltage	Lighting Sides	Lumen	Color	IK	IP
AL-E2BE	12W	OSRAM	12/24VDC 120-240VAC	1WAY/2WAYS/4WAYS	200lm	Single	09	67
	12W	OSRAM	12/24VDC		30lm	RGB 3in1		
	6*2W	OSRAM	12/24VDC 120-240VAC		200lm	Single		


# AL-2L Linear In-ground Light

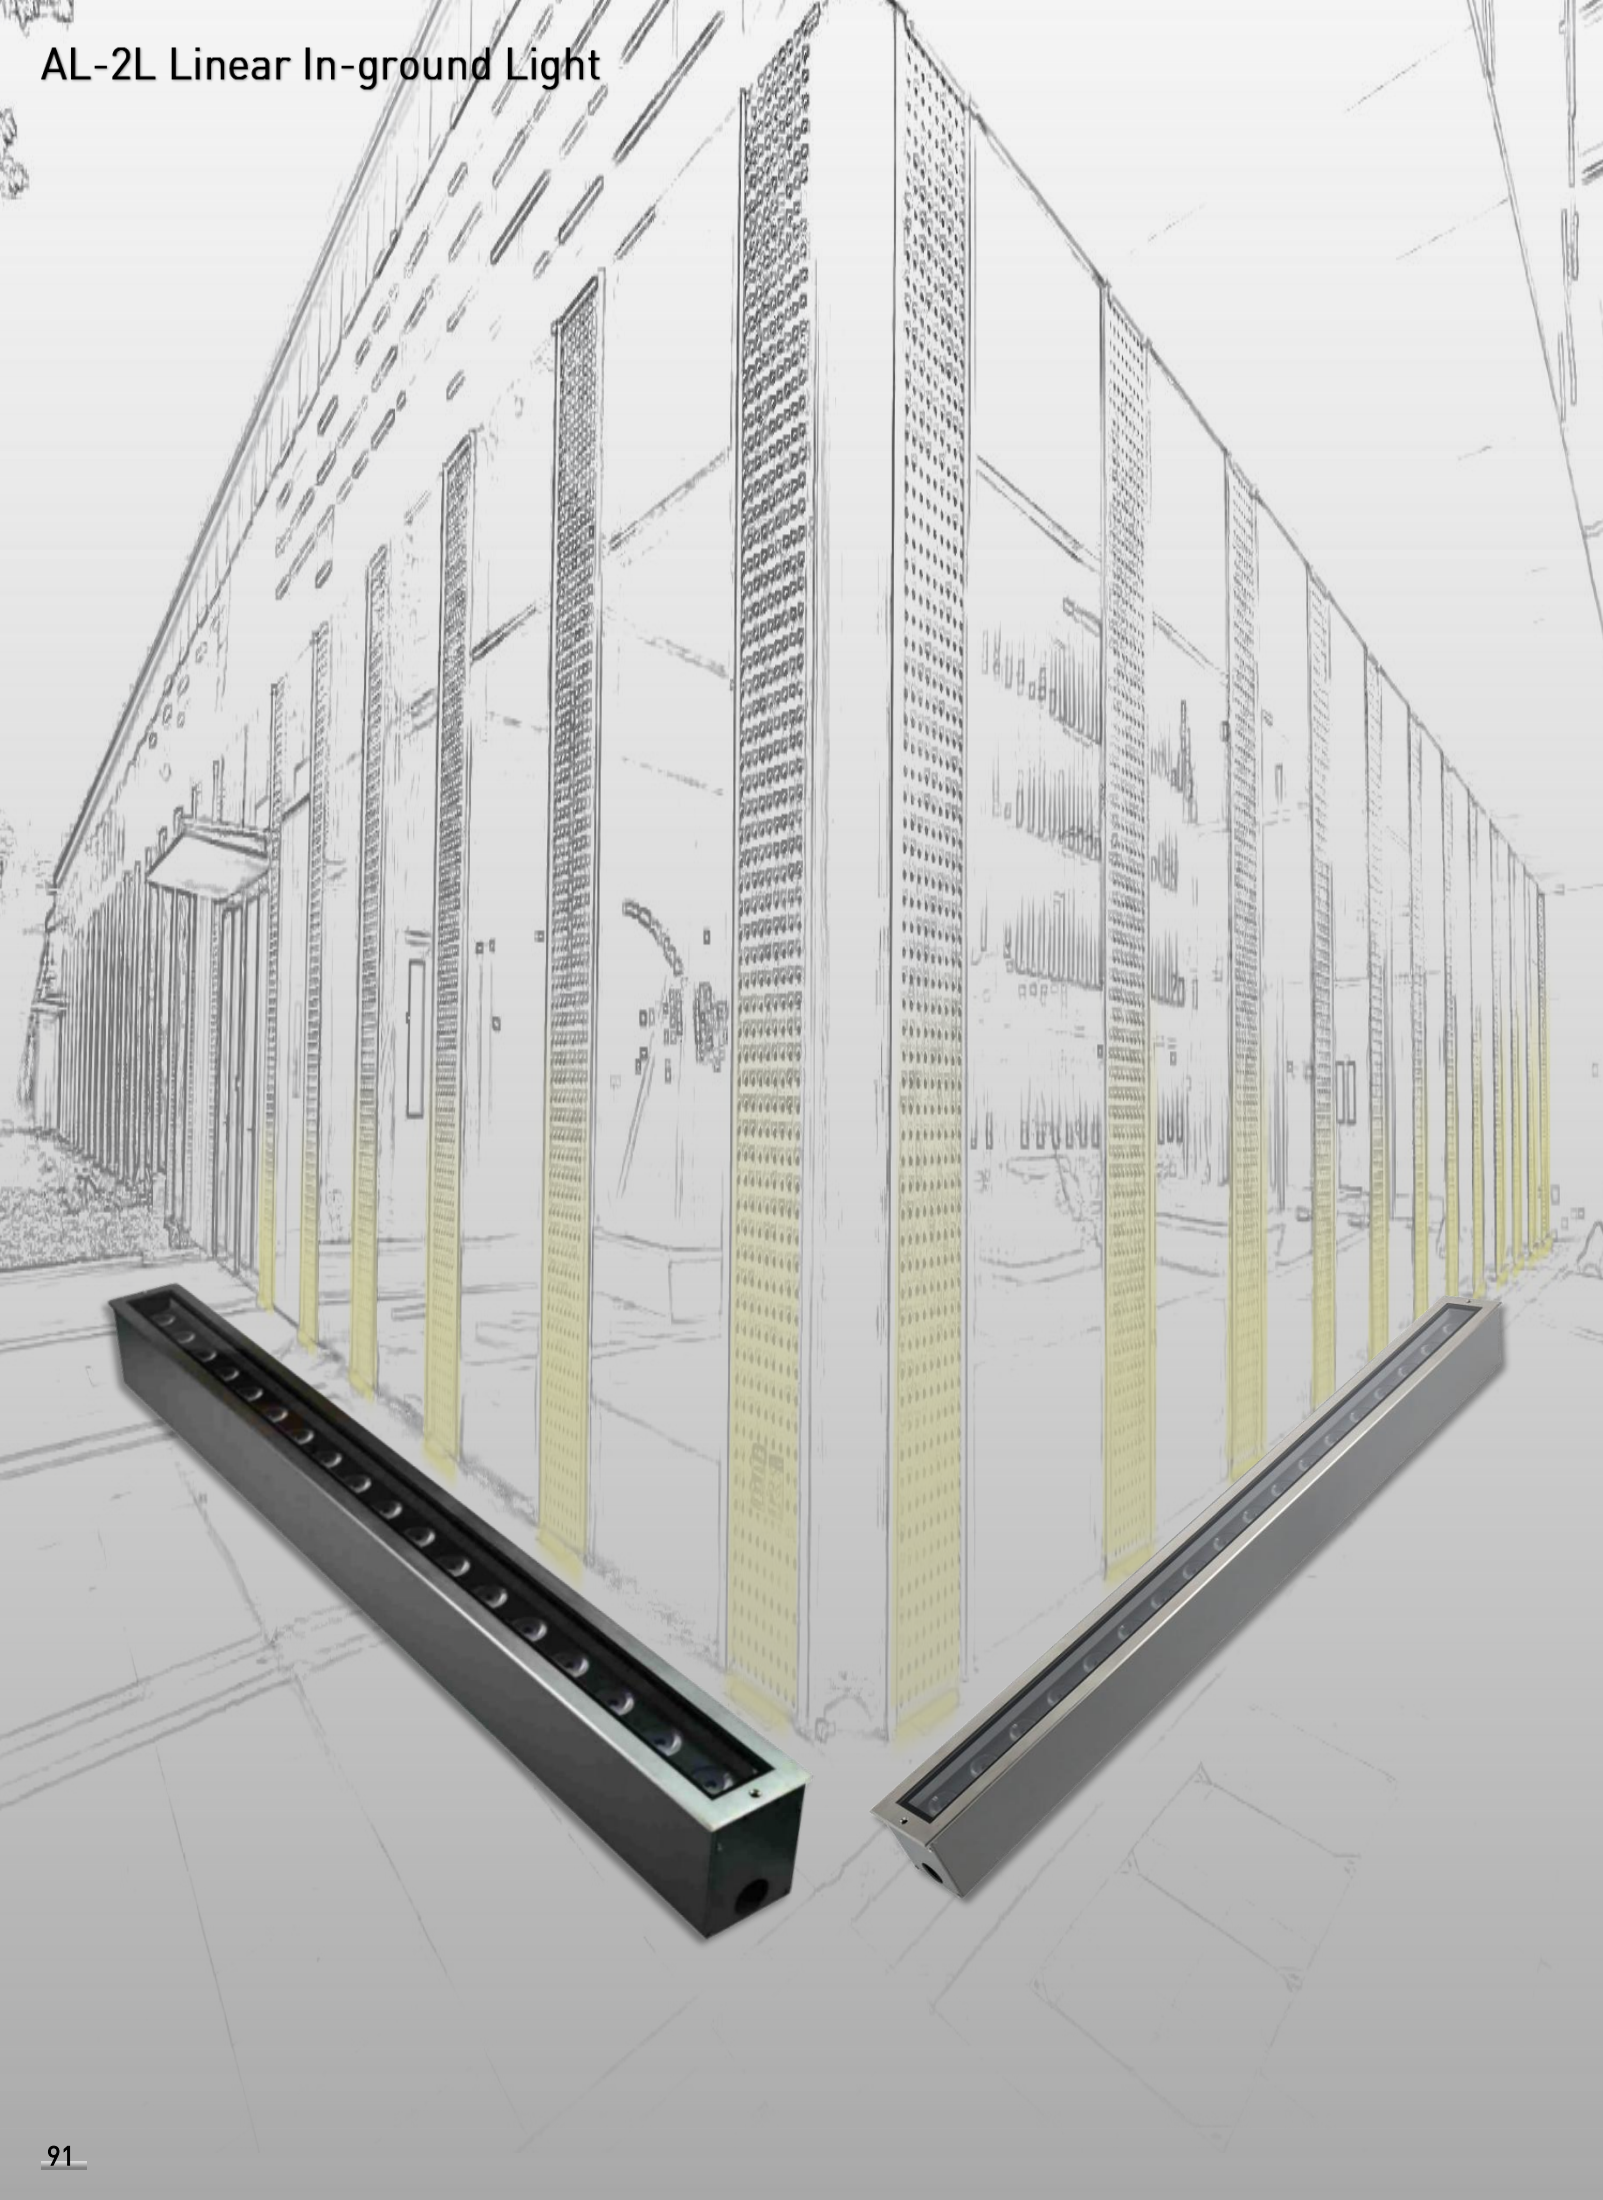


## Product Description

- IP67 for outdoor lighting.
- Linear shape, perfect for road and outline lighting.
- Surface cover in S316 stainless steel, suitable for costal lighting applications.
- Various size optional.
- Professional optical accessories.
- RGBW 4in1 DMX512, Triac, PWM, 0-10V, DALI dimmable.
- Housing in die-casting aluminum, durable and robust.
- Various light source optional: COB LED, high-power LED, SMD LED.
- 5 years warranty.
- CE, ROHS, UKCA certified.

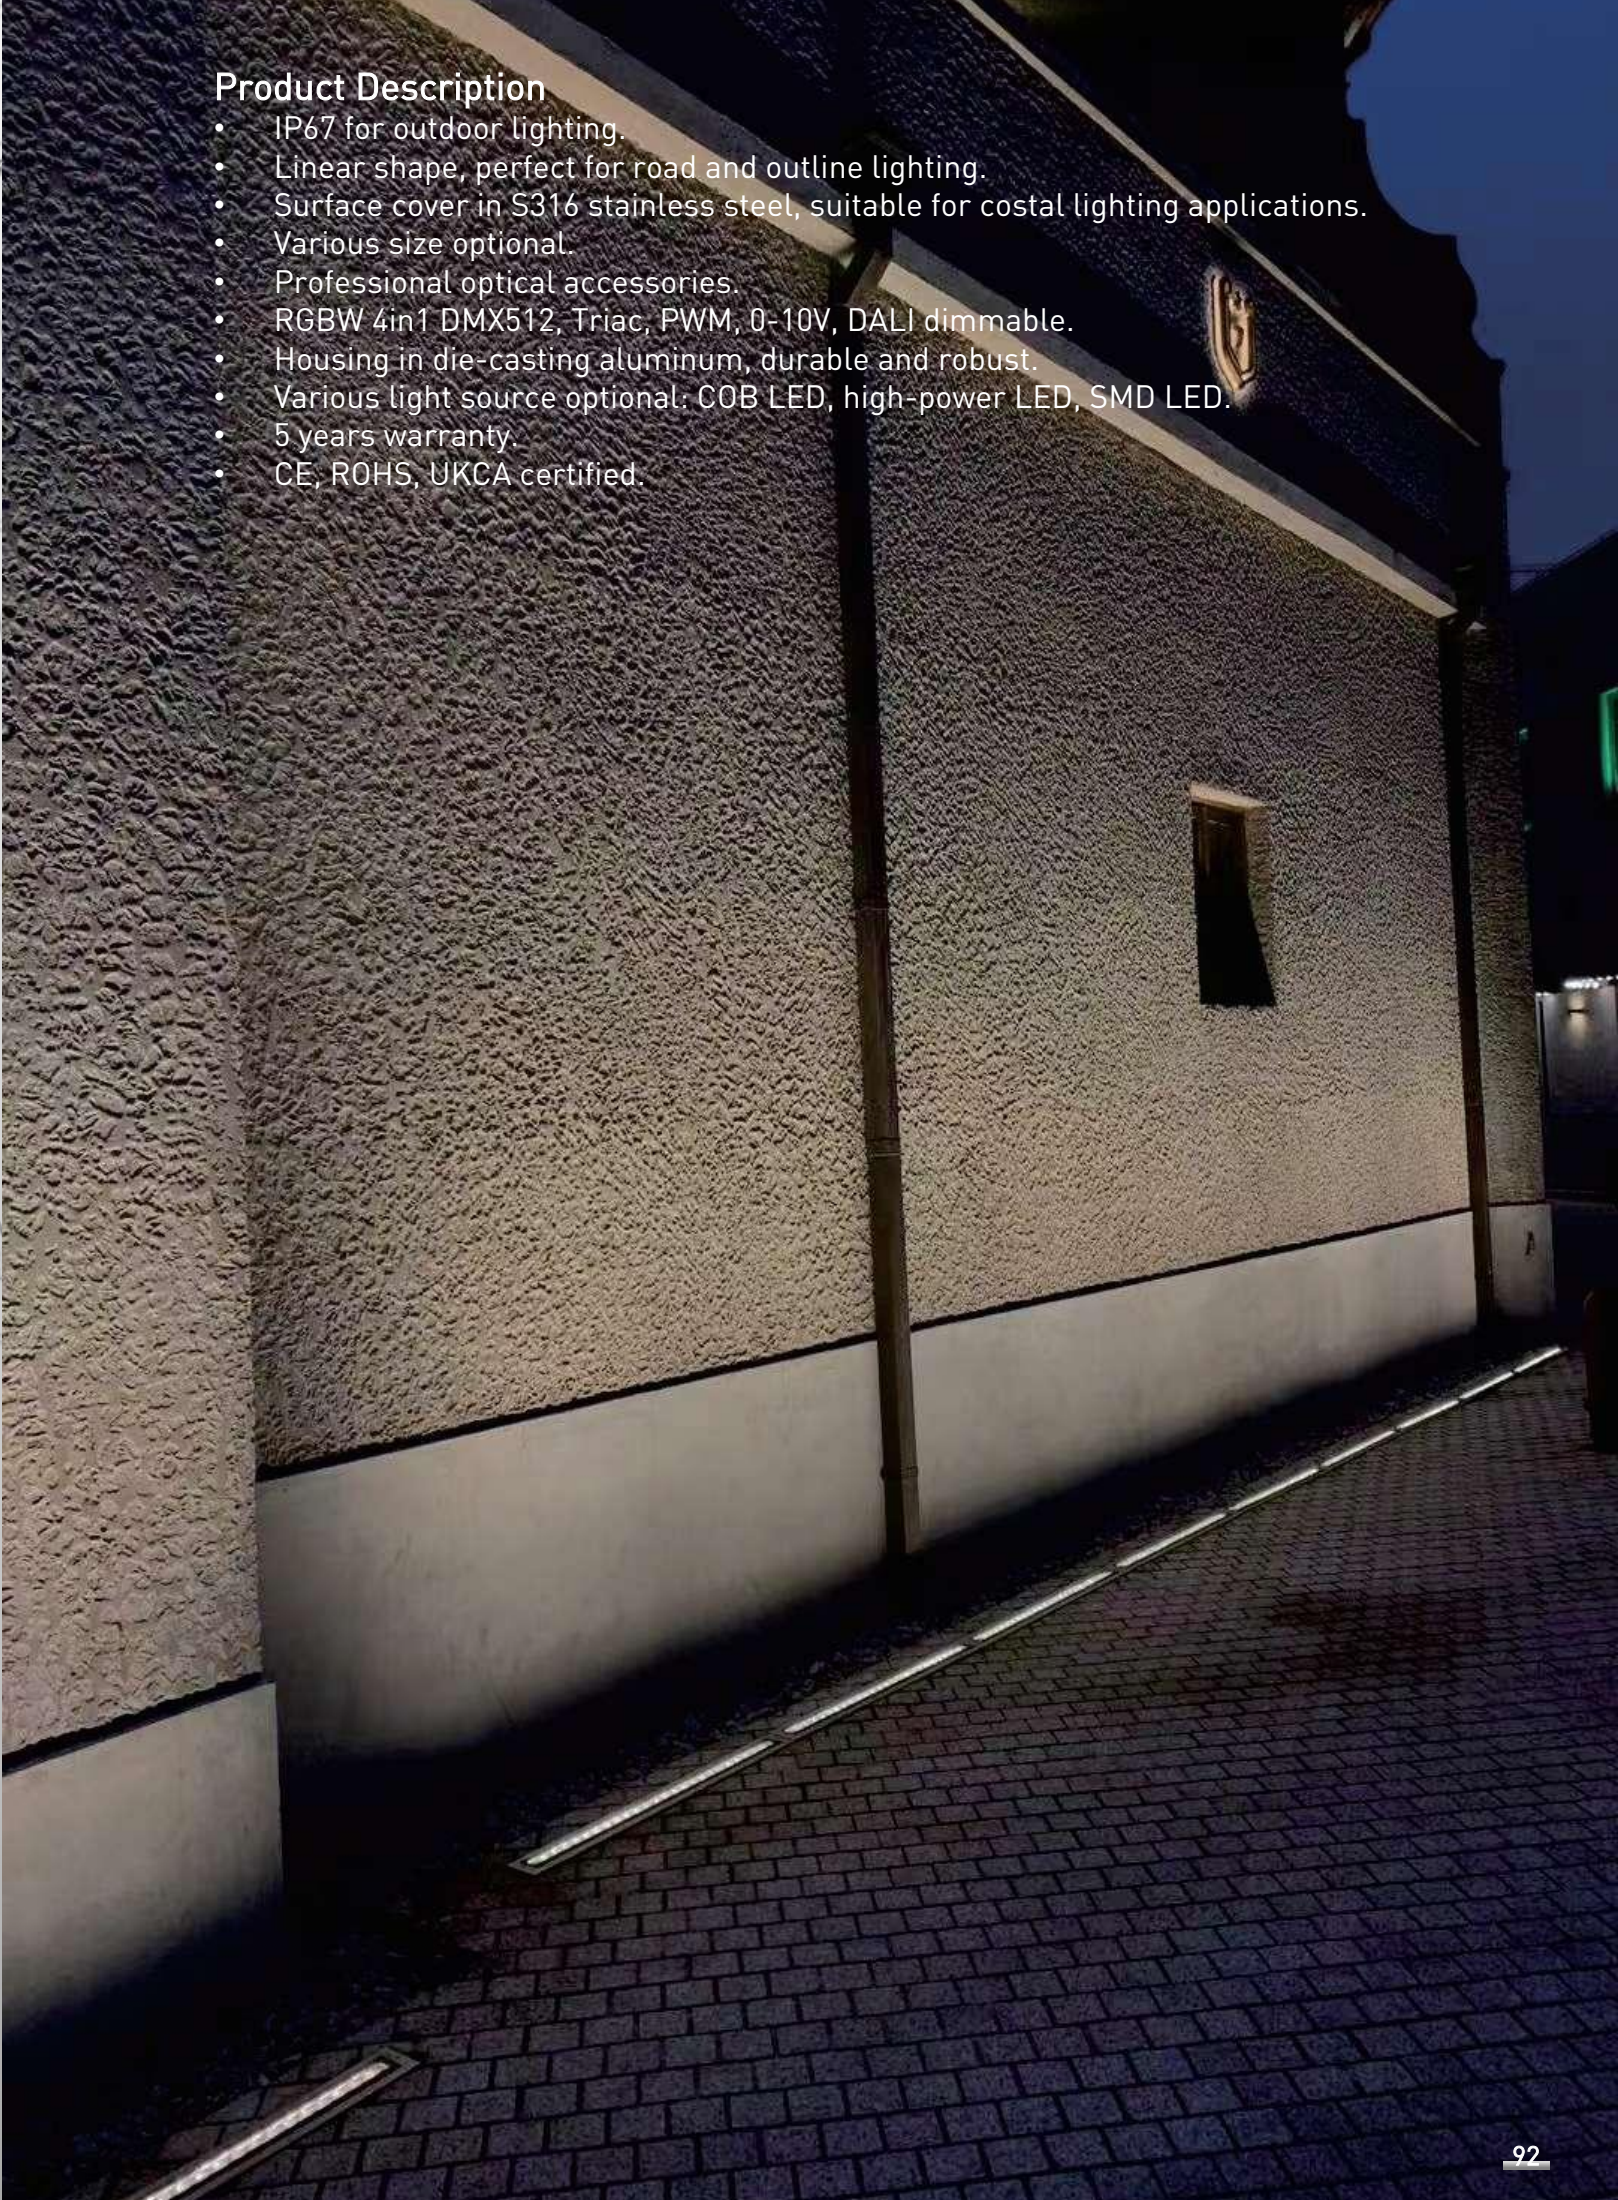


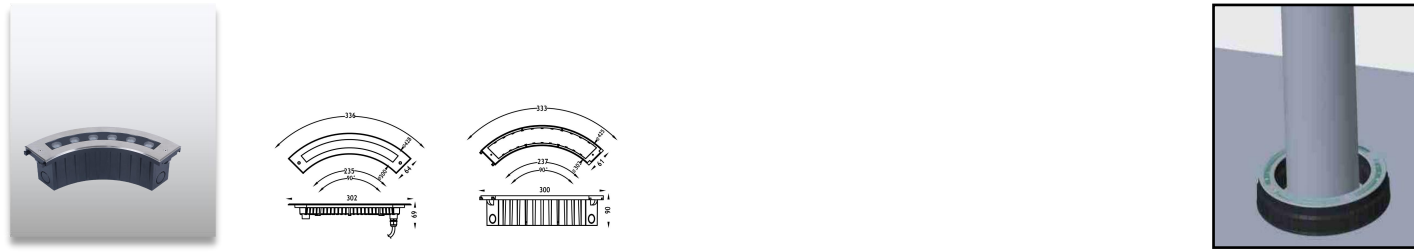


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
	6*2W	OSRAM	12/24VDC 120-240VAC	8°/12°/25°/40°/60°	960lm	Single		
AL-2CLA	6*2.5W	OSRAM	12/24VDC	12°/25°/40°/60°	435lm	RGB 3in1	08	67
	6*3.5W	OSRAM	12/24VDC	12°/25°/40°/60°	600lm	RGBW 4in1		

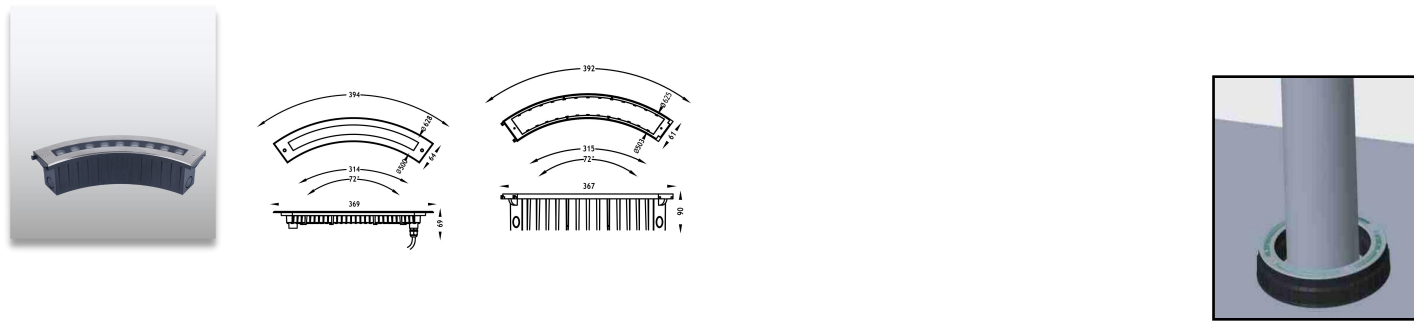


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
	9*2W	OSRAM	12/24VDC 120-240VAC	8°/12°/25°/40°/60°	1380lm	Single		
AL-2CLB	9*2.5W	OSRAM	12/24VDC	12°/25°/40°/60°	660lm	RGB 3in1	08	67
	9*3.5W	OSRAM	12/24VDC	12°/25°/40°/60°	928lm	RGBW 4in1		

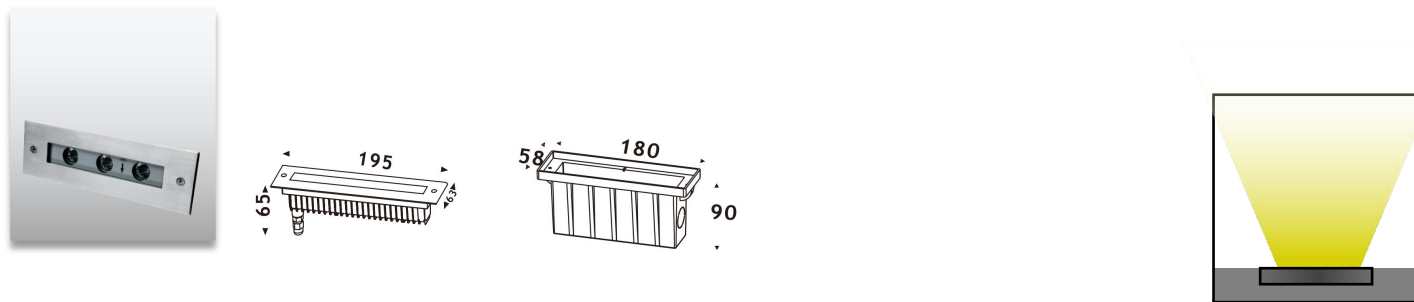


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
	3*2W	OSRAM	12/24VDC 120-240VAC	8°/12°/25°/40°/60°	530lm	Single		
AL-2FL	3*2.5W	OSRAM	12/24VDC	12°/25°/40°/60°	210lm	RGB 3in1	08	67
	3*3.5W	OSRAM	12/24VDC	12°/25°/40°/60°	310lm	RGBW 4in1		

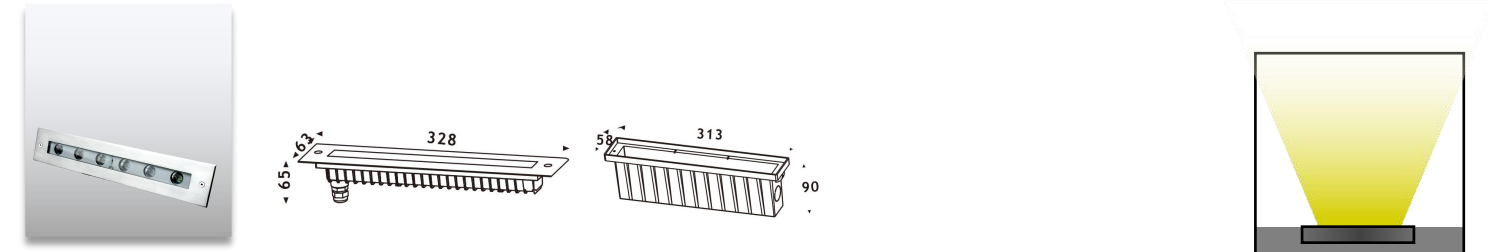


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
	6*2W	OSRAM	12/24VDC 120-240VAC	8°/12°/25°/40°/60°	960lm	Single		
AL-2BL	6*2.5W	OSRAM	12/24VDC	8°/12°/25°/40°/60°	435lm	RGB 3in1	08	67
	6*3.5W	OSRAM	12/24VDC	8°/12°/25°/40°/60°	600lm	RGBW 4in1		

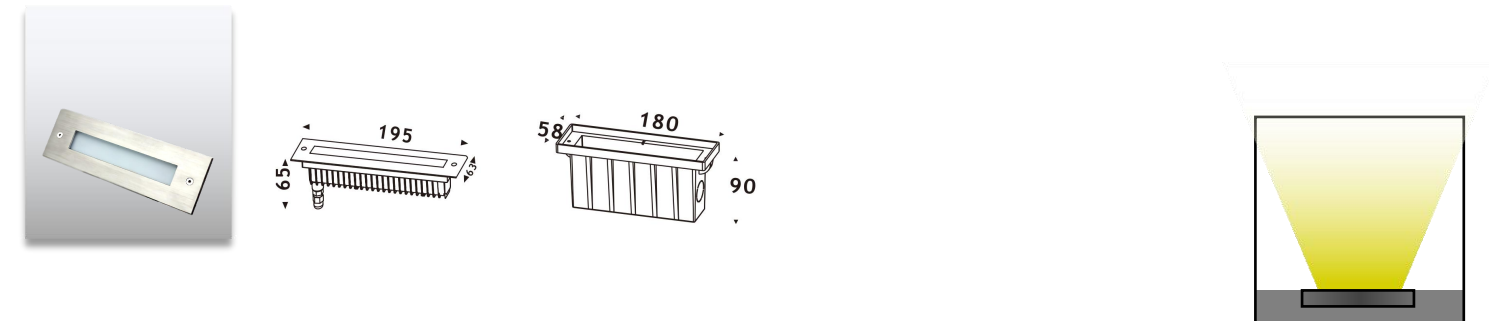

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
	2.2W	OSRAM	12/24VDC 120-240VAC	120°	25lm	Single		
AL-2FL-D	2.2W	OSRAM	12/24VDC	120°	25lm	RGB 3in1	08	67

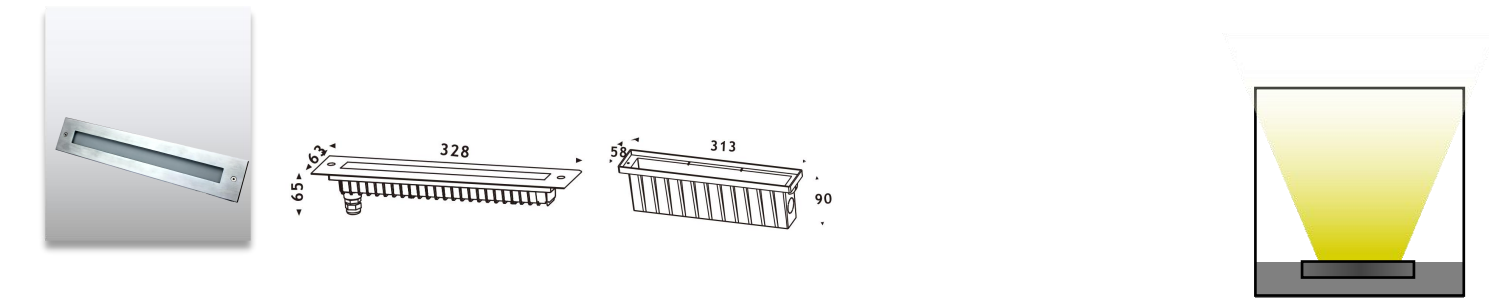


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
	4.8W	OSRAM	12/24VDC 120-240VAC	120°	50lm	Single		
AL-2BL-D	4.8W	OSRAM	12/24VDC	120°	45lm	RGB 3in1	08	67

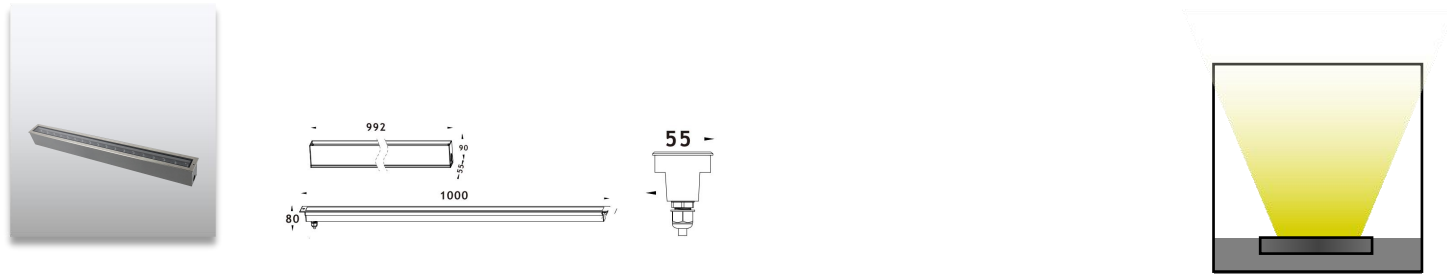


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2ELA	6*2W(0.275M)	OSRAM	12/24VDC 120-240VAC	10*15°/10*60°/30°/60°	700lm	Single		
	12*2W(0.5M)	OSRAM	12/24VDC 120-240VAC	10*15°/10*60°/30°/60°	1390lm	Single		
	24*2W(1M)	OSRAM	12/24VDC 120-240VAC	10*15°/10*60°/30°/60°	2780lm	Single	10	67
	24*2.5W(1M)	OSRAM	12/24VDC	10*15°/10*60°/30°/60°	2780lm	RGB 3in1		
	24*3.5W(1M)	OSRAM	12/24VDC	10*15°/10*60°/30°/60°	2780lm	RGBW 4in1		




Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2DLA	6*2W(0.275M)	OSRAM	12/24VDC 120-240VAC	10*15°/10*60°/45°/60°	700lm	Single		
	12*2W(0.5M)	OSRAM	12/24VDC 120-240VAC	10*15°/10*60°/45°/60°	1390lm	Single		
	24*2W(1M)	OSRAM	12/24VDC 120-240VAC	10*15°/10*60°/45°/60°	2780lm	Single	10	67
	24*2.5W(1M)	OSRAM	12/24VDC	10*15°/10*60°/45°/60°	2780lm	RGB 3in1		
	24*3.5W(1M)	OSRAM	12/24VDC	10*15°/10*60°/45°/60°	2780lm	RGBW 4in1		

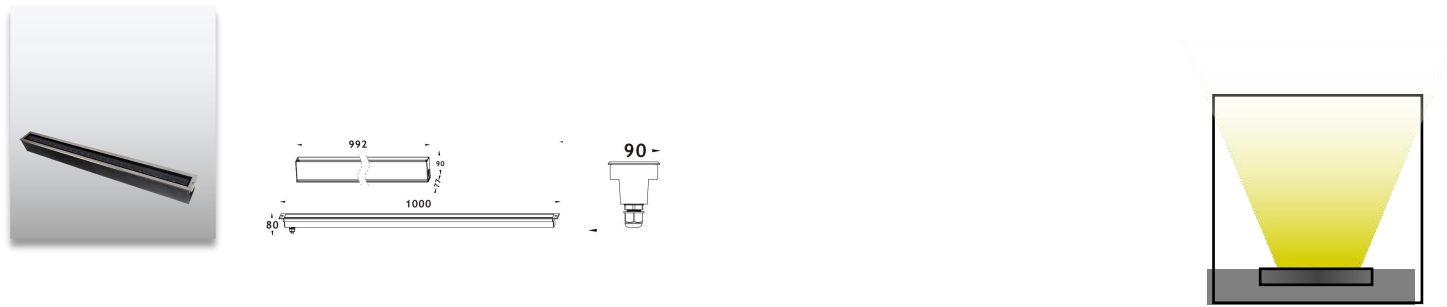

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2ELB	6*2W(0.275M)	OSRAM	12/24VDC 120-240VAC	10*15°/10*60°/45°/60°	700lm	Single		
	12*2W(0.5M)	OSRAM	12/24VDC 120-240VAC	10*15°/10*60°/45°/60°	1390lm	Single		
	24*2W(1M)	OSRAM	12/24VDC 120-240VAC	10*15°/10*60°/45°/60°	2780lm	Single	10	67
	24*2.5W(1M)	OSRAM	12/24VDC	10*15°/10*60°/45°/60°	2780lm	RGB 3in1		
	24*3.5W(1M)	OSRAM	12/24VDC	10*15°/10*60°/45°/60°	2780lm	RGBW 4in1		

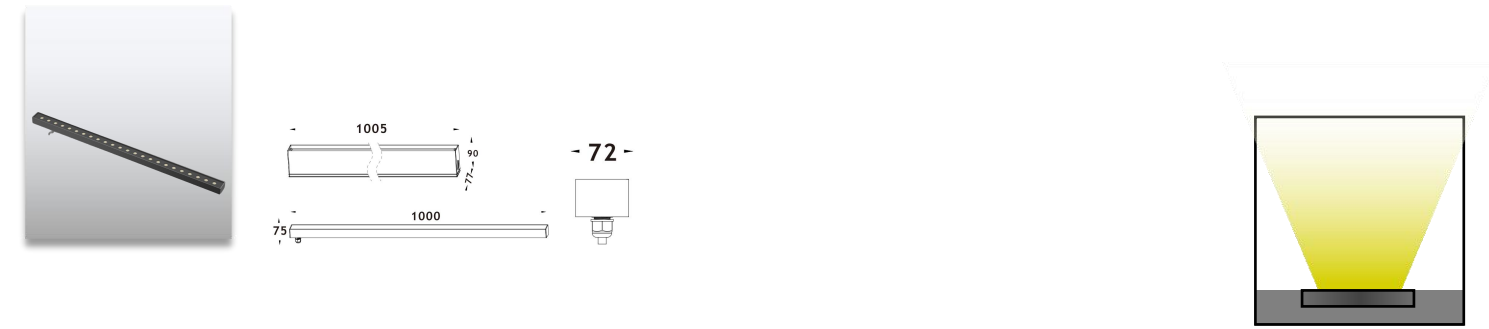

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2DLB	12*1.5W(0.3M)	OSRAM	12/24VDC 120-240VAC	10°/20°/30°/45°/60°	700lm	Single		
	24*1.5W(0.5M)	OSRAM	12/24VDC 120-240VAC	10°/20°/30°/45°/60°	1390lm	Single		
	48*1.5W(1M)	OSRAM	12/24VDC 120-240VAC	10°/20°/30°/45°/60°	2780lm	Single	10	67
	48*2W(1M)	OSRAM	12/24VDC	10°/20°/30°/45°/60°	2780lm	RGB 3in1		
	48*2W(1M)	OSRAM	12/24VDC	10°/20°/30°/45°/60°	2780lm	RGBW 4in1		

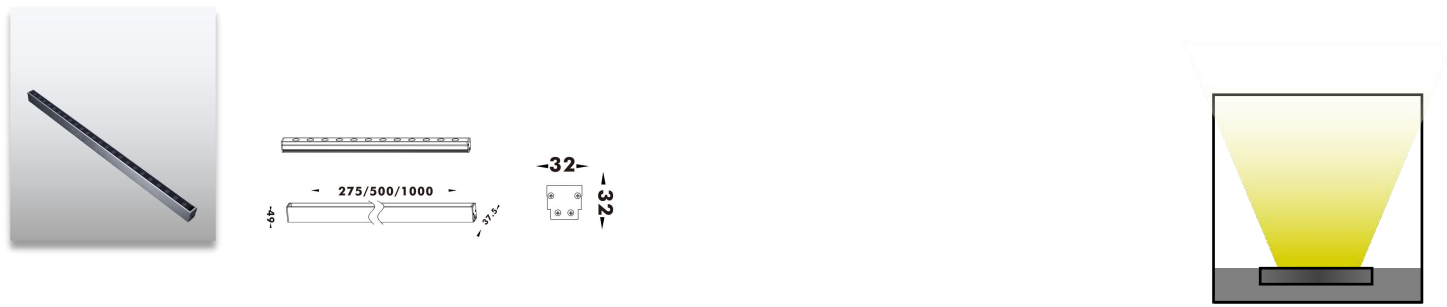

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2HL	6*2W(0.275M)	OSRAM	12/24VDC	10*15°/10*60°/45°/60°	610lm	Single		
	12*1.5W(0.5M)	OSRAM	12/24VDC	10*15°/10*60°/45°/60°	1220lm	Single	08	67
	24*1.5W(1M)	OSRAM	12/24VDC	10*15°/10*60°/45°/60°	2450lm	Single		

## AL-2C Series In-ground Light




## Product Description

- IP67 for outdoor lighting.
- Surface cover in S316 stainless steel, suitable for coastal lighting applications.
- Various size optional, from Diameter 30mm to Diameter 80mm.
- RGBW 4in1 DMX512, Triac, PWM, 0-10V, DALI dimmable.
- Housing in die-casting aluminum housing, durable and robust.
- Round and square shape.
- High lumen output COB LED light source.
- 5 years warranty.
- CE, ROHS, UKCA certified.



# AL-2C Series In-ground Light

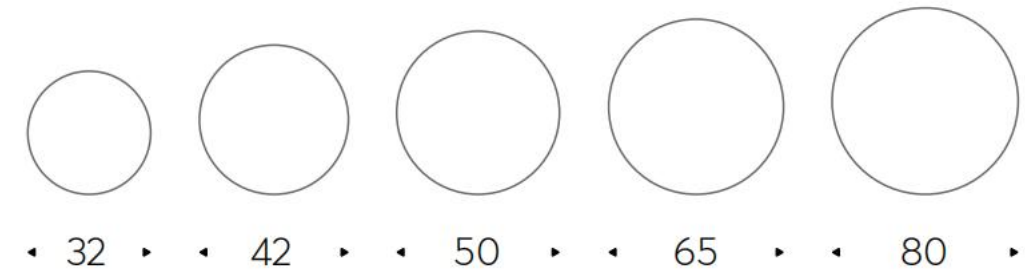





Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2C-R32	1*2W	CREE/OSRAM	12/24VDC 120-240VAC	10°/15°/24°/36°/60°	160lm	Single	08	67




Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2C-R42	1*4W	CREE COB	12/24VDC 120-240VAC	12°/24°/36°/55°	320lm	Single	08	67

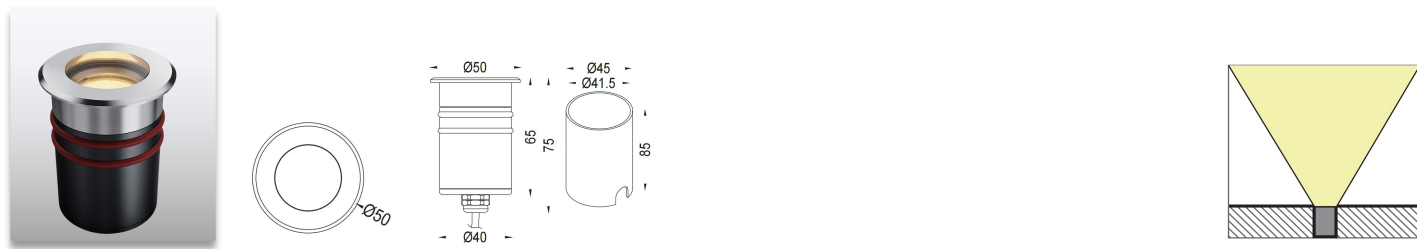


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2C-R50	1*4.5W	CREE COB	12/24VDC 120-240VAC	12°/24°/36°/55°	360lm	Single	08	67

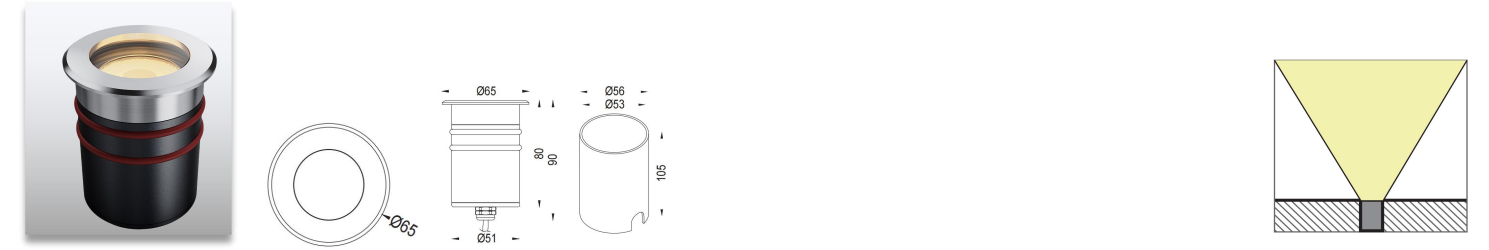

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2C-R65	1*6.5W	CREE COB	12/24VDC 120-240VAC	12°/24°/36°/55°	520lm	Single	08	67

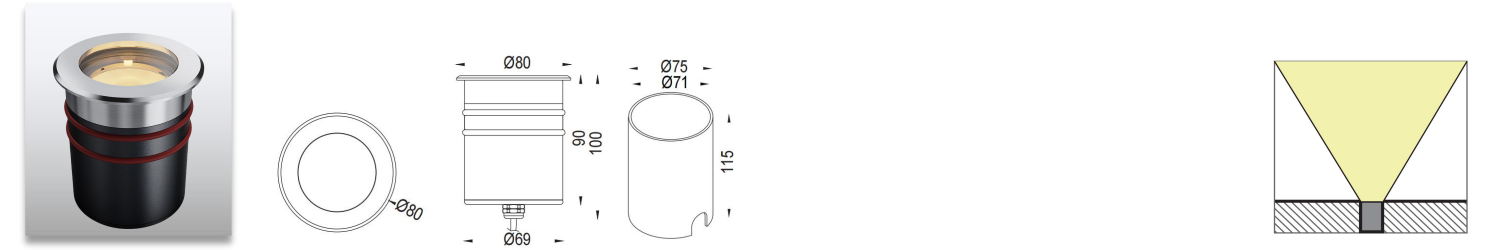

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2C-R80	1*10W	CREE COB	12/24VDC 120-240VAC	12°/24°/36°/55°	800lm	Single	08	67

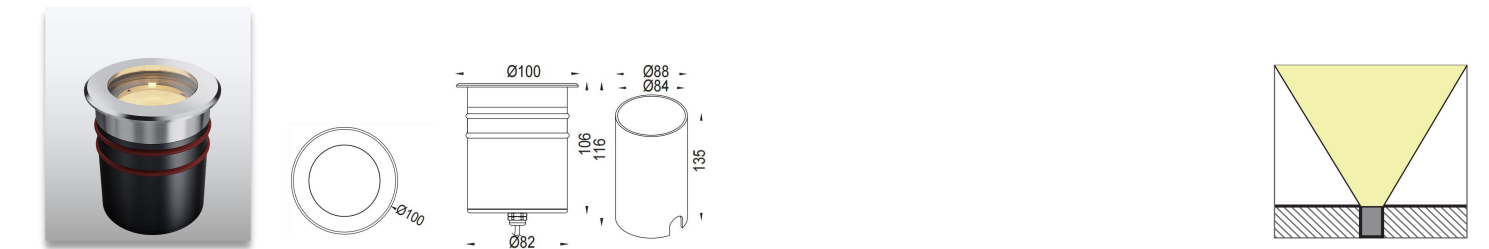


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2C-R100	1*15W	CREE COB	12/24VDC 120-240VAC	12°/24°/36°/55°	1200lm	Single	08	67




Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2C-S32	1*2W	CREE/OSRAM	12/24VDC 120-240VAC	10°/15°/24°/36°/60°	160lm	Single	08	67




Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2C-S42	1*4W	CREE COB	12/24VDC 120-240VAC	12°/24°/36°/55°	320lm	Single	08	67

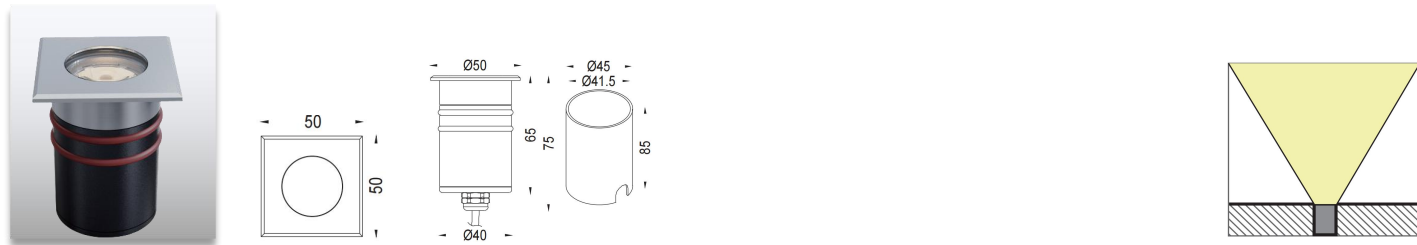


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2C-S50	1*4.5W	CREE COB	12/24VDC 120-240VAC	12°/24°/36°/55°	360lm	Single	08	67

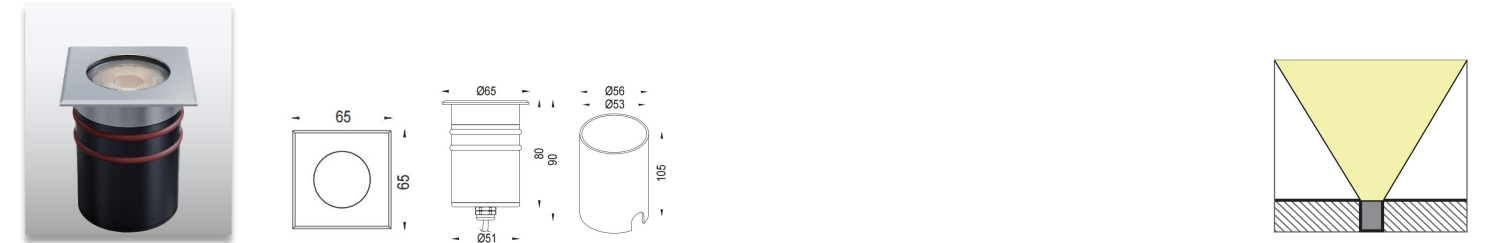

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2C-S65	1*6.5W	CREE COB	12/24VDC 120-240VAC	12°/24°/36°/55°	520lm	Single	08	67

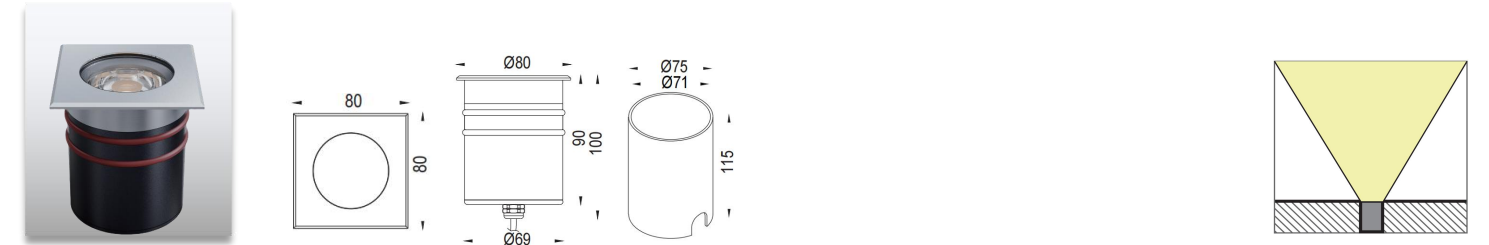

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2C-S80	1*10W	CREE COB	12/24VDC 120-240VAC	12°/24°/36°/55°	800lm	Single	08	67

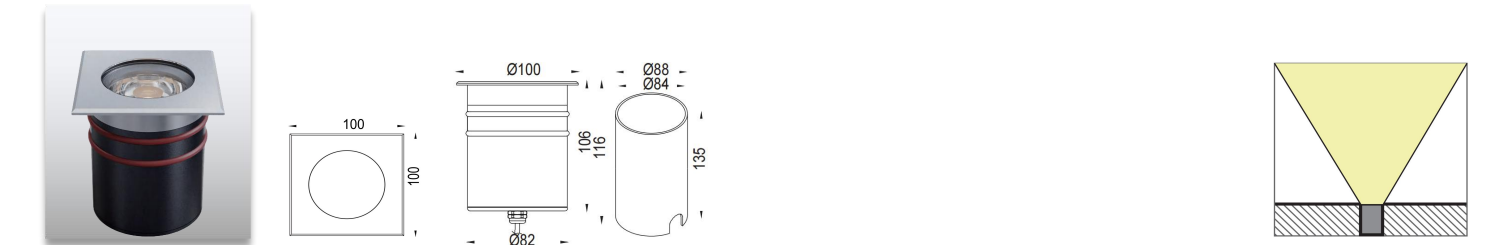


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2C-S100	1*15W	CREE COB	12/24VDC 120-240VAC	12°/24°/36°/55°	1200lm	Single	08	67




Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2C-H32	1*2W	CREE/OSRAM	12/24VDC 120-240VAC	10°/15°/24°/36°/60°	94lm	Single	08	67




Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2C-H42	1*4W	CREE COB	12/24VDC 120-240VAC	12°/24°/36°/55°	188lm	Single	08	67

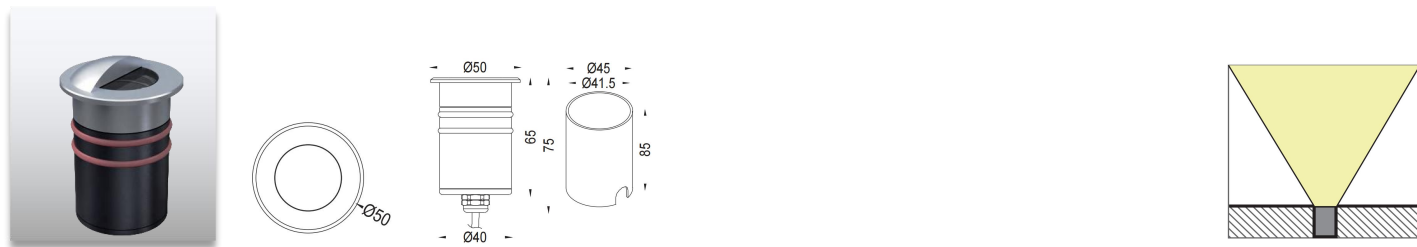


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2C-H50	1*4.5W	CREE COB	12/24VDC 120-240VAC	12°/24°/36°/55°	211lm	Single	08	67

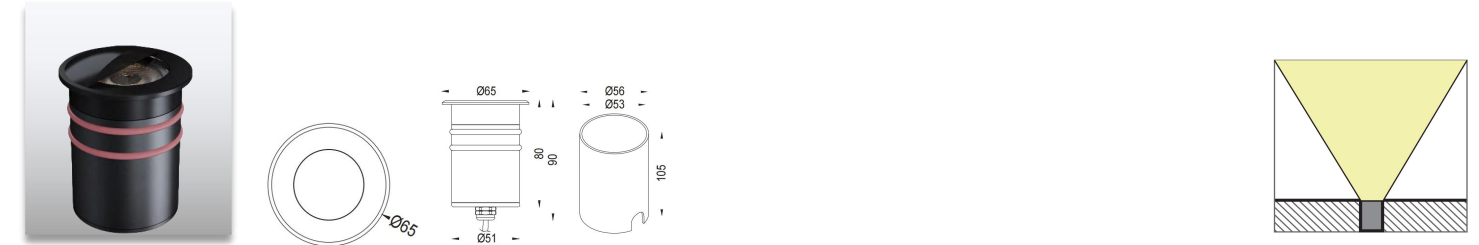

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2C-H65	1*6.5W	CREE COB	12/24VDC 120-240VAC	12°/24°/36°/55°	305lm	Single	08	67

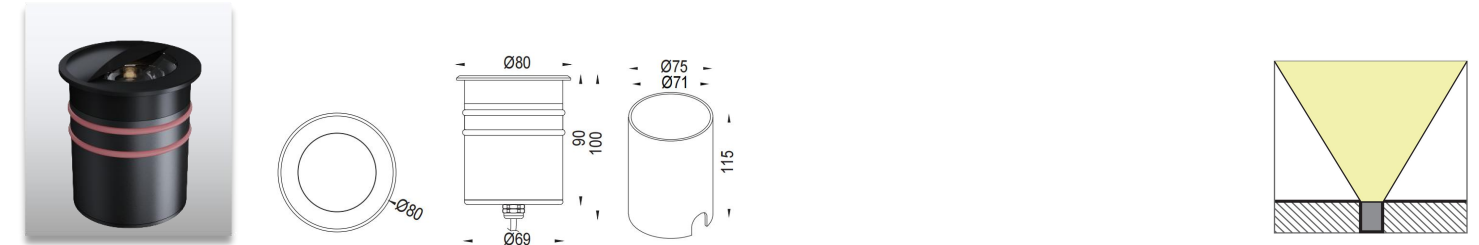

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2C-H80	1*10W	CREE COB	12/24VDC 120-240VAC	12°/24°/36°/55°	470lm	Single	08	67

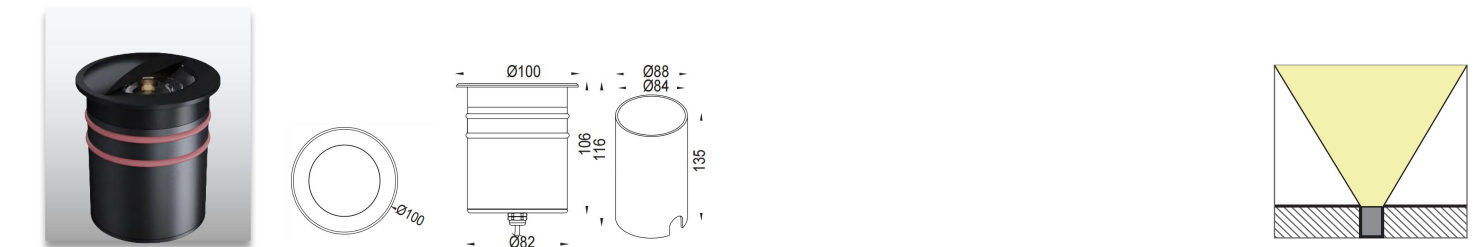

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2C-H100	1*15W	CREE COB	12/24VDC 120-240VAC	12°/24°/36°/55°	705lm	Single	08	67




Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2C-C32	1*2W	CREE/OSRAM	12/24VDC 120-240VAC	10°/15°/24°/36°/60°	180lm	Single	08	67




Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2C-C42	1*4W	CREE COB	12/24VDC 120-240VAC	12°/24°/36°/55°	360lm	Single	08	67




Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2C-C50	1*4.5W	CREE COB	12/24VDC 120-240VAC	12°/24°/36°/55°	405lm	Single	08	67

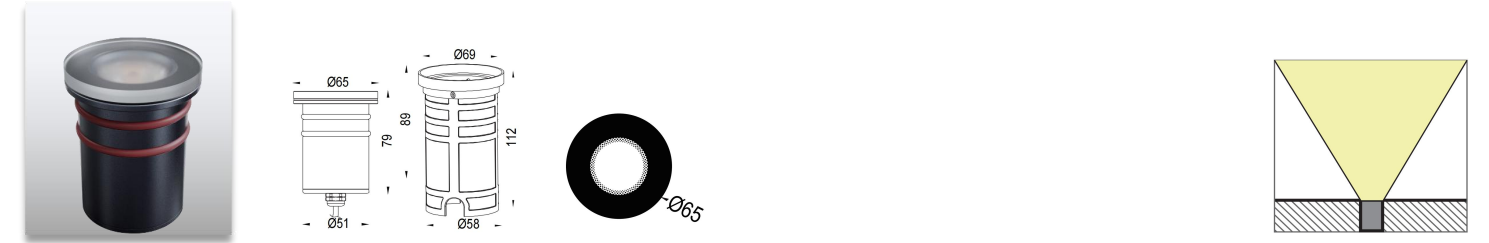

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2C-C65	1*6.5W	CREE COB	12/24VDC 120-240VAC	12°/24°/36°/55°	585lm	Single	08	67

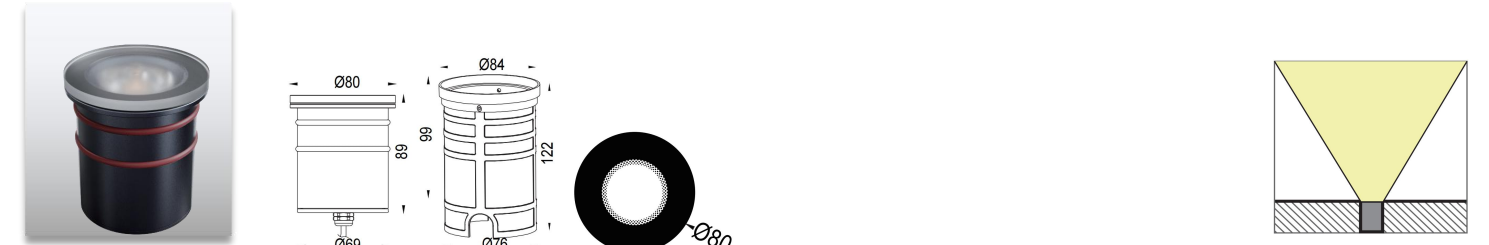


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2C-C80	1*10W	CREE COB	12/24VDC 120-240VAC	12°/24°/36°/55°	900lm	Single	08	67

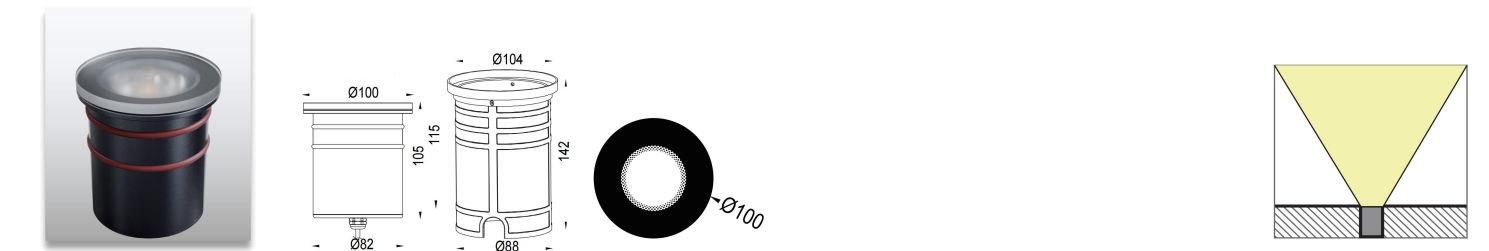


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2C-C100	1*15W	CREE COB	12/24VDC 120-240VAC	12°/24°/36°/55°	1350lm	Single	08	67

AL-2C Series LED In-ground Light




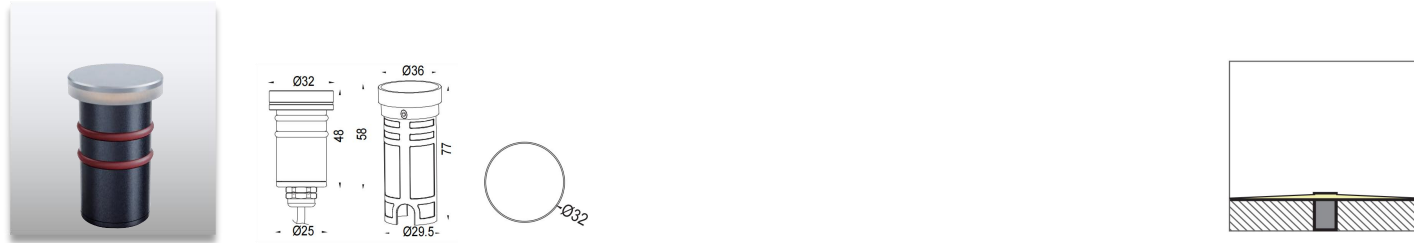


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2C-P32	1*2W	CREE/OSRAM	12/24VDC 120-240VAC	10°/15°/24°/36°/60°	6lm	Single	08	67

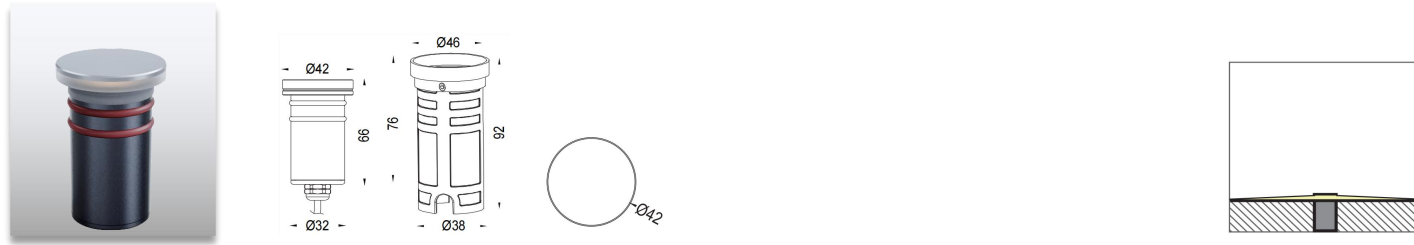


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2C-P42	1*4W	CREE COB	12/24VDC 120-240VAC	12°/24°/36°/55°	12lm	Single	08	67

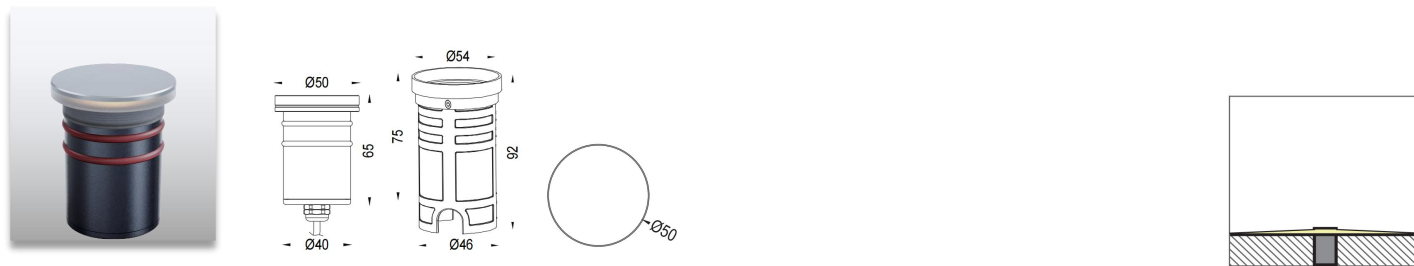


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2C-P50	1*4.5W	CREE COB	12/24VDC 120-240VAC	12°/24°/36°/55°	14lm	Single	08	67

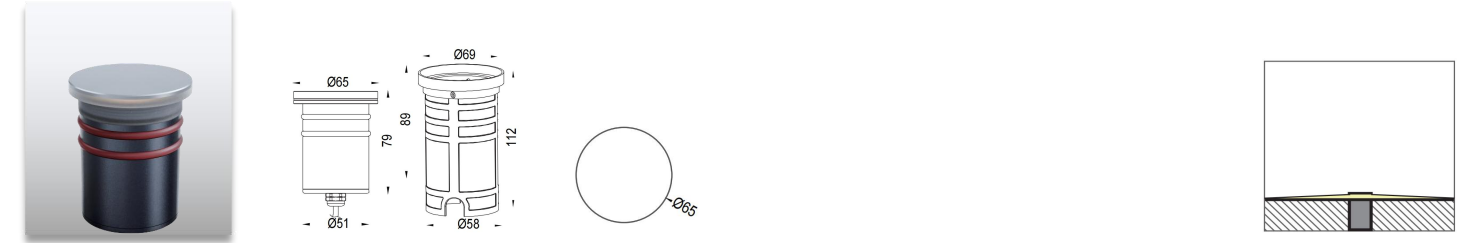

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2C-C65	1*6.5W	CREE COB	12/24VDC 120-240VAC	12°/24°/36°/55°	20lm	Single	08	67

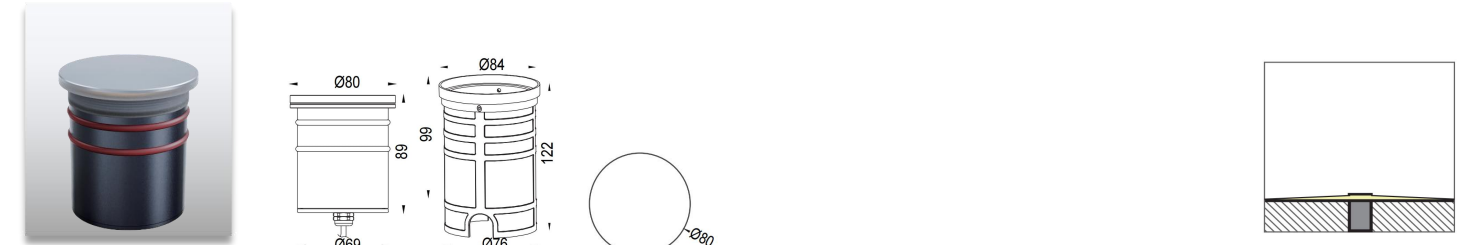

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2C-C80	1*10W	CREE COB	12/24VDC 120-240VAC	12°/24°/36°/55°	30lm	Single	08	67

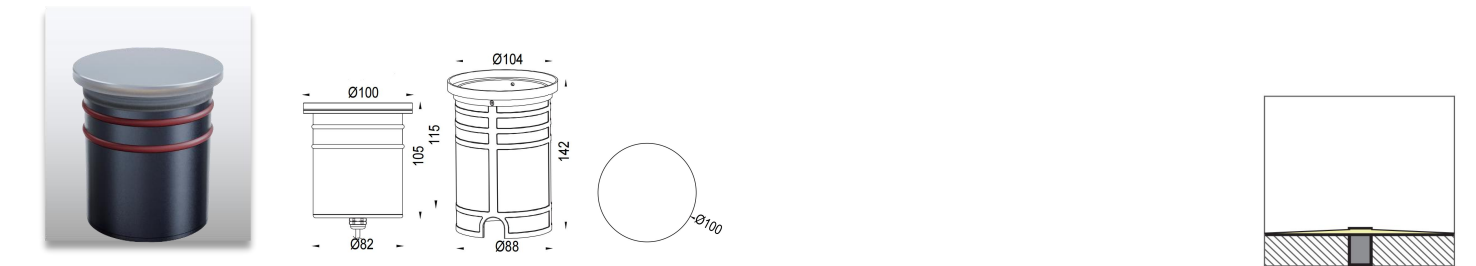


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2C-C100	1*15W	CREE COB	12/24VDC 120-240VAC	12°/24°/36°/55°	45lm	Single	08	67

AL-2C Series LED Drive Over Light







Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2C-D32	1*2W	CREE/OSRAM	12/24VDC 120-240VAC	10°/15°/24°/36°/60°	10lm	Single	08	67

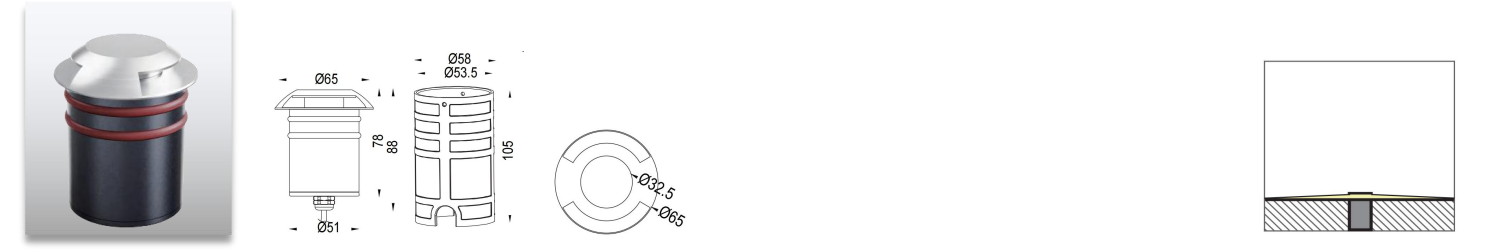


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2C-D65	1*6.5W	CREE COB	12/24VDC 120-240VAC	12°/24°/36°/55°	32lm	Single	08	67

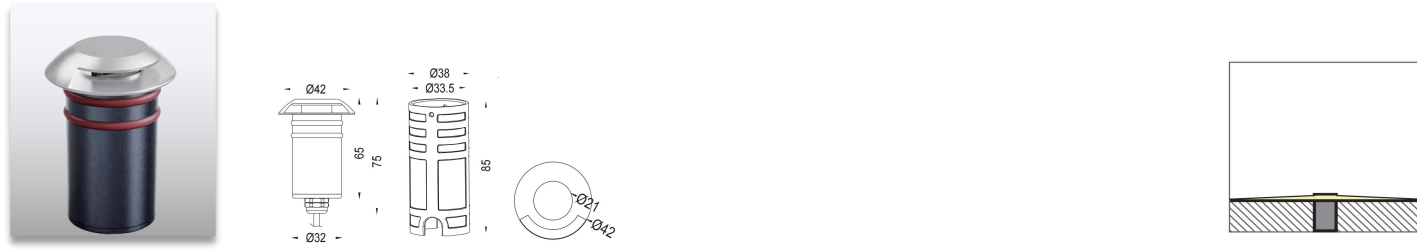


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2C-D42	1*4W	CREE COB	12/24VDC 120-240VAC	12°/24°/36°/55°	20lm	Single	08	67

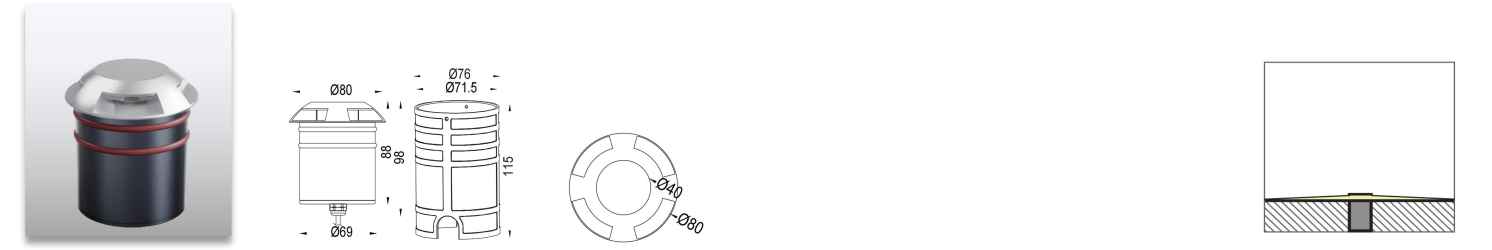

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2C-D80	1*10W	CREE COB	12/24VDC 120-240VAC	12°/24°/36°/55°	50lm	Single	08	67

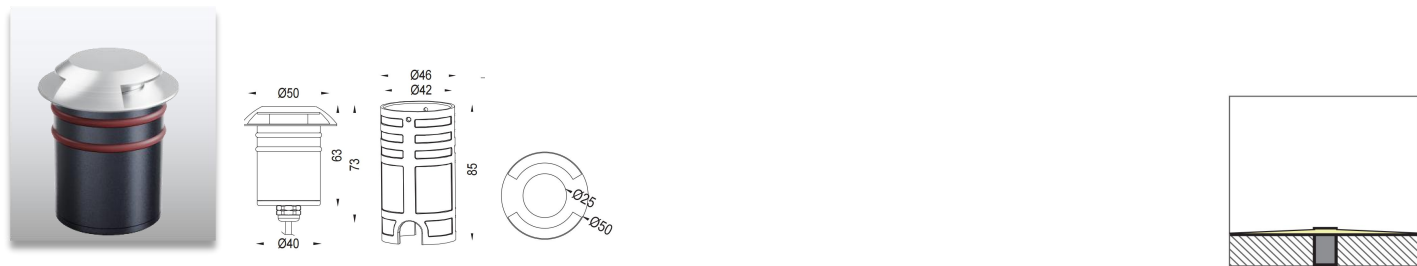

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2C-D50	1*4.5W	CREE COB	12/24VDC 120-240VAC	12°/24°/36°/55°	23lm	Single	08	67

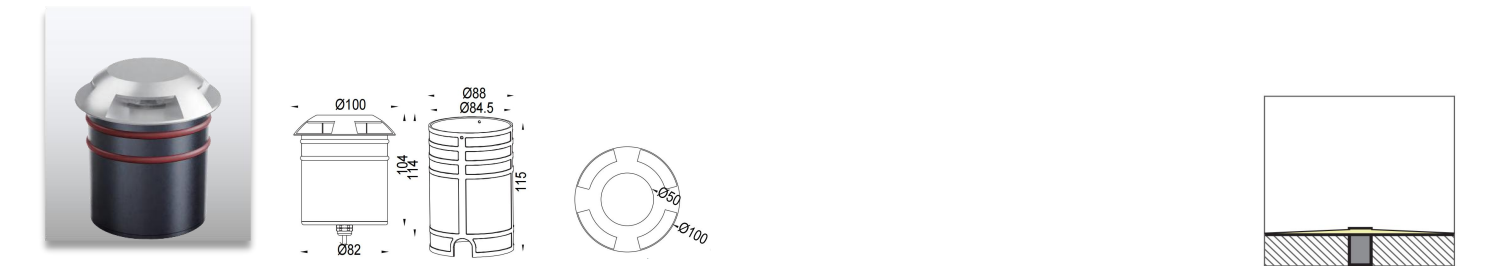

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-2C-D100	1*15W	CREE COB	12/24VDC 120-240VAC	12°/24°/36°/55°	75lm	Single	08	67

AL-1W LED Wall Light



Product Description


- IP65, Wall mounted for outdoor lighting applications.
- Single or double beam.
- Surface mounted.
- Body in die-casting aluminum with powder coating.
- White, black and bespoke finishes.
- COB LED light source, high lumen output.
- 2700K, 3000K, 4000K, 6000K, CRI90+.
- Various power optional: 1\*5W ~ 2\*18W.
- Round and square shape.
- 5 years warranty.
- CE, ROHS, UKCA certified.




# AL-1W Surface Mounted Wall Light



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-1WFL-S1	1*5W	CREE COB	12/24VDC 120-240VAC	10°/18°/22°/30°/60°	408lm	Single	05	65

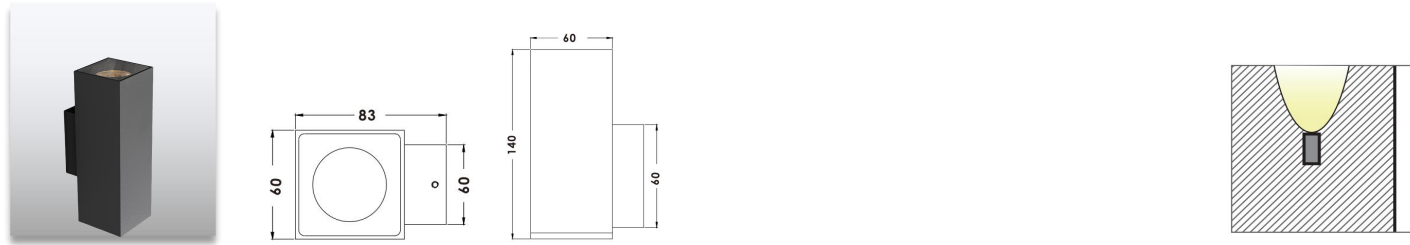


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-1WFL-S2	1*10W	CREE COB	12/24VDC 120-240VAC	10°/18°/22°/30°/60°	1180lm	Single	05	65

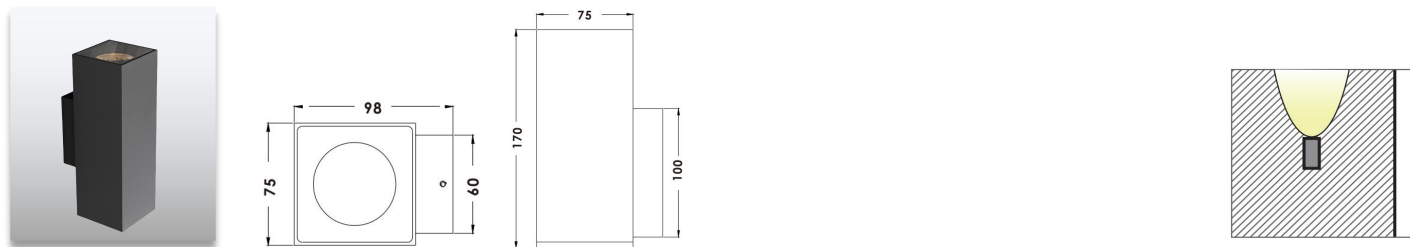


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-1WFL-S3	1*15W	CREE COB	12/24VDC 120-240VAC	10°/18°/22°/30°/60°	1412lm	Single	05	65


# AL-1W Surface Mounted Wall Light

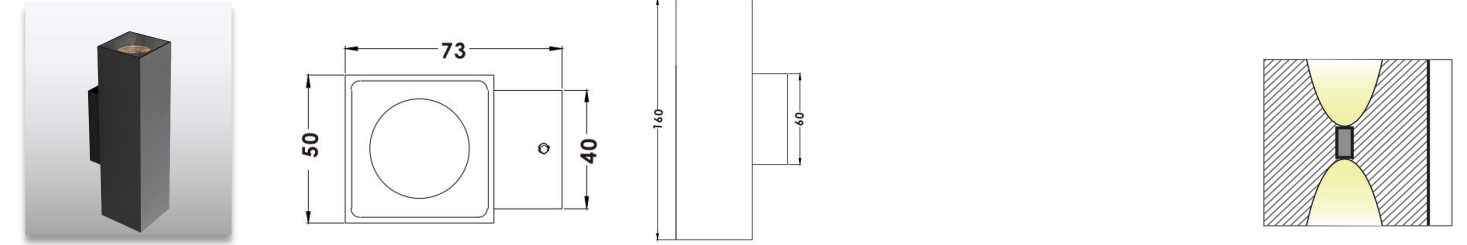

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-1WFB-S1	2*4W	CREE COB	12/24VDC 120-240VAC	10°/18°/22°/30°/60°	2*408lm	Single	05	65

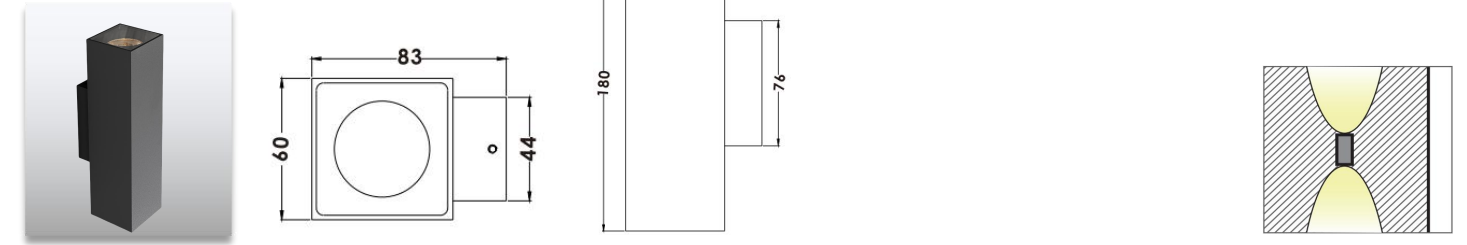


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-1WFB-S2	2*8W	CREE COB	12/24VDC 120-240VAC	10°/18°/22°/30°/60°	2*837lm	Single	05	65

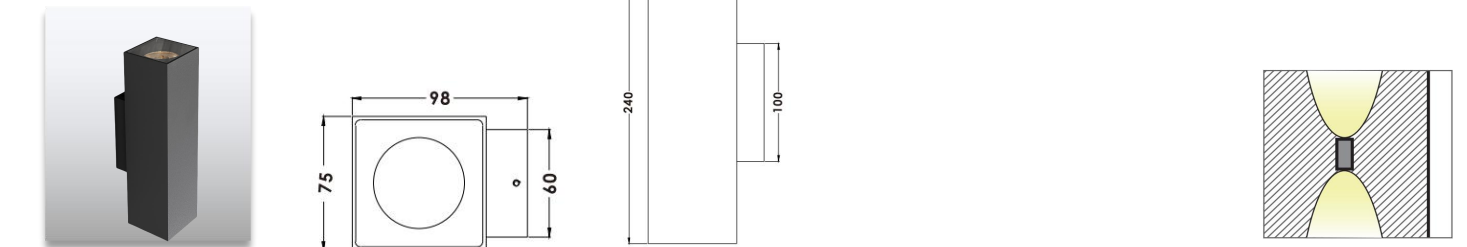


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-1WFB-S3	2*13W	CREE COB	12/24VDC 120-240VAC	10°/18°/22°/30°/60°	2*1082lm	Single	05	65

# AL-1W Surface Mounted Wall Light

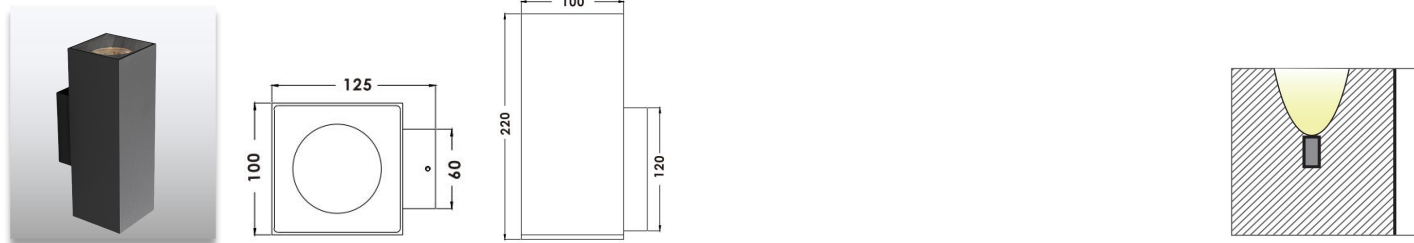

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-1WFL-S4	1*20W	CREE COB	CREE COB	12/24VDC 120-240VAC	212lm	Single	05	65

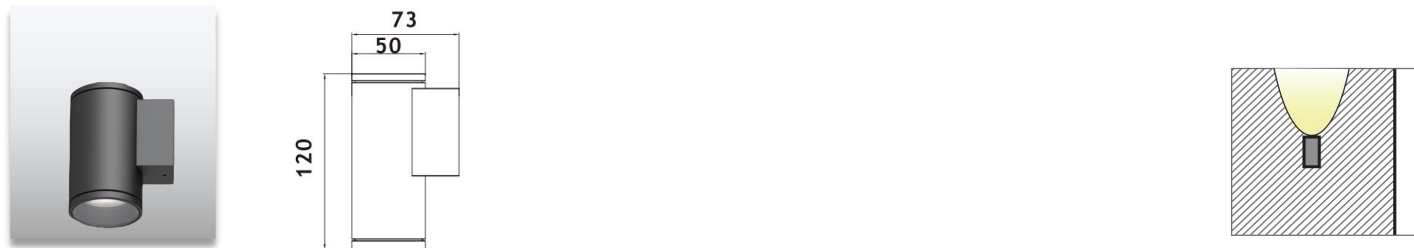


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-1WSL-S1	1*5W	CREE COB	12/24VDC 120-240VAC	10°/18°/22°/30°/60°	408lm	Single	05	65



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-1WSL-S2	1*10W	CREE COB	12/24VDC 120-240VAC	10°/18°/22°/30°/60°	1180lm	Single	05	65

# AL-1W Surface Mounted Wall Light

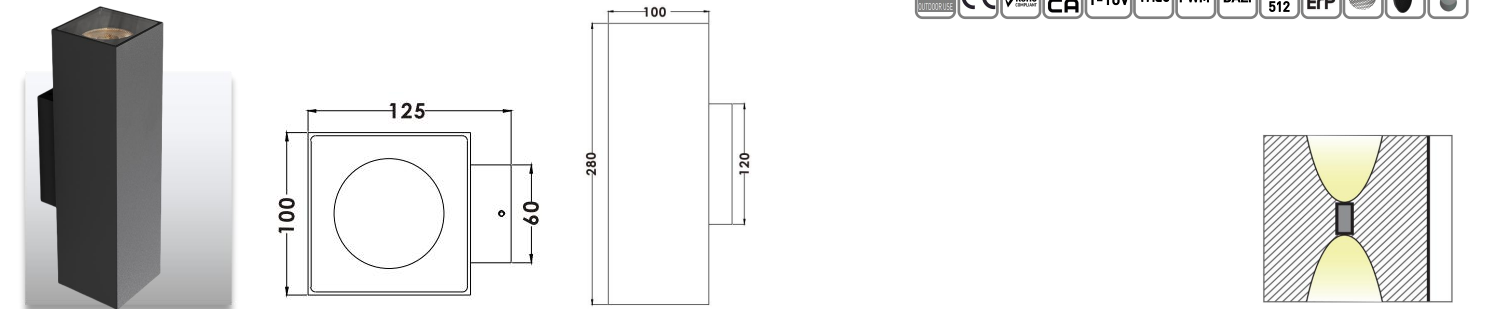

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-1WFB-S4	2*18W	CREE COB	12/24VDC 120-240VAC	10°/18°/22°/30°/60°	2*1788lm	Single	05	65



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-1WSB-S1	2*4W	CREE COB	12/24VDC 120-240VAC	10°/18°/22°/30°/60°	2*408lm	Single	05	65



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-1WSB-S2	2*8W	CREE COB	12/24VDC 120-240VAC	10°/18°/22°/30°/60°	2*837lm	Single	05	65



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-1WSL-S3	1*15W	CREE COB	CREE COB	12/24VDC 120-240VAC	1412lm	Single	05	65



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-1WSL-S4	1*20W	CREE COB	12/24VDC 120-240VAC	10°/18°/22°/30°/60°	2121lm	Single	05	65



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-1WSB-S3	2*13W	CREE COB	12/24VDC 120-240VAC	10°/18°/22°/30°/60°	2*1082lm	Single	05	65



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-1WSB-S4	2*18W	CREE COB	12/24VDC 120-240VAC	10°/18°/22°/30°/60°	2*171lm	Single	05	65

LED Step Lights



**Product Description**


- IP65 for outdoor lighting applications.
- Recessed wall mounting.
- Body in aluminum.
- Finishes in white, black, grey, silver, gold and bespoke color.
- 2700K, 3000K, 4000K, 6000K, RGB 3in1, RGBW 4in1.
- DALI, PWM, 0-10V, Triac dimmable.
- High lumen output COB LED light source.
- 5 years warranty.
- CE, ROHS, UKCA certified.



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-1BQ-R	1*2W	OSRAM	12/24VDC 120-240VAC	80°	60lm	Single	05	65



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-1BQ-S	1*2W	OSRAM	12/24VDC 120-240VAC	80°	60lm	Single	05	65

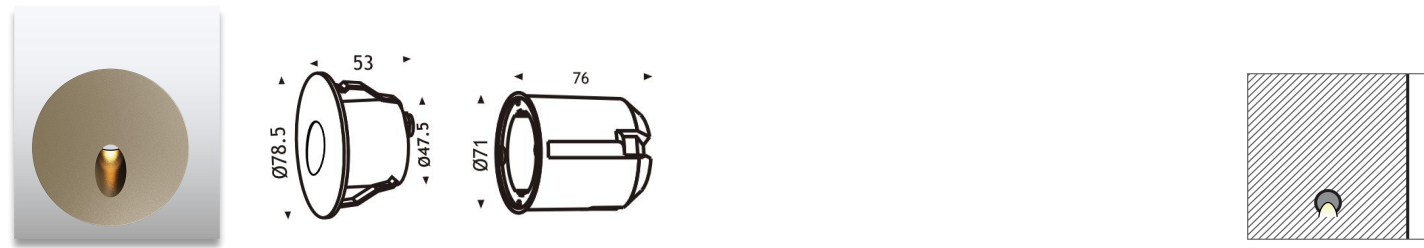

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-1BS-R	1*2W	OSRAM	12/24VDC 120-240VAC	80°	60lm	Single	05	65




Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-1BS-RS	1*2W	OSRAM	12/24VDC 120-240VAC	80°	60lm	Single	05	65




Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-1WDB	1.2W	OSRAM	12/24VDC 120-240VAC	120°	40lm	Single	05	65




Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-1WDC	1.4W	OSRAM	12/24VDC 120-240VAC	120°	40lm	Single	05	65

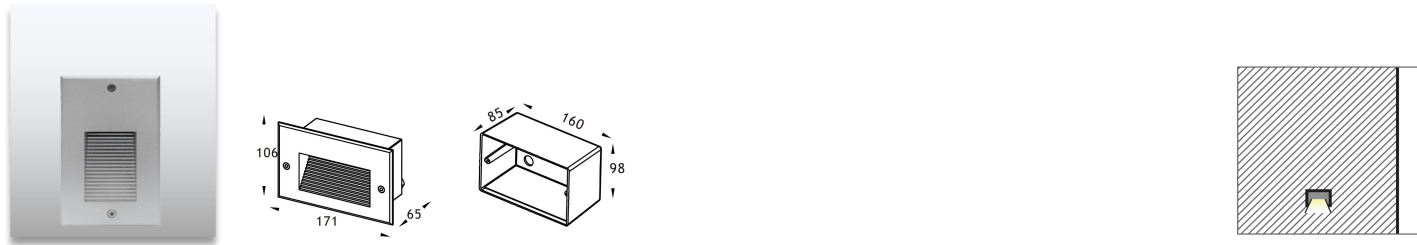

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-1DRA	2.4W	OSRAM	12/24VDC 120-240VAC	120°	47lm	Single	05	65
	6W	OSRAM			132lm	Single		

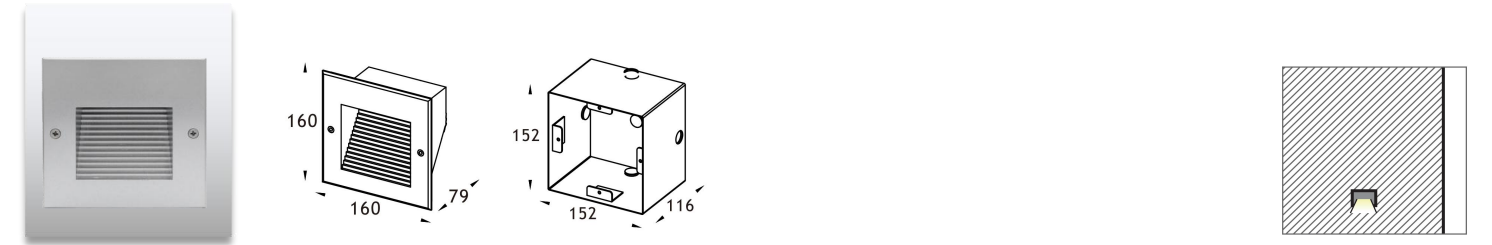


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-1DSB	3W	OSRAM	12/24VDC 120-240VAC	120°	75lm	Single	05	65
	6W	OSRAM			220lm	Single		

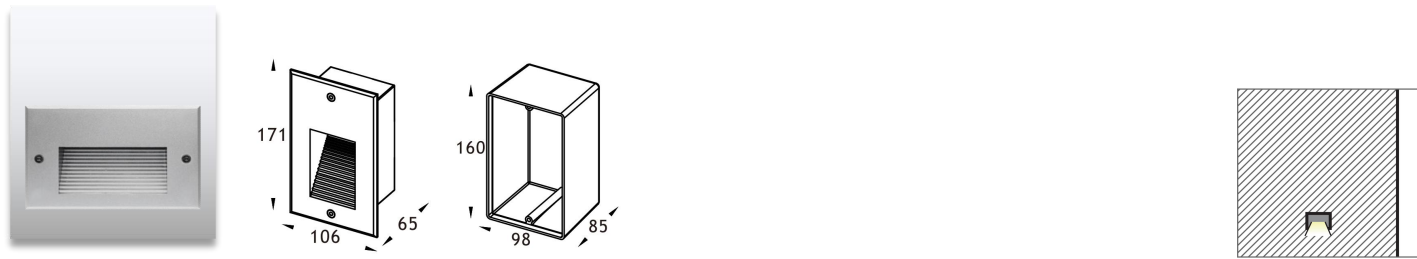

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-1DRB	1.4W	OSRAM	12/24VDC 120-240VAC	120°	35lm	Single	05	65
	3W	OSRAM			55lm	Single		




Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-1WDA	1.2W	OSRAM	12/24VDC 120-240VAC	120°	40lm	Single	05	65
						Single		

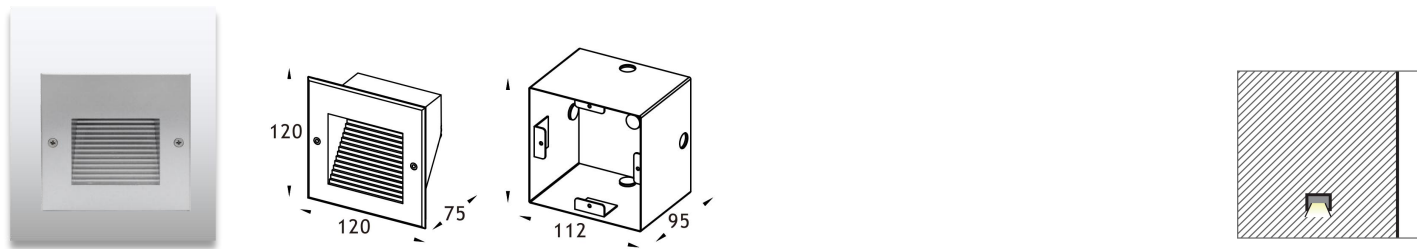

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-1DSA	1.6W	OSRAM	12/24VDC 120-240VAC	120°	35lm	Single	05	65
	3W	OSRAM			132lm	Single		

LED Window Light



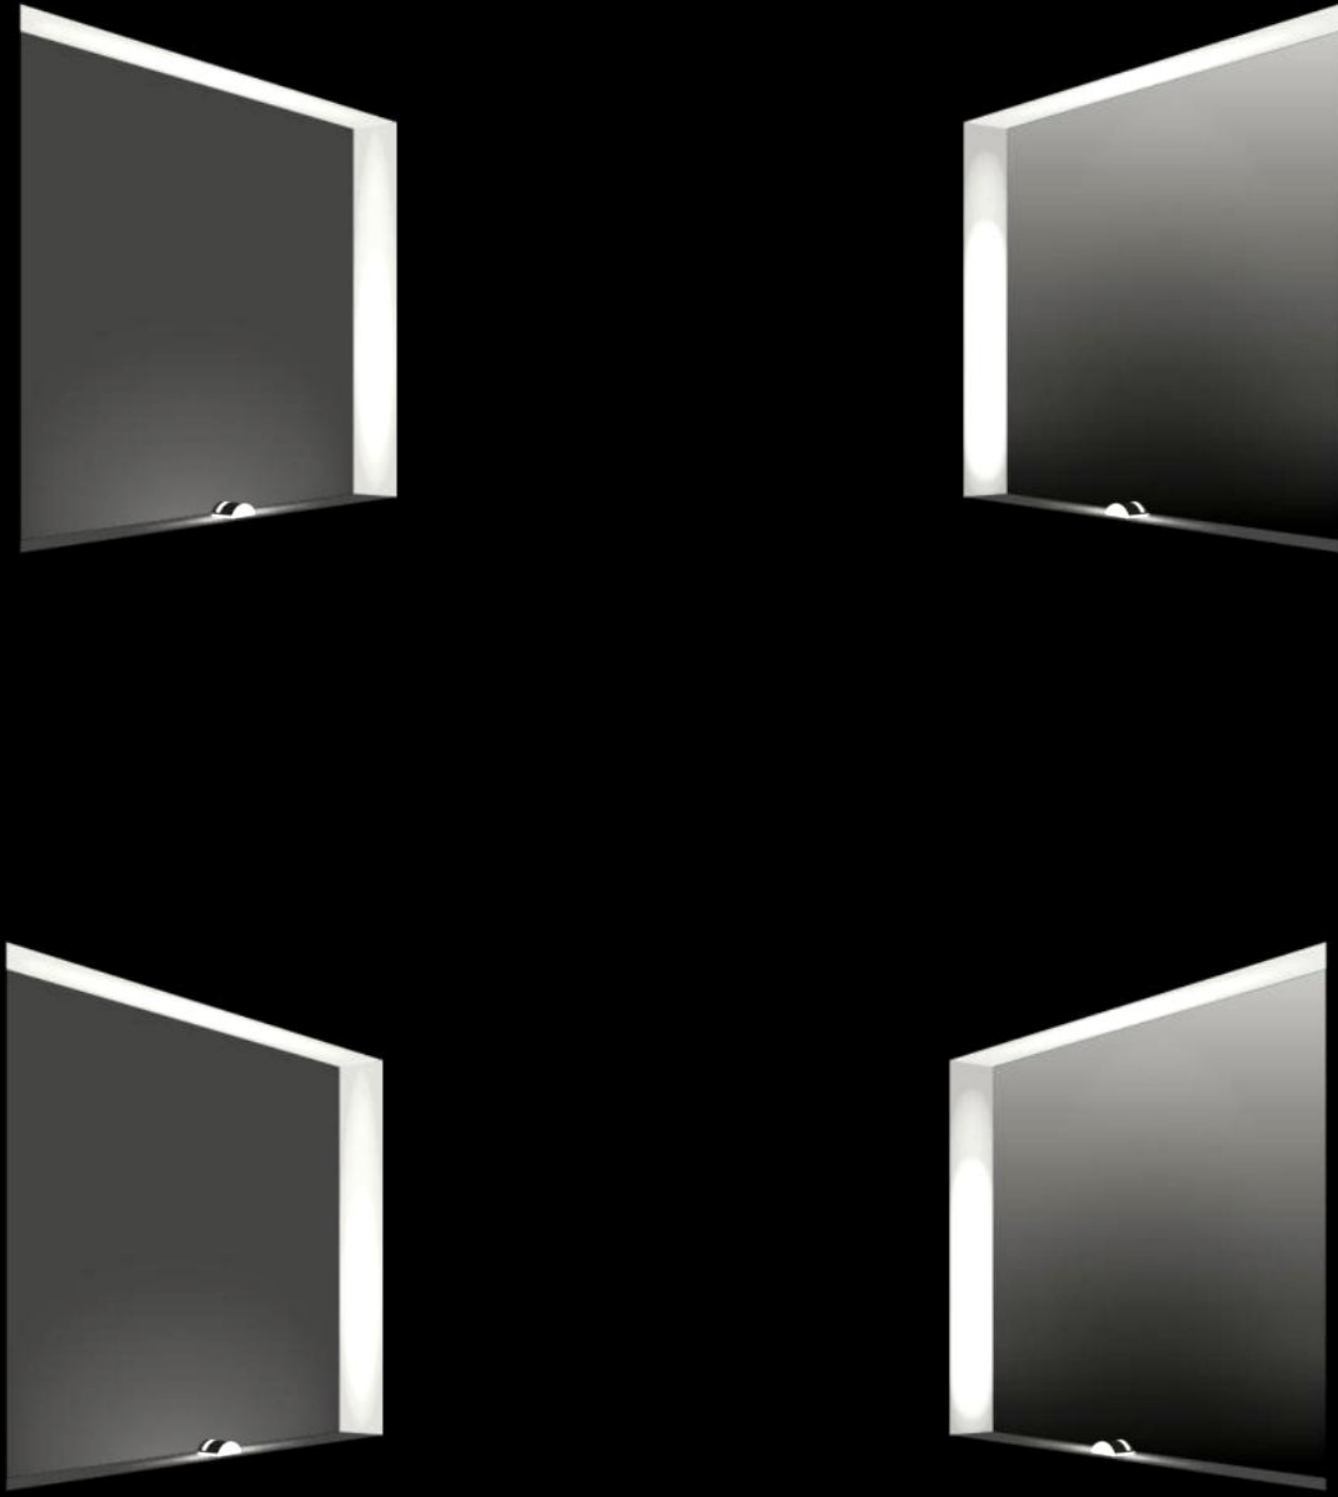


Product Description

- IP65 for outdoor lighting applications.
- Body in die-casting aluminum with powder coating.
- Finishes in black, white and bespoke color.
- 2700K, 3000K, 4000K, 6000K, RGB 3in1, RGBW 4in1.
- DMX512, DALI, 0-10V, Triac, PWM dimmable.
- 5 years warranty.
- CE, ROHS, UKCA certified.



# LED Handrail Light

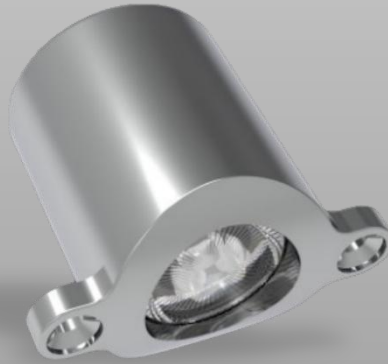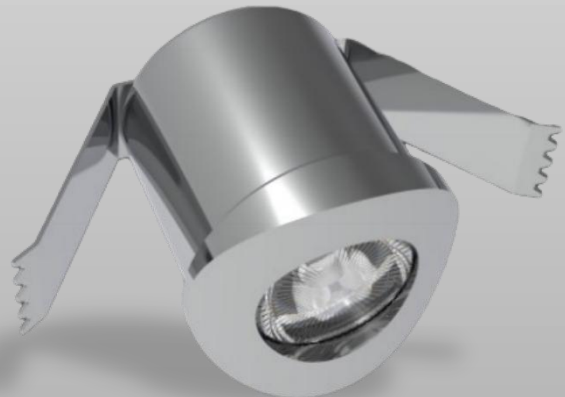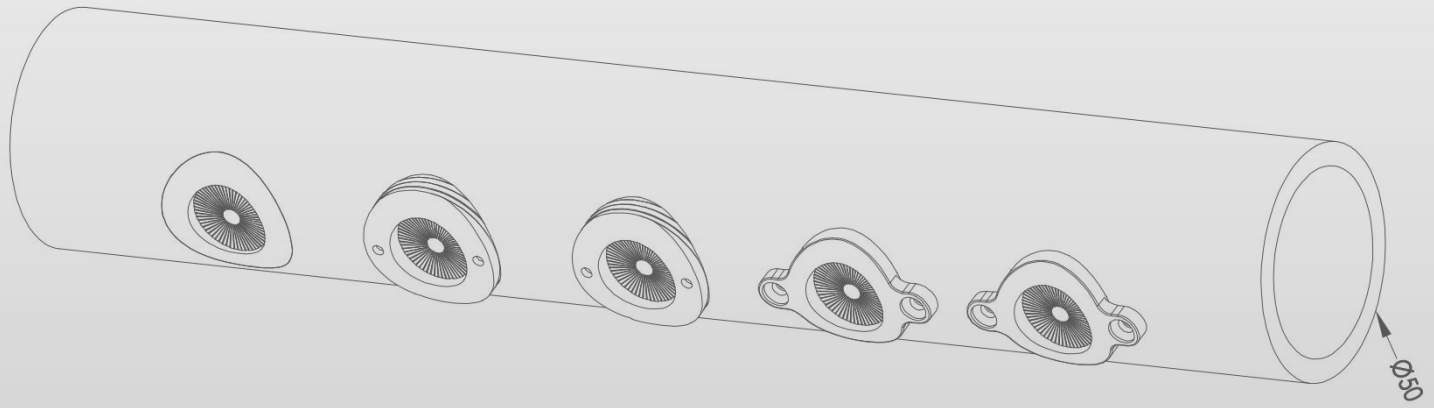


## Product Description


- IP65 for outdoor handrail staircase or stairway lighting applications.
- Recessed handrail mounting.
- High lumen output.
- 5 years warranty.
- CE, ROHS, UKCA certified.




# LED Window Light

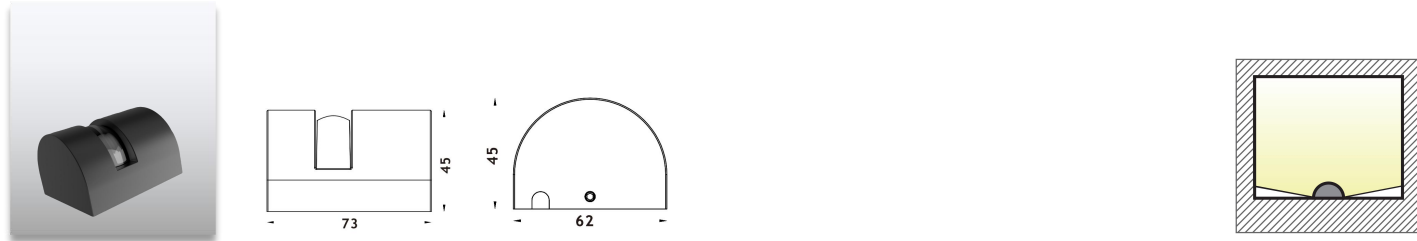

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-1WOL-S1	1*3W	CREE/OSRAM	12/24VDC 120-240VAC	3*180°	171lm	Single	05	65
	3*2W	CREE/OSRAM			321lm	Single		

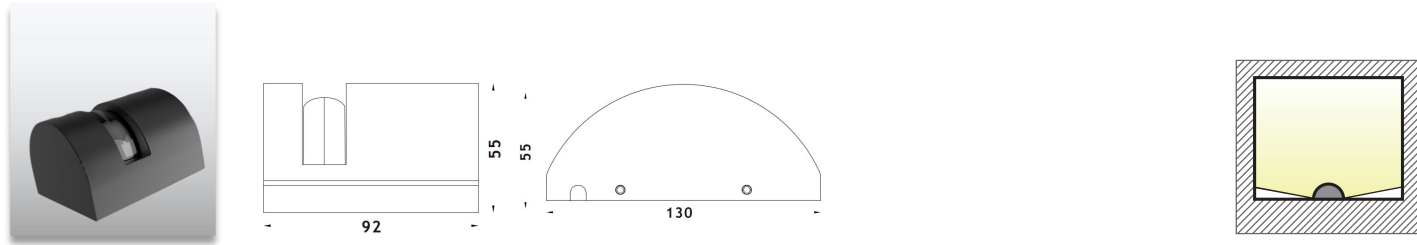


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-1WOL-S2	6*2W	CREE/OSRAM	12/24VDC 120-240VAC	3*180°	660lm	Single	05	65
						Single		

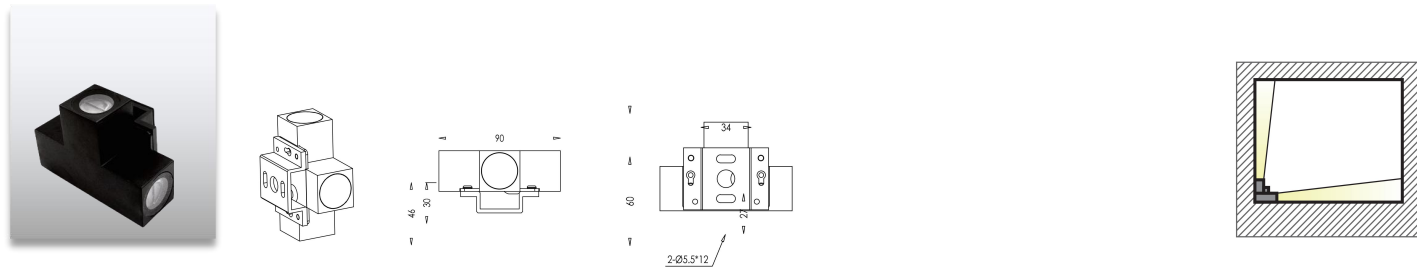

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-1WOL-S3	3*2W	CREE/OSRAM	12/24VDC 120-240VAC	15°/25°	400lm	Single	05	65


# LED Handrail Light




Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-1HRA	1*1.5W	CREE/OSRAM	12/24VDC 120-240VAC	15°/30°40°/60°/90°	120lm	Single	05	65
	1*1.5W	CREE/OSRAM		Asymmetrical Lens		Single		



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-1HRB	1*1.5W	CREE/OSRAM	12/24VDC 120-240VAC	15°/30°40°/60°/90°	120lm	Single	05	65
	1*1.5W	CREE/OSRAM		Asymmetrical Lens		Single		

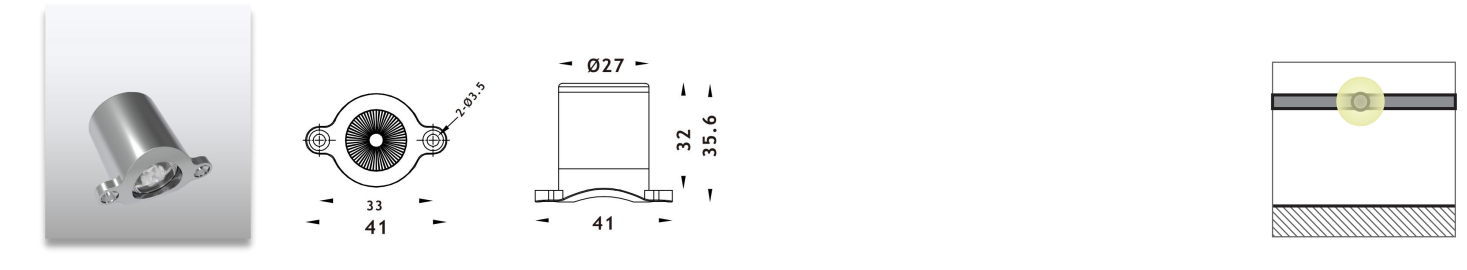


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-1HRC	1*1.5W	CREE/OSRAM	12/24VDC 120-240VAC	15°/30°40°/60°/90°	120lm	Single	05	65
	1*1.5W	CREE/OSRAM		Asymmetrical Lens		Single		

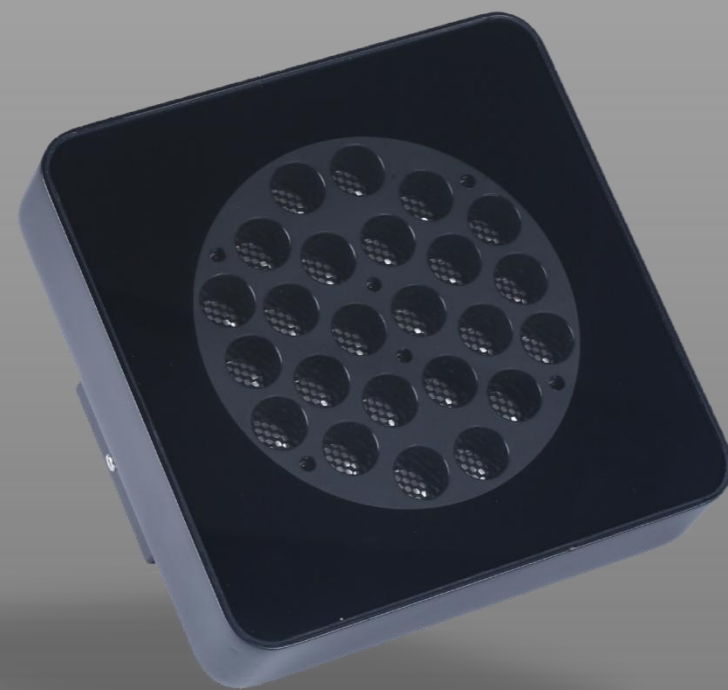


#### Product Description


- IP66 for outdoor ceiling lighting applications.
- Body in die-casting aluminum with powder coating.
- Surface or recessed ceiling mounted.
- Finishes in grey, white, black or bespoke color.
- 2700K, 3000K, 4000K, 6000K, RGB 3in1, RGBW 4in1.
- DALI, PWM, 0-10V, Triac dimmable.
- Round and square shape.
- High lumen output COB LED light source.
- 5 years warranty.

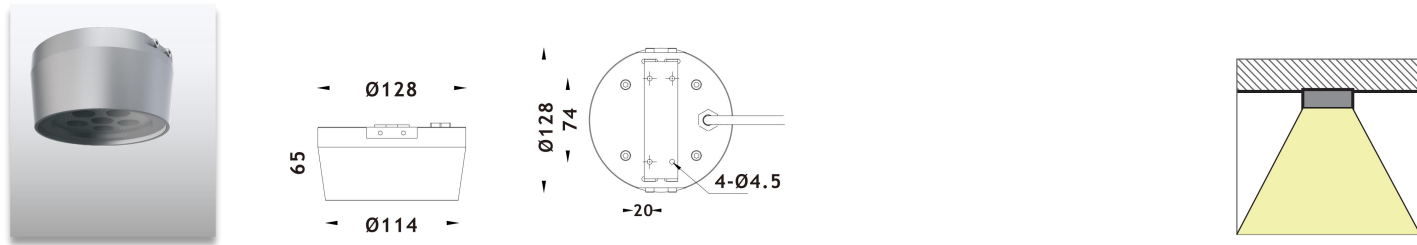


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-7VRA	6*2.5W	CREE/OSRAM	12/24VDC 120-240VAC	5°/10°/30°/40°/60°/90°	900lm	Single	05	65
	1*15W	CREE COB		15°/24°/36°/60°	1200lm	Single		

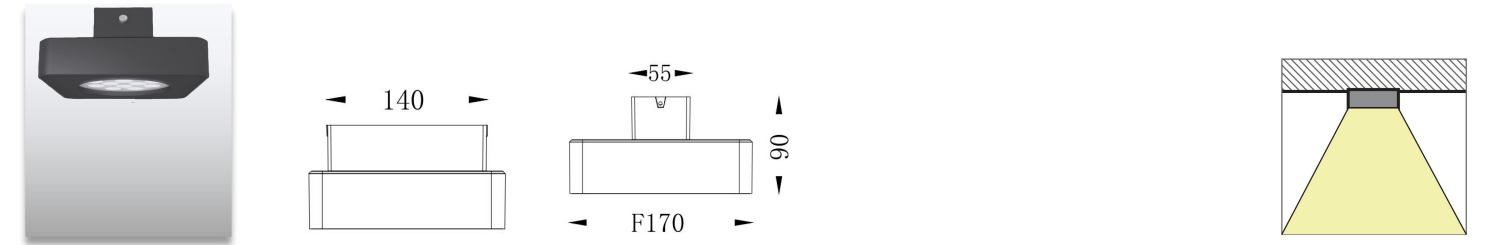


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-7VSA	12*2W	CREE/OSRAM	12/24VDC 120-240VAC	15°/25°/40°/60°/90°	1920lm	Single	05	65
	2*12W	CREE COB		20°/36°/60°	2400lm	Single		

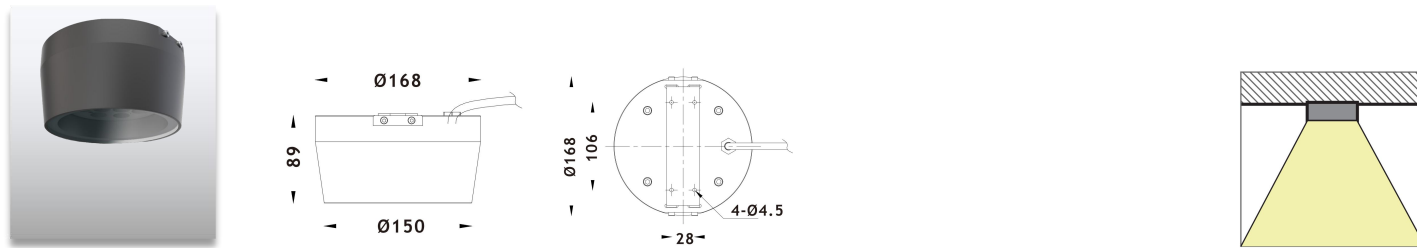


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-7VRB	12*2.5W	CREE/OSRAM	12/24VDC 120-240VAC	5°/10°/30°/40°/60°/90°	2100lm	Single	05	65
	1*30W	CREE COB		15°/24°/36°/60°	3000lm	Single		

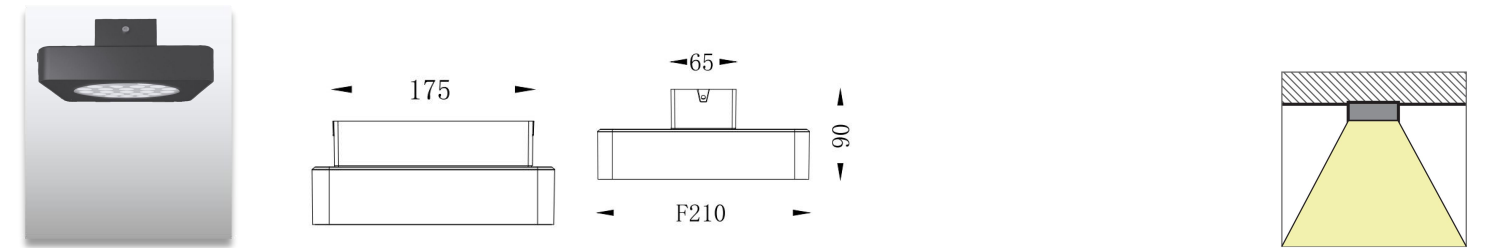

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-7VSB	24*1.5W	CREE/OSRAM	12/24VDC 120-240VAC	15°/25°/40°/60°/90°	3200lm	Single	05	65
	4*10W	CREE COB		20°/36°/60°	3600lm	Single		

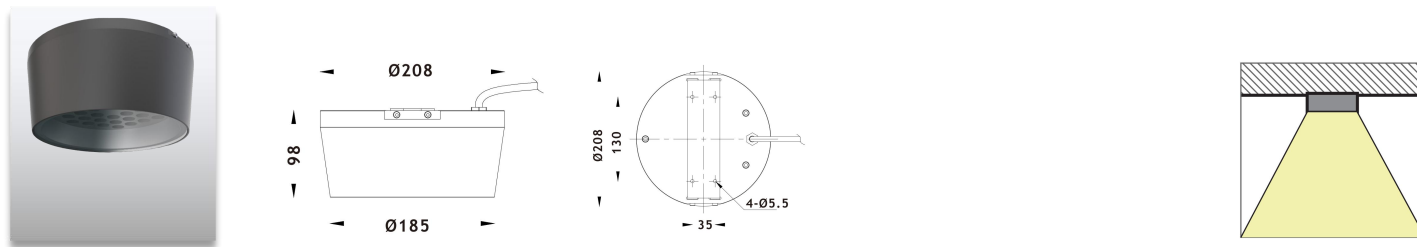

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-7VRC	24*2W	CREE/OSRAM	12/24VDC 120-240VAC	5°/10°/30°/40°/60°/90°	3080lm	Single	05	65
	4*12W	CREE COB		15°/24°/36°/60°	4050lm	Single		

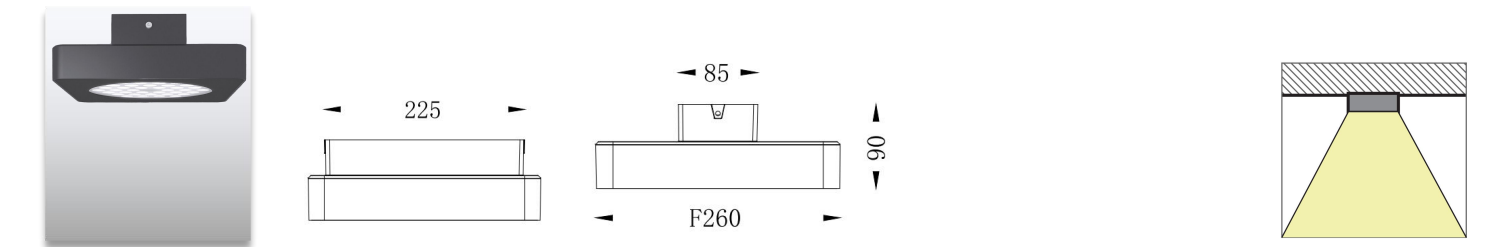

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-7VSC	36*1.5W	CREE/OSRAM	12/24VDC 120-240VAC	15°/25°/40°/60°/90°	4320lm	Single	05	65
	4*13W	CREE COB		20°/36°/60°	5670lm	Single		



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-7WSL-S1	1*5W	CREE COB	12/24VDC 120-240VAC	10°	408lm	Single	05	65
	1*5W	CREE COB		18°/22°/31°/58°	408lm	Single		



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-7WSL-S4	1*20W	CREE COB	12/24VDC 120-240VAC	10°	2121lm	Single	05	65
	1*20W	CREE COB		18°/22°/31°/58°	2121lm	Single		



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-7WSL-S2	1*10W	CREE COB	12/24VDC 120-240VAC	10°	1180lm	Single	05	65
	1*10W	CREE COB		18°/22°/31°/58°	1180lm	Single		



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-7WSL-S5	1*35W	CREE COB	12/24VDC 120-240VAC	10°	2905lm	Single	05	65
	1*35W	CREE COB		18°/22°/31°/58°	2905lm	Single		



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-7WSL-S2	1*15W	CREE COB	12/24VDC 120-240VAC	10°	1412lm	Single	05	65
	1*15W	CREE COB		18°/22°/31°/58°	1412lm	Single		



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-7WFL-S1	1*5W	CREE COB	12/24VDC 120-240VAC	10°	408lm	Single	05	65
	1*5W	CREE COB		18°/22°/31°/58°	408lm	Single		



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-7WFL-S4	1*20W	CREE COB	12/24VDC 120-240VAC	10°	2121lm	Single	05	65
	1*20W	CREE COB		18°/22°/31°/58°	2121lm	Single		



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-7WFL-S2	1*10W	CREE COB	12/24VDC 120-240VAC	10°	1180lm	Single	05	65
	1*10W	CREE COB		18°/22°/31°/58°	1180lm	Single		



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-7WFL-S5	1*35W	CREE COB	12/24VDC 120-240VAC	10°	2905lm	Single	05	65
	1*35W	CREE COB		18°/22°/31°/58°	2905lm	Single		



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-7WFL-S3	1*15W	CREE COB	12/24VDC 120-240VAC	10°	1412lm	Single	05	65
	1*15W	CREE COB		18°/22°/31°/58°	1412lm	Single		



#### Product Description

- IP67 for outdoor ceiling lighting applications.
- Body in die-casting aluminum with powder coating.
- Surface or recessed ceiling mounted.
- Finishes in grey, white, black or bespoke color.
- 2700K, 3000K, 4000K, 6000K, RGB 3in1, RGBW 4in1.
- DALI, PWM, 0-10V, Triac dimmable.
- High lumen output COB LED light source.
- 5 years warranty.


# LED Recessed Ceiling Light



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-7AA-S1	1*2W	CREE/OSRAM	12/24VDC 120-240VAC	5°/8°/15°/25°/40°/60°	157lm	Single	05	67
	1*3W	OSRAM	12/24VDC	12°/25°/40°/60°	157lm	RGB 3in1		
	1*4W	OSRAM	12/24VDC	12°/25°/40°/60°	157lm	RGBW 4in1		



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-7AA-S2	2*3W	CREE	12/24VDC 120-240VAC	3°/8°	465lm	Single	08	67
	3*2W	CREE/OSRAM	12/24VDC 120-240VAC	15°/25°/40°/60°	465lm	Single		
	1*6W	CREE COB	12/24VDC 120-240VAC	18°/24°/38°/60°	465lm	Single		
	2*3W	OSRAM	12/24VDC	15°/25°/40°/60°	465lm	RGB 3in1		
	2*4W	OSRAM	12/24VDC	15°/25°/40°/60°	465lm	RGBW 4in1		

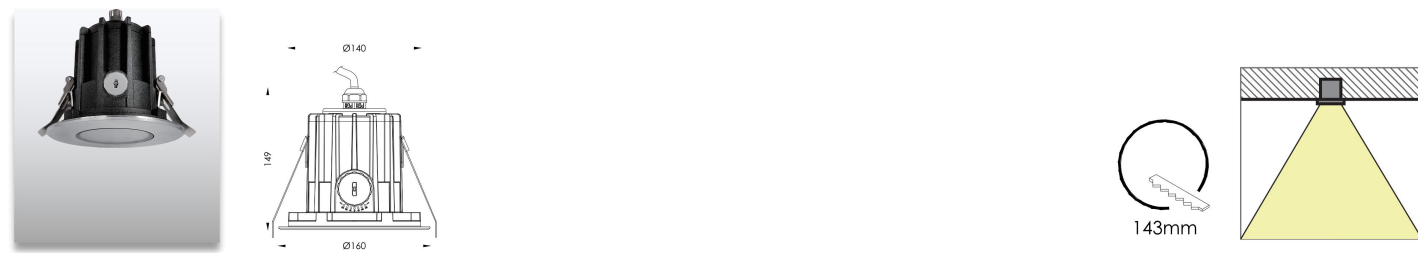

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-7AA-S3	4*3W	CREE	12/24VDC 120-240VAC	3°/8°	920lm	Single	08	67
	6*2W	CREE/OSRAM	12/24VDC 120-240VAC	15°/25°/40°/60°	920lm	Single		
	1*12W	CREE COB	12/24VDC 120-240VAC	18°/24°/38°/60°	920lm	Single		
	4*2.5W	OSRAM	12/24VDC	15°/25°/40°/60°	920lm	RGB 3in1		
	4*3.5W	OSRAM	12/24VDC	15°/25°/40°/60°	920lm	RGBW 4in1		

# LED Recessed Ceiling Light



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-7AA-S4	6*3W	CREE	12/24VDC 120-240VAC	3°/8°	1310lm	Single	08	67
	9*2W	CREE/OSRAM	12/24VDC 120-240VAC	15°/25°/40°/60°	1310lm	Single		
	1*20W	CREE COB	12/24VDC 120-240VAC	18°/24°/38°/60°	1245lm	Single		
	6*2.5W	OSRAM	12/24VDC	15°/25°/40°/60°	425lm	RGB 3in1		
	6*3.5W	OSRAM	12/24VDC	15°/25°/40°/60°	568lm	RGBW 4in1		



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-7AA-S5	9*3W	CREE	12/24VDC 120-240VAC	3°/8°	1800lm	Single	10	67
	12*2W	CREE/OSRAM	12/24VDC 120-240VAC	15°/25°/40°/60°	1800lm	Single		
	1*25W	CREE COB	12/24VDC 120-240VAC	18°/24°/38°/60°	1800lm	Single		
	9*2.5W	OSRAM	12/24VDC	15°/25°/40°/60°	1800lm	RGB 3in1		
	9*3.5W	OSRAM	12/24VDC	15°/25°/40°/60°	1800lm	RGBW 4in1		




Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-7W	1*2W	CREE/OSRAM	12/24VDC 120-240VAC	8°/12°/25°/40°/60°	170lm	Single	08	67
	1*3W	OSRAM	12/24VDC	10°/45°/25°/45°	75lm	RGB 3in1		
	1*4W	OSRAM	12/24VDC	10°/45°/25°/45°	100lm	RGBW 4in1		



**Product Description**


- Submersible in-grade underwater lights.
- IP68 for underwater lighting applications.
- Recessed mounted.
- RGBW 4in1 DMX512, DALI dimmable.
- Body and in SUS 316L stainless steel.
- Buried bucket in SUS 316 stainless steel.
- High lumen output COB LED and high-power LED light source.
- With overheat sensor protection.
- IK08 impact resistance.
- Pre-wired with 3 meters of power cable.
- 5 years warranty.
- CE, ROHS, UKCA certified.

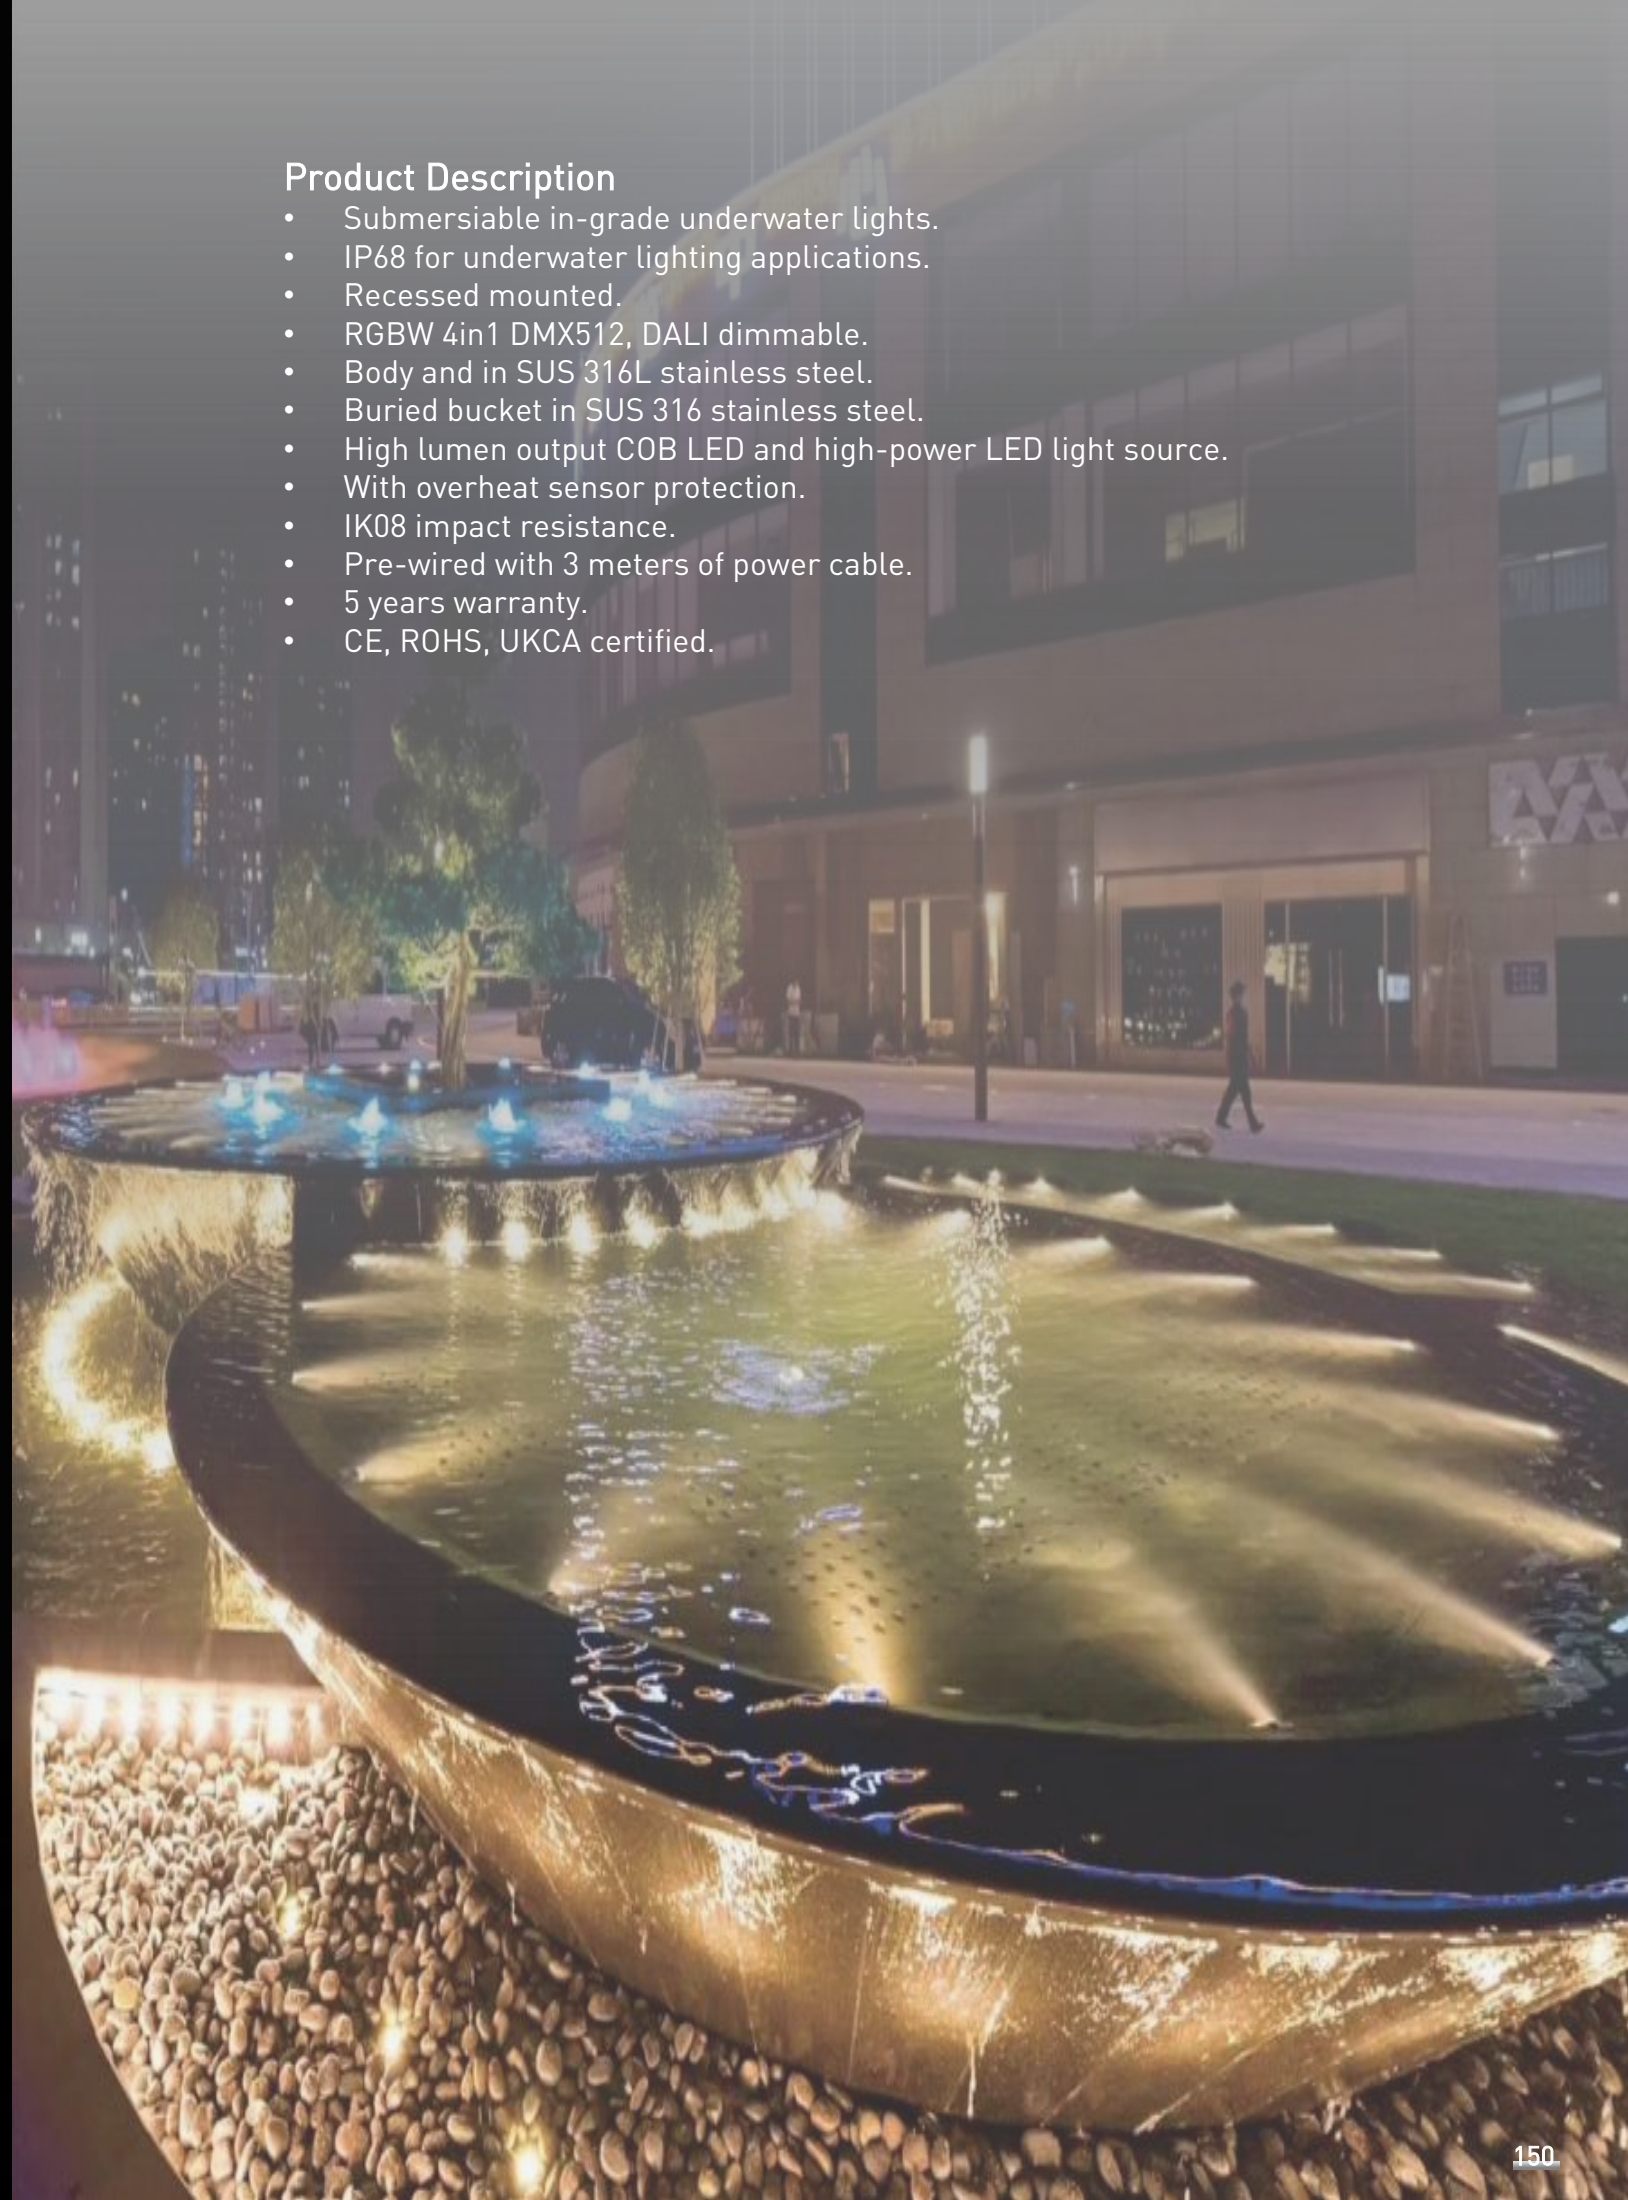


# AL-4K-R COB LED Underwater Light



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-4KA-R	1*8W	CREE COB	12/24VDC	15°/24°/36°	400lm	Single	08	68

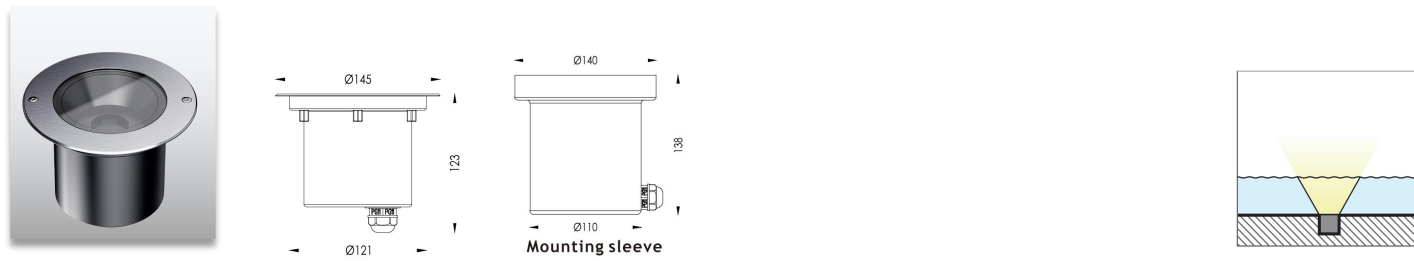


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-4KB-R	1*18W	CREE COB	12/24VDC	15°/24°/36°/60°	1440lm	Single	08	68

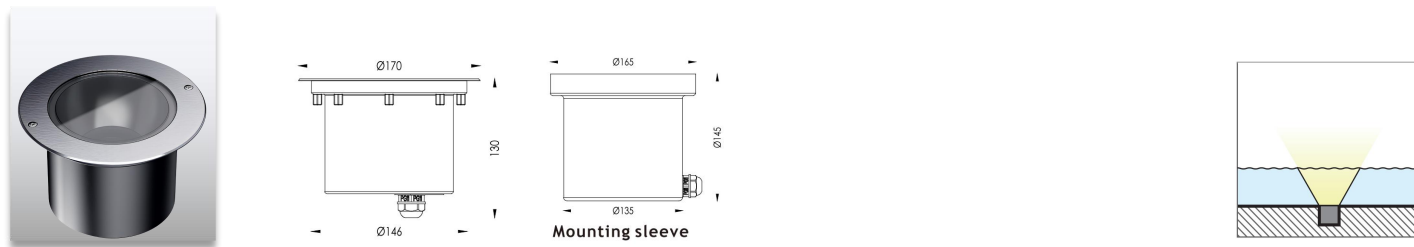


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-4KC-R	1*25W	CREE COB	12/24VDC	15°/24°/36°/60°	2000lm	Single	08	68


# AL-4K-B High Power LED Underwater Light

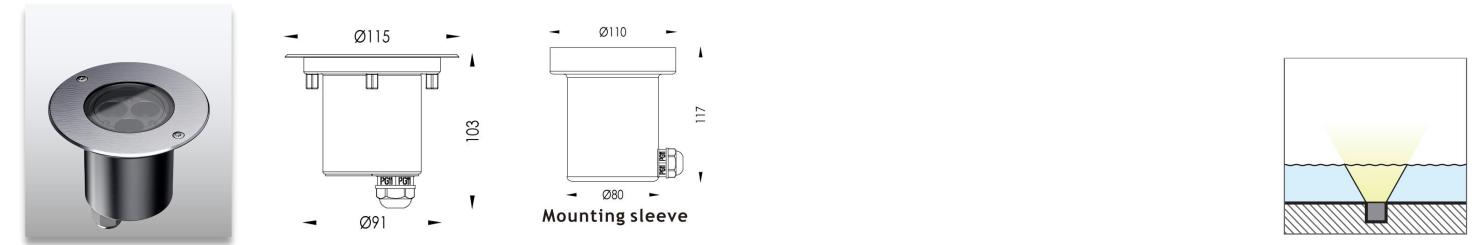

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-4KA-B	3*3W	CREE/OSRAM	12/24VDC	5°/10°/25°/40°/60°/80°	769lm	Single RGB 3in1 RGBW 4in1	08	68
	3*3W	OSRAM	12/24VDC	10°/45°/25°/45°	200lm			
	3*3W	OSRAM	12/24VDC	12°/25°/40°/60°/10°/45°	260lm			

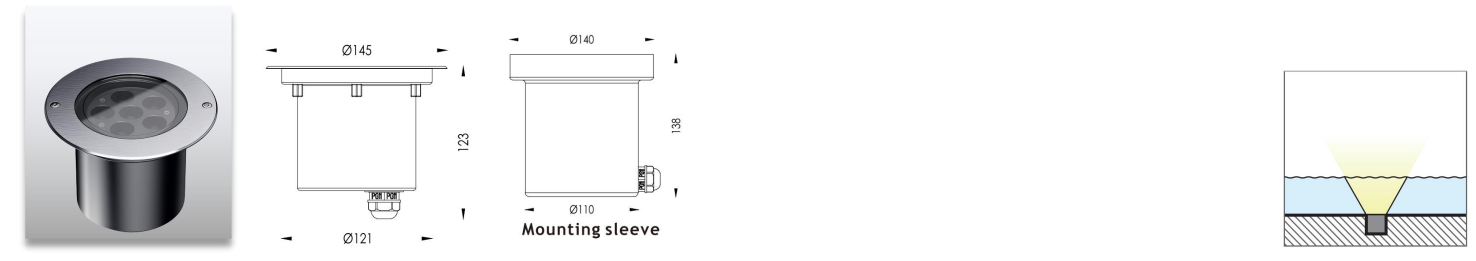


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-4KB-B	6*3W	CREE/OSRAM	12/24VDC	5°/10°/25°/40°/60°/80°	1440lm	Single RGB 3in1 RGBW 4in1	08	68
	6*3W	OSRAM	12/24VDC	10°/45°/25°/45°	450lm			
	6*3.5W	OSRAM	12/24VDC	12°/25°/40°/60°/10°/45°	630lm			

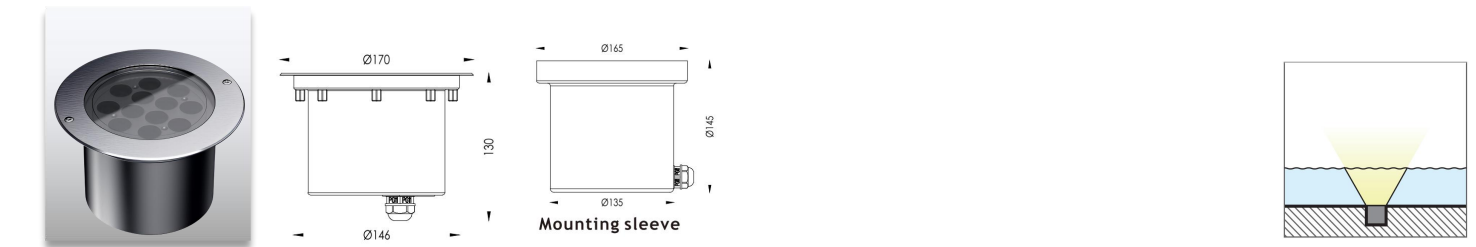


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-4KC-B	12*3W	CREE/OSRAM	12/24VDC	5°/10°/25°/40°/60°/80°	2800lm	Single RGB 3in1 RGBW 4in1	08	68
	12*3W	OSRAM	12/24VDC	10°/45°/25°/45°	900lm			
	12*3.5W	OSRAM	12/24VDC	12°/25°/40°/60°/10°/45°	1260lm			

## AL-B4 Recessed LED Underwater Light

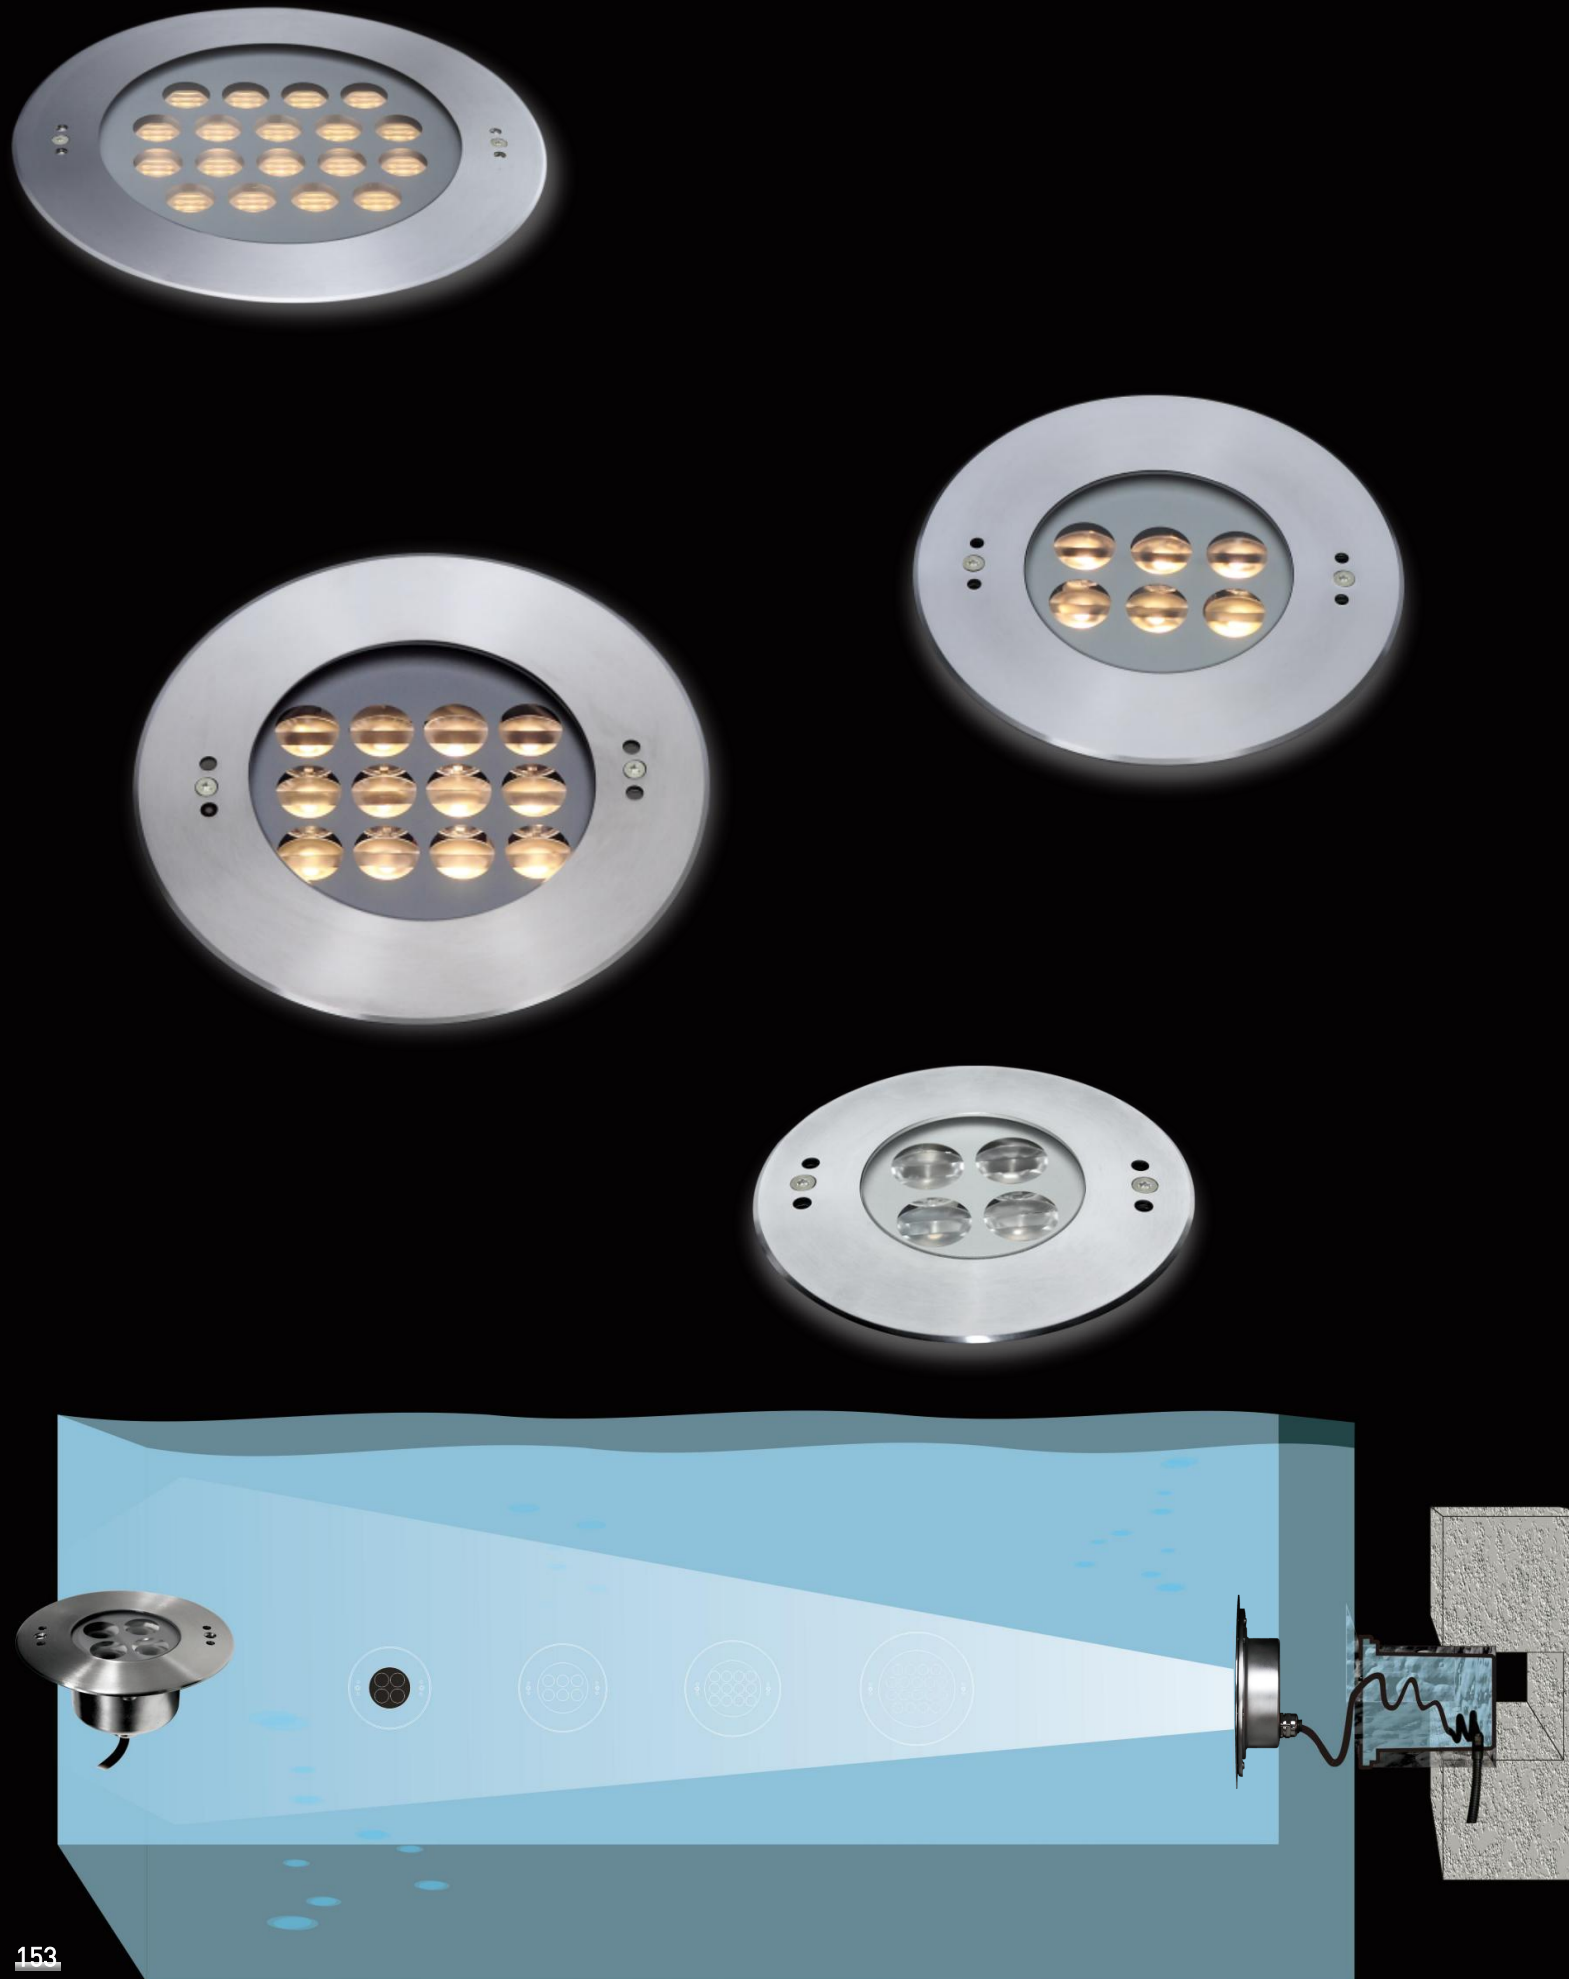


### Product Description

- Submersible in-grade underwater lights.
- IP68 for underwater lighting applications.
- Recessed mounted.
- RGBW 4in1 DMX512, DALI dimmable.
- Body and in SUS 316L stainless steel.
- Buried bucket in ABS.
- High lumen output COB LED and high-power LED light source.
- With overheat sensor protection.
- IK08 impact resistance.
- Pre-wired with 3 meters of power cable.
- 5 years warranty.
- CE, ROHS, UKCA certified.

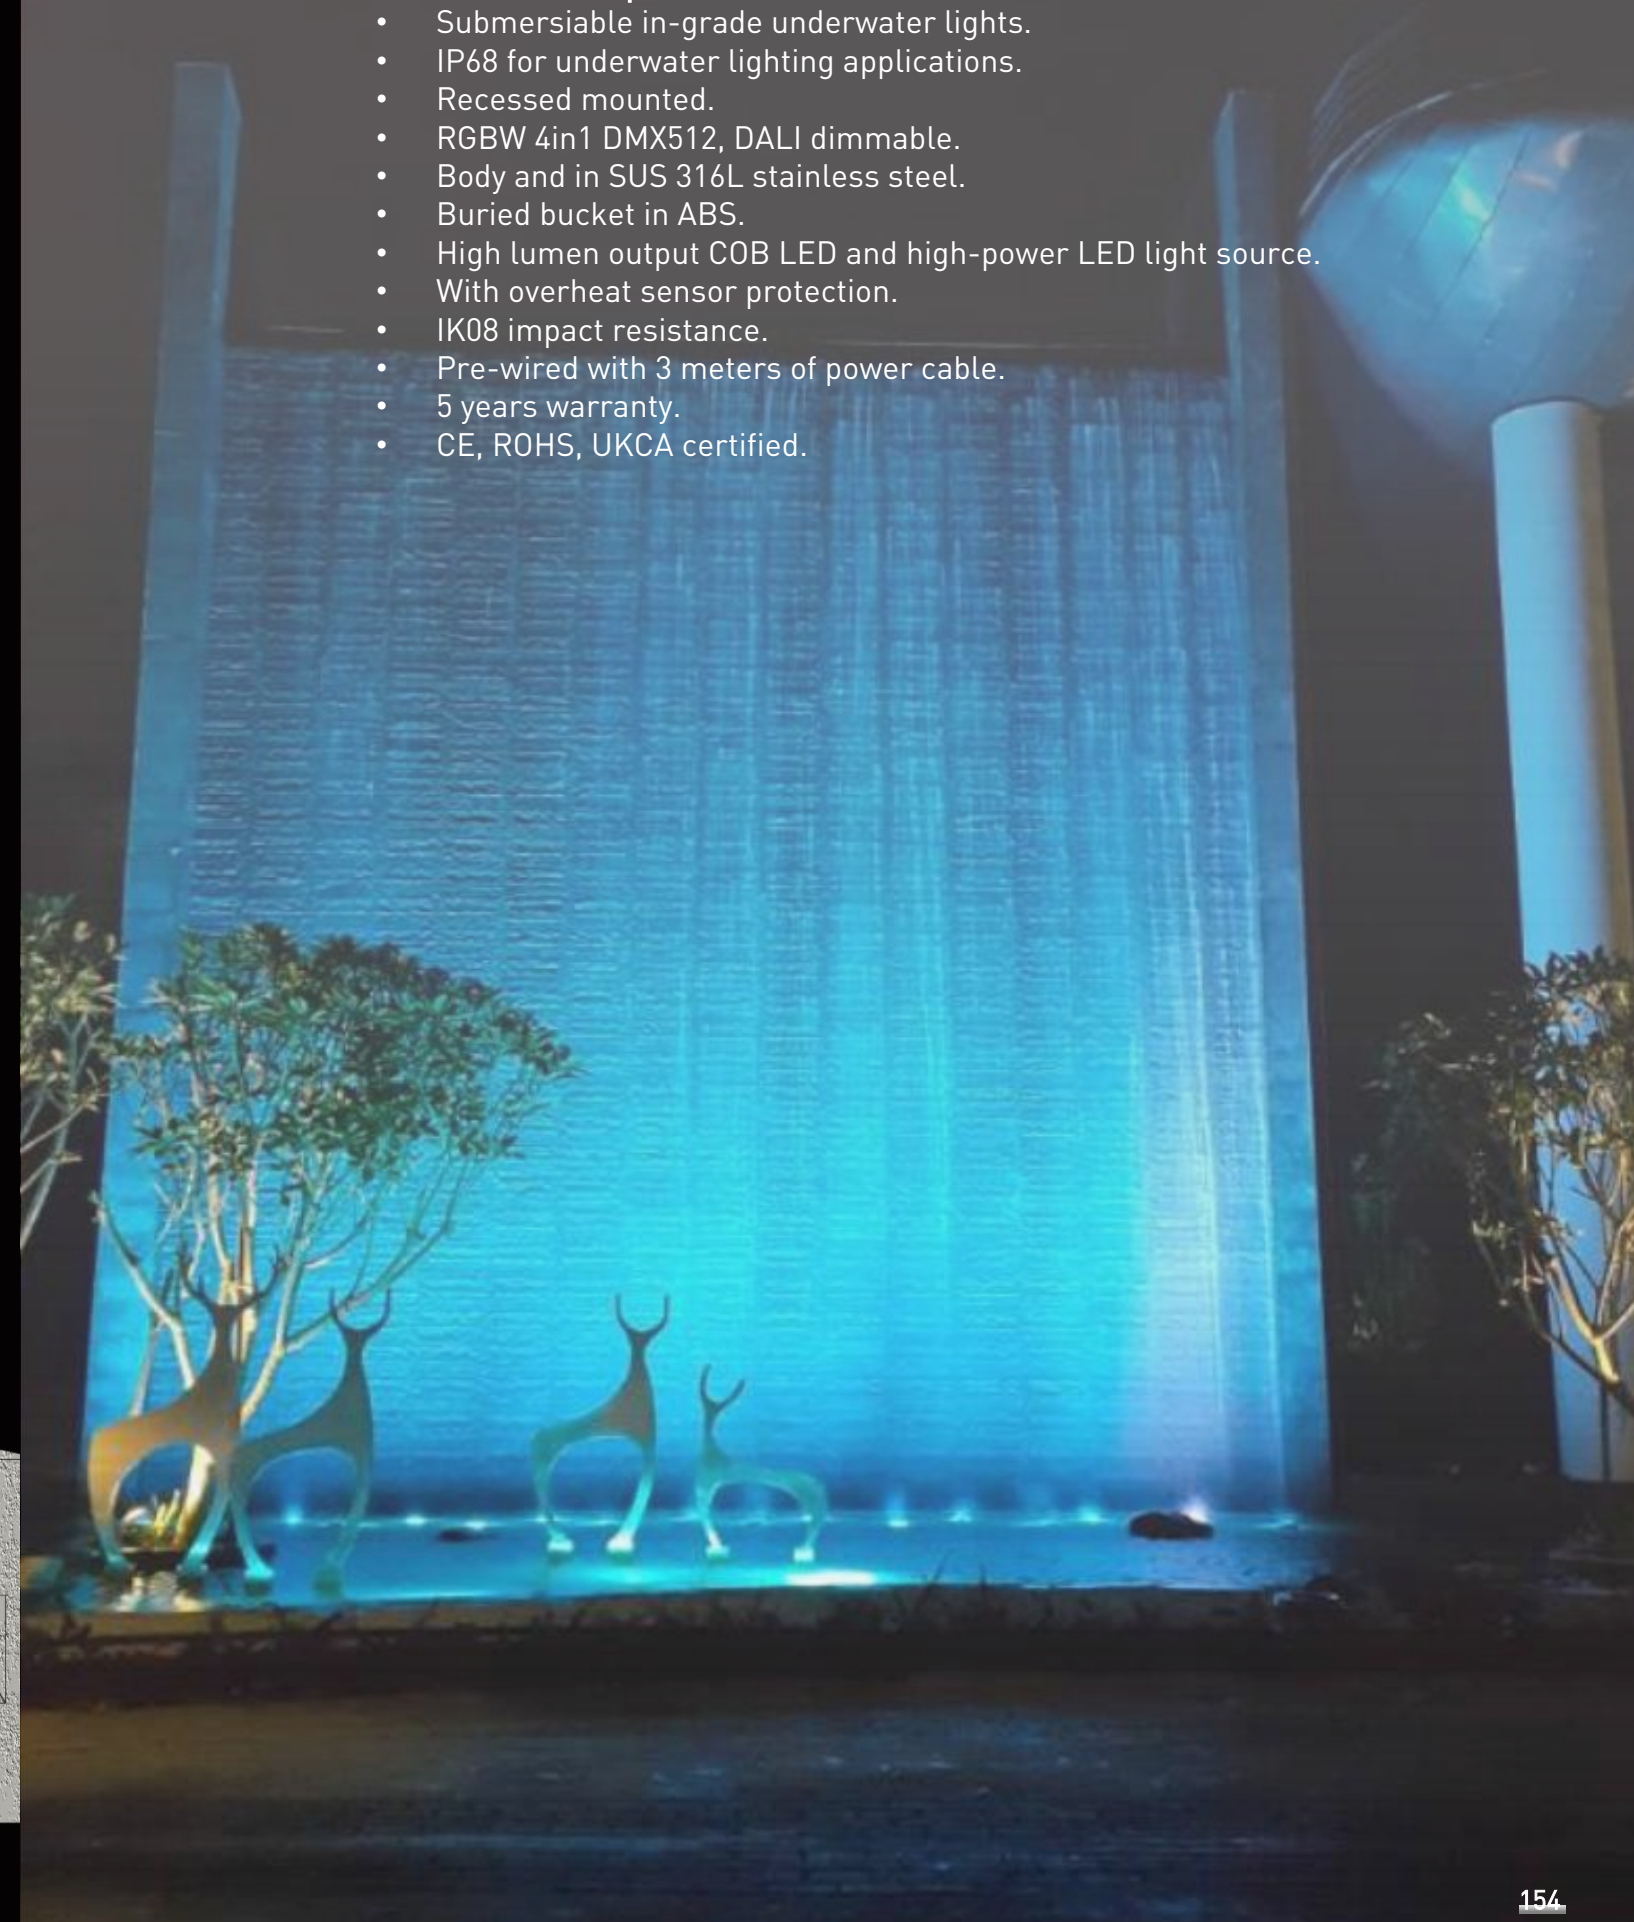

# AL-B4 Recessed Underwater Light

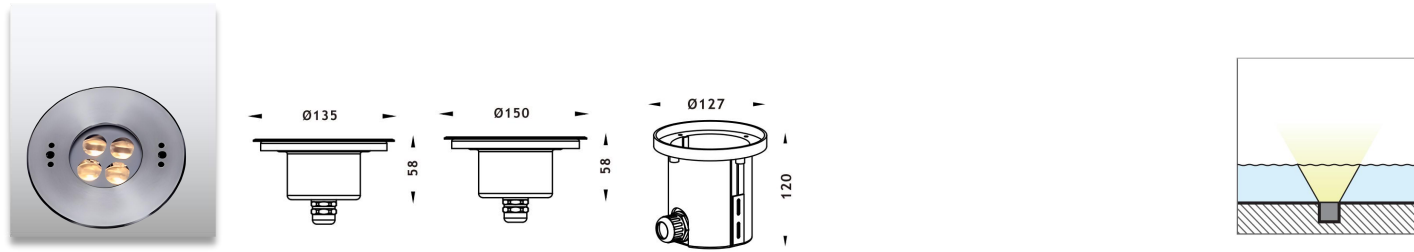


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-B4XA	1*8W	CREE COB	12/24VDC	15°/25°/36°/60°	780lm	Single	08	68
	4*2W	CREE/OSRAM		15°/25°/36°/60°/100°	660lm	Single		
	4*2W	CREE/OSRAM		Asymmetrical 25°/45°	660lm	Single		
	4*3W	OSRAM		25°/40°/60°	300lm	RGB 3in1		
	4*3W	OSRAM		25°/40°/60°	420lm	RGBW 4in1		


# AL-B4 Recessed Underwater Light




Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-B4ZB	1*24W	CREE COB	12/24VDC	15°/25°/36°/60°	2300lm	Single	10	68
	12*2W	CREE/OSRAM		10°/25°/40°/60°	2000lm	Single		
	12*2W	CREE/OSRAM		Asymmetrical 25°/45°	2000lm	Single		
	12*3W	OSRAM		25°/40°/60°	960lm	RGB 3in1		
	12*3W	OSRAM		25°/40°/60°	1350lm	RGBW 4in1		

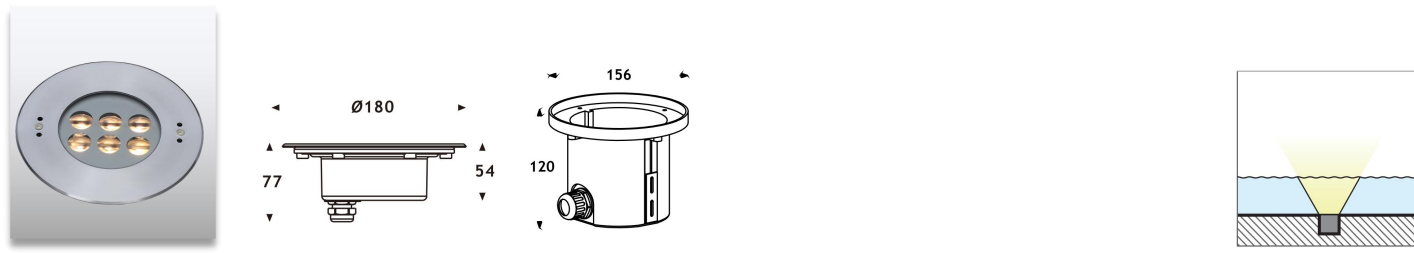


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-B4YA	1*12W	CREE COB	12/24VDC	15°/25°/36°/60°	1150lm	Single	08	68
	6*2W	CREE/OSRAM		15°/25°/36°/60°/100°	1008lm	Single		
	6*2W	CREE/OSRAM		Asymmetrical 25°/45°	1008lm	Single		
	6*3W	OSRAM		25°/40°/60°	490lm	RGB 3in1		
	6*3W	OSRAM		25°/40°/60°	680lm	RGBW 4in1		

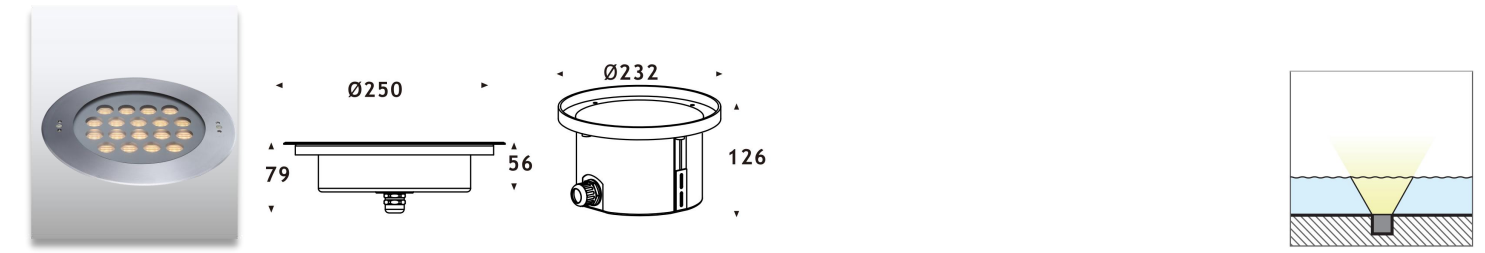

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-B4FA	1*24W	CREE COB	12/24VDC	15°/25°/36°/60°	4500lm	Single	10	68
	18*2W	CREE/OSRAM		10°/15°/20°/30°/60°/100°	2900lm	Single		
	18*3W	CREE/OSRAM		Asymmetrical 25°/45°	2900lm	Single		
	18*3W	OSRAM		25°/40°/60°	1800lm	RGB 3in1		
	18*3W	OSRAM		25°/40°/60°	2500lm	RGBW 4in1		

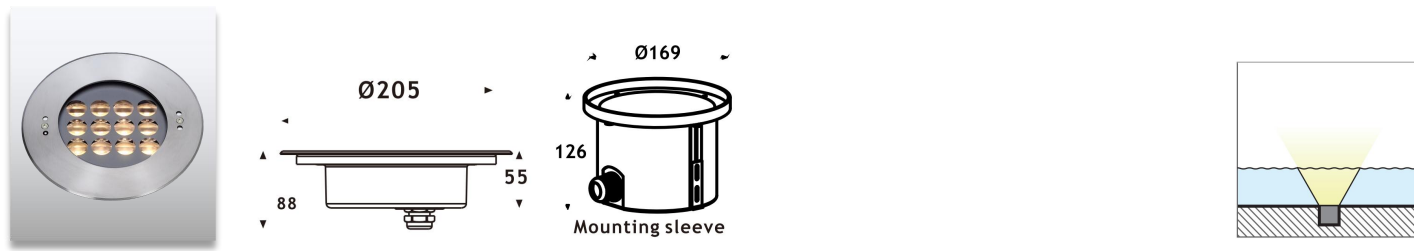

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-B4ZA	6*2W	CREE/OSRAM	12/24VDC	15°/25°/36°/60°/100°	1180lm	Single	08	68
	6*2W	CREE/OSRAM		Asymmetrical 25°/45°	1180lm	Single		
	6*3W	OSRAM		25°/40°/60°	490lm	RGB 3in1		
	6*3W	OSRAM		25°/40°/60°	680lm	RGBW 4in1		

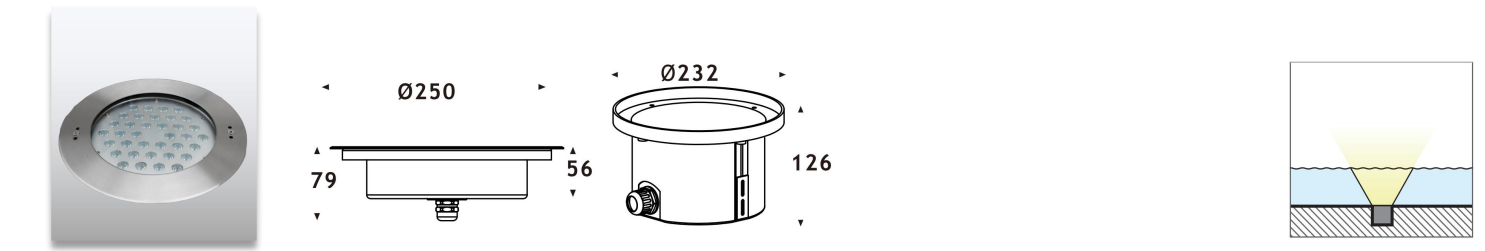


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-B4FB	36*1.5W	CREE/OSRAM	12/24VDC	15°/25°/36°/60°/100°	4320lm	Single	10	68
	36*1.5W	OSRAM		25°/40°/60°	3420lm	RGB		

# AL-4A Recessed Underwater Light



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-4AA	1*1.5W	CREE/OSRAM	12/24VDC	10°/25°/40°/60°	140lm	Single	08	68


# AL-4X Recessed Underwater Light

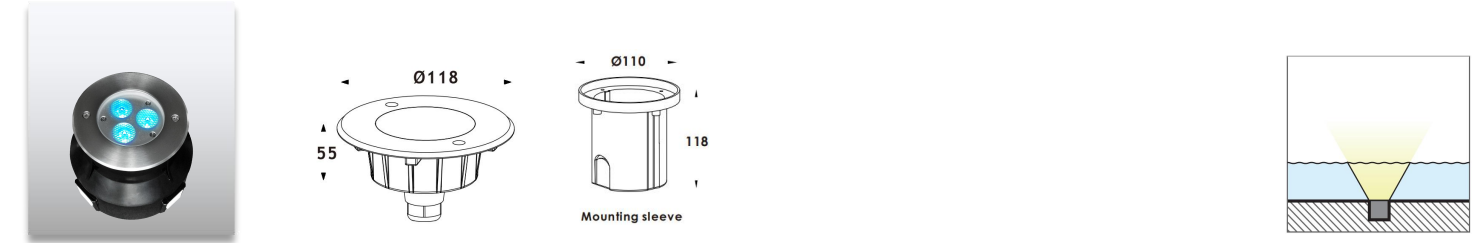

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-4X	3*2W 3*3W 3*3W	CREE/OSRAM OSRAM OSRAM	12/24VDC	10°/20°/30°/60° 25°/40°/60° 25°/40°/60°	530lm 230lm 320lm	Single RGB 3in1 RGBW 4in1	08	68




Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-4AB	1*2W 1*2W 1*3W 1*3W	CREE/OSRAM CREE/OSRAM OSRAM OSRAM	12/24VDC	10°/25°/40°/60° Asymmetrical 25°/45° 25°/40°/60° 25°/40°/60°	160lm 160lm 75lm 100lm	Single Single RGB 3in1 RGBW 4in1	08	68

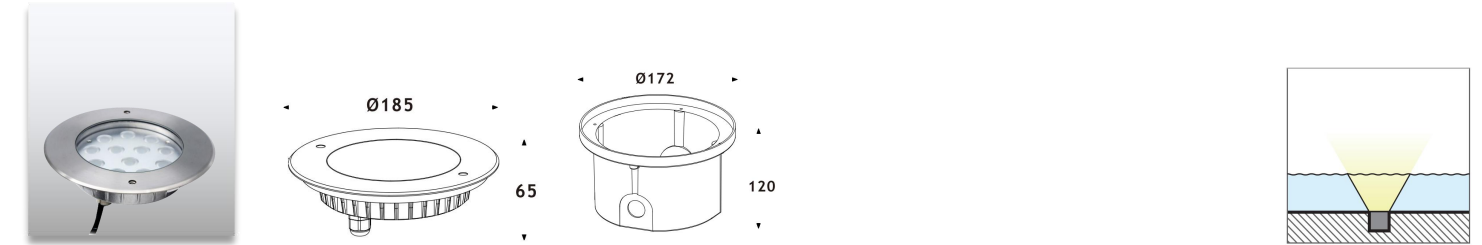

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-4Z	12*2W 12*3W 12*3W 18*1.5W	CREE/OSRAM OSRAM OSRAM OSRAM	12/24VDC	10°/20°/30°/60° 25°/40°/60° 25°/40°/60° 25°/40°/60°	1920lm 900lm 1260lm 2000lm	Single RGB 3in1 RGBW 4in1 Single	10	68




Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-4AC	1*2W 1*2W 1*3W 1*3W	CREE/OSRAM CREE/OSRAM OSRAM OSRAM	12/24VDC	10°/25°/40°/60° Asymmetrical 25°/45° 25°/40°/60° 25°/40°/60°	160lm 160lm 75lm 100lm	Single Single RGB 3in1 RGBW 4in1	08	68

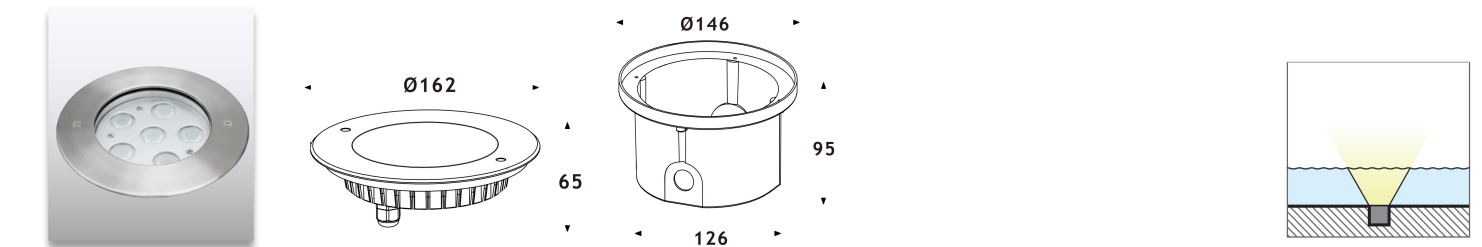


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-4Y	6*2W 6*3W 6*3W 9*1.5W 9*1.5W 9*2W 9*2W	CREE/OSRAM OSRAM OSRAM OSRAM CREE/OSRAM OSRAM OSRAM OSRAM	12/24VDC	10°/20°/30°/60° 25°/40°/60° 25°/40°/60° 25°/40°/60° 10°/20°/30°/60° 15°/25°/40°/60° 25°/40°/60° 25°/40°/60°	980lm 490lm 680lm 2000lm 1360lm 980lm 660lm 930lm	Single RGB 3in1 RGBW 4in1 Single Single Single RGB 3in1 RGBW 4in1	08	68

# AL-4L Recessed Underwater Light

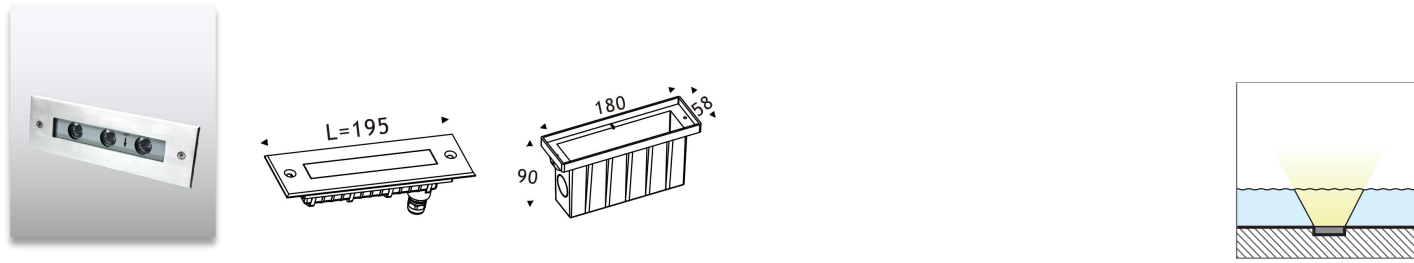


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-4FL	3*2W	CREE/OSRAM	12/24VDC	10°/25°/40°/60°/45° 35°	400lm	Single	08	68
	3*2.5W	OSRAM		10°/25°/40°/60°/45° 35°	180lm	RGB 3in1		
	3*3.5W	OSRAM		10°/25°/40°/60°/45° 35°	260lm	RGBW 4in1		


# AL-4L Recessed Underwater Light

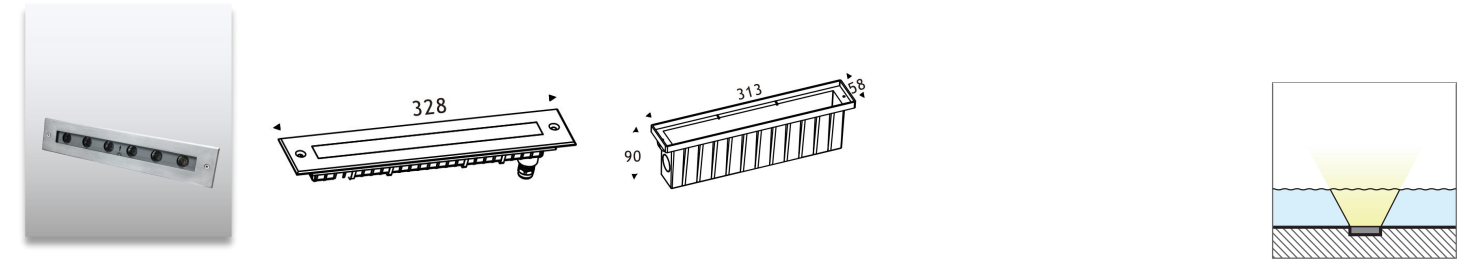


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-4BL	6*2W	CREE/OSRAM	12/24VDC	10°/25°/40°/60°/45° 35°	798lm	Single	08	68
	6*2.5W	OSRAM		10°/25°/40°/60°/45° 35°	375lm	RGB 3in1		
	6*3.5W	OSRAM		10°/25°/40°/60°/45° 35°	520lm	RGBW 4in1		

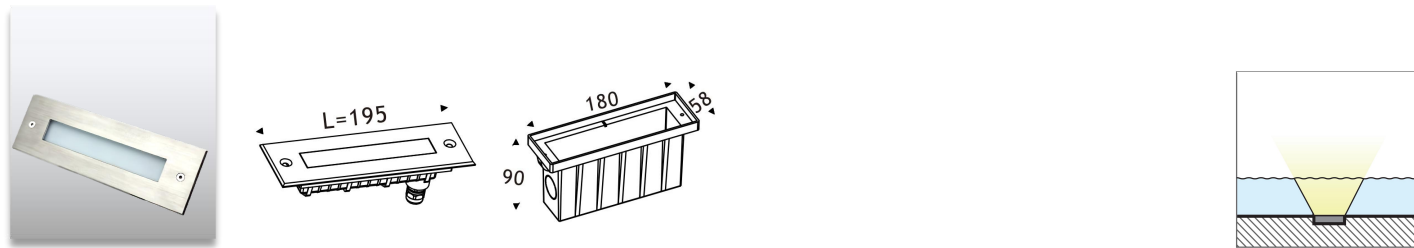


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-4FL-D	2.2W	OSRAM	12/24VDC	120°	25lm	Single	08	68
	2.2W	OSRAM		120°	25lm	RGB 3in1		

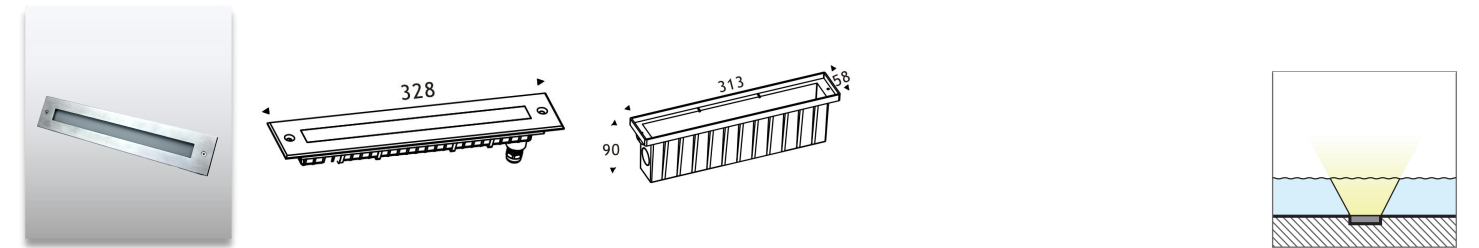

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-4BL-D	4.8W	OSRAM	12/24VDC	120°	50lm	Single	10	68
	4.8W	OSRAM		120°	25lm	RGB 3in1		

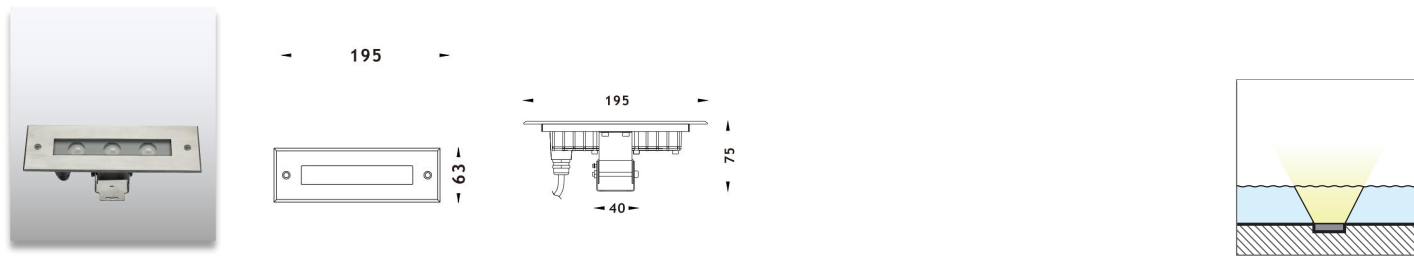


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-5FL	3*2W	CREE/OSRAM	12/24VDC	25°/40°/60°	400lm	Single	08	68
	3*2.5W	OSRAM		25°/40°/60°	180lm	RGB 3in1		
	3*3.5W	OSRAM		25°/40°/60°	260lm	RGBW 4in1		

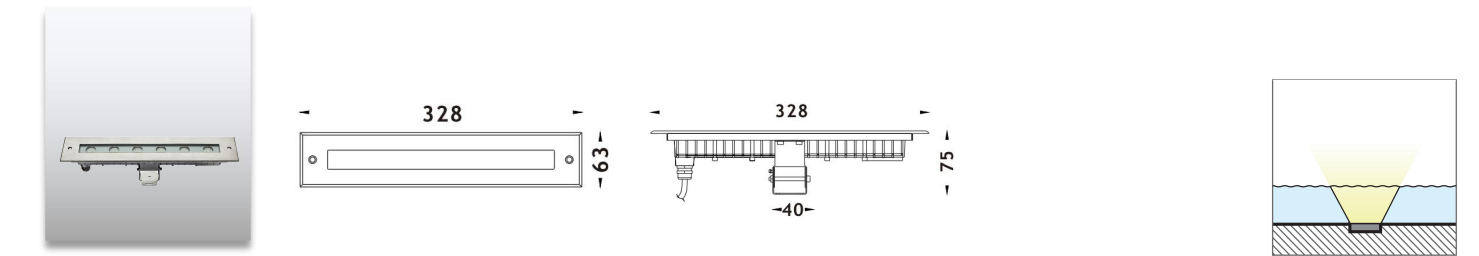


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-5BL	6*2W	CREE/OSRAM	12/24VDC	25°/40°/60°	798lm	Single	08	68
	6*3W	OSRAM		25°/40°/60°	375lm	RGB 3in1		
	6*4W	OSRAM		25°/40°/60°	520lm	RGBW 4in1		

## AL-4T LED Fountain Light

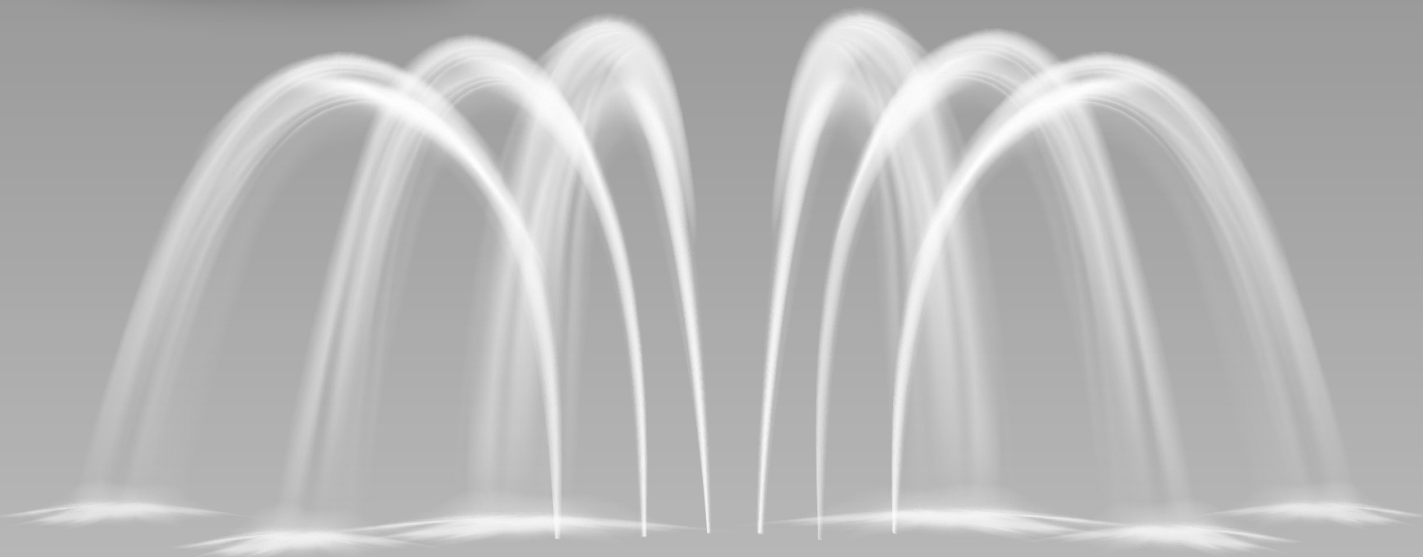

### Product Description

- IP68 for outdoor fountain lighting applications.
- Recessed and surface mounted.
- Body in SUS 316 stainless steel.
- Screen in tempered glass.
- RGBW 4in1 DMX512, DALI, 0-10V, Triacdimmmable.
- High lumen output high-power LED and COB LED light source.
- IK08 impact resistance.
- Over 2000kg loading capacity.
- Pre-wired with 3 meters of power cable.
- 5 years warranty.
- CE, ROHS, UKCA certified.

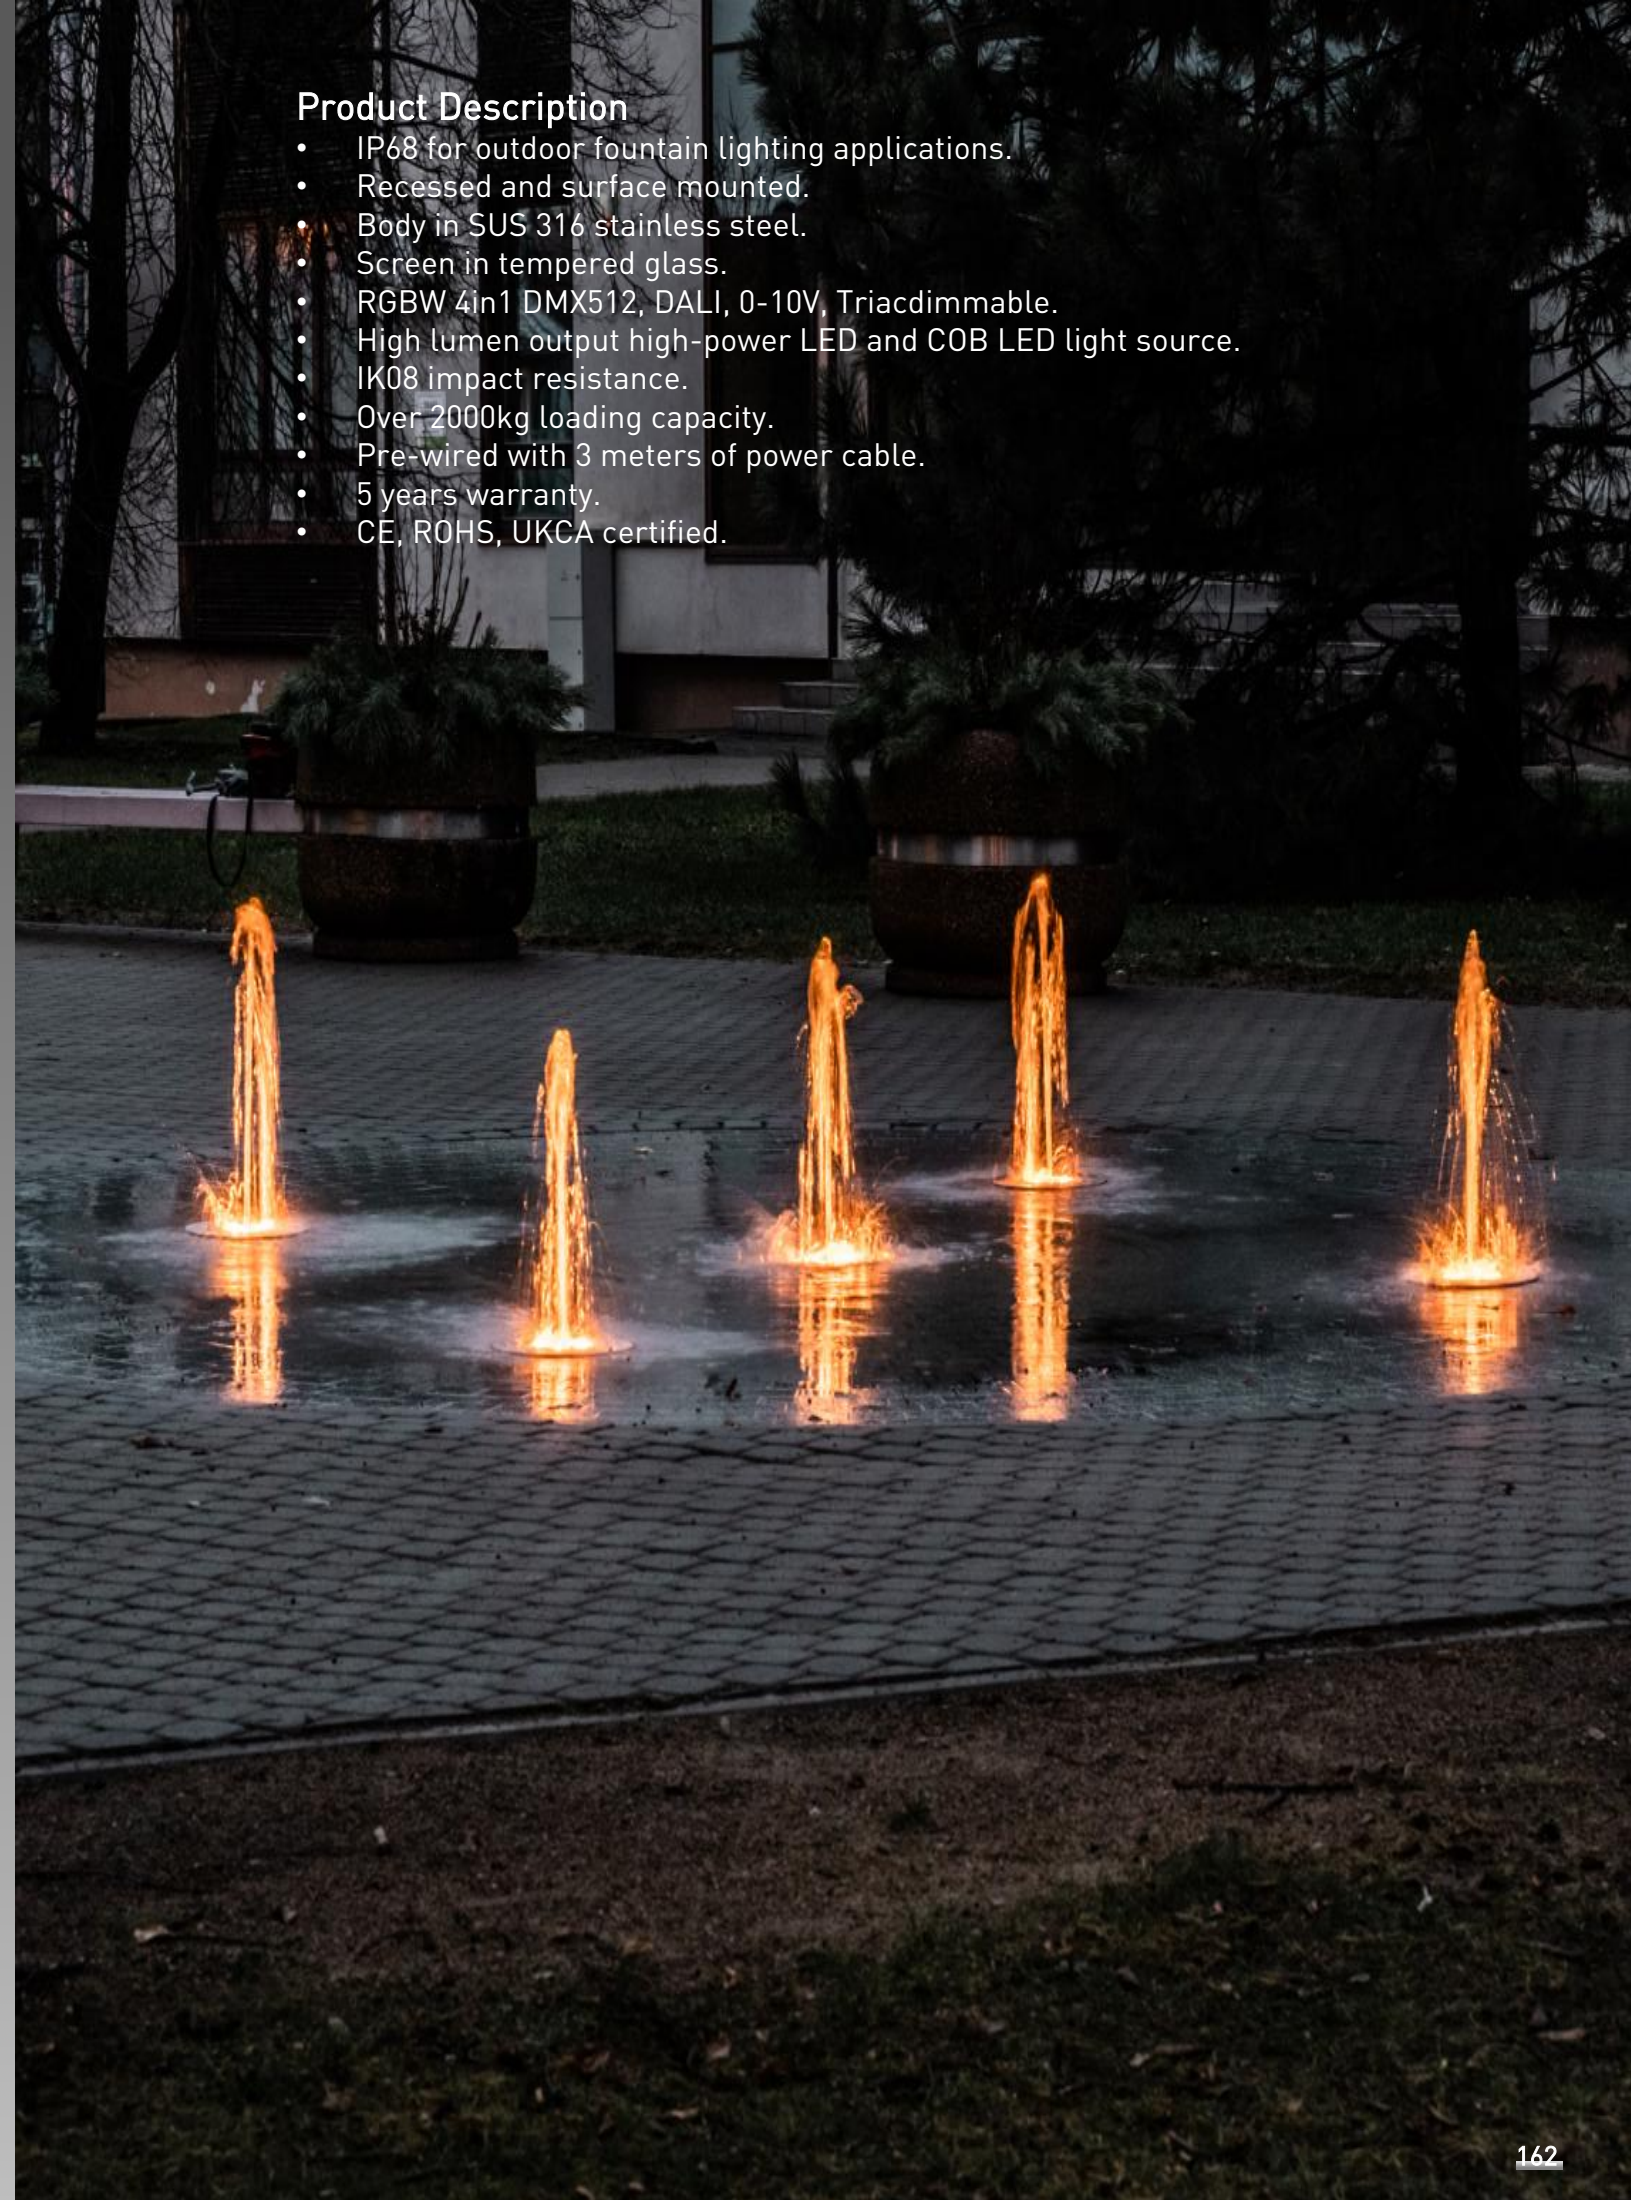



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-4SA	9*2W	CREE/OSRAM	12/24VDC	10°/20°/30°/45°/60°	1450lm	Single	08	68
	9*2.5W	OSRAM			690lm	RGB 3in1		
	9*3.5W	OSRAM			960lm	RGBW 4in1		



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-4SB	9*2W	CREE/OSRAM	12/24VDC	10°/20°/30°/45°/60°	1450lm	Single	08	68
	9*2.5W	OSRAM			690lm	RGB 3in1		
	9*3.5W	OSRAM			960lm	RGBW 4in1		



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-4J	9*2W	CREE/OSRAM	12/24VDC	10°/20°/30°/45°/60°	1450lm	Single	08	68
	9*2.5W	OSRAM			690lm	RGB 3in1		
	9*3.5W	OSRAM			960lm	RGBW 4in1		



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-4B	6*2W	CREE/OSRAM	12/24VDC	10°/20°/30°/45°/60°	1020lm	Single	08	68
	6*2.5W	OSRAM			450lm	RGB 3in1		
	6*3.5W	OSRAM			630lm	RGBW 4in1		



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-4TA	9*2W	CREE/OSRAM	12/24VDC	10°/20°/30°/45°/60°	1450lm	Single	08	68
	9*2.5W	OSRAM			690lm	RGB 3in1		
	9*3.5W	OSRAM			960lm	RGBW 4in1		
	12*2W	CREE/OSRAM			1950lm	Single		
	12*2.5W	OSRAM			900lm	RGB 3in1		
	12*3.5W	OSRAM			1260lm	RGBW 4in1		




Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-4TB	9*2W	CREE/OSRAM	12/24VDC	10°/20°/30°/45°/60°	1450lm	Single	08	68
	9*2.5W	OSRAM			690lm	RGB 3in1		
	9*3.5W	OSRAM			960lm	RGBW 4in1		
	12*2W	CREE/OSRAM			1950lm	Single		
	12*2.5W	OSRAM			900lm	RGB 3in1		
	12*3.5W	OSRAM			1260lm	RGBW 4in1		


## AL-5K LED Underwater Flood Light



### Product Description


- IP68 for outdoor underwater lighting applications.
- Surface mounted.
- Body and bracket in SUS 316L stainless steel.
- RGBW 4in1 DMX512, DALI dimmable.
- 2700K, 3000K, 4000K, 6000K, CRI 90+.
- High lumen output COB LED and high-power LED light source.
- Equipped with overheat sensor protection.
- Pre-wired with 3 meters of power cable.
- IK08 impact resistance.
- Light distribution can be adjusted.
- 5 years warranty.
- CE, ROHS, UKCA certified.

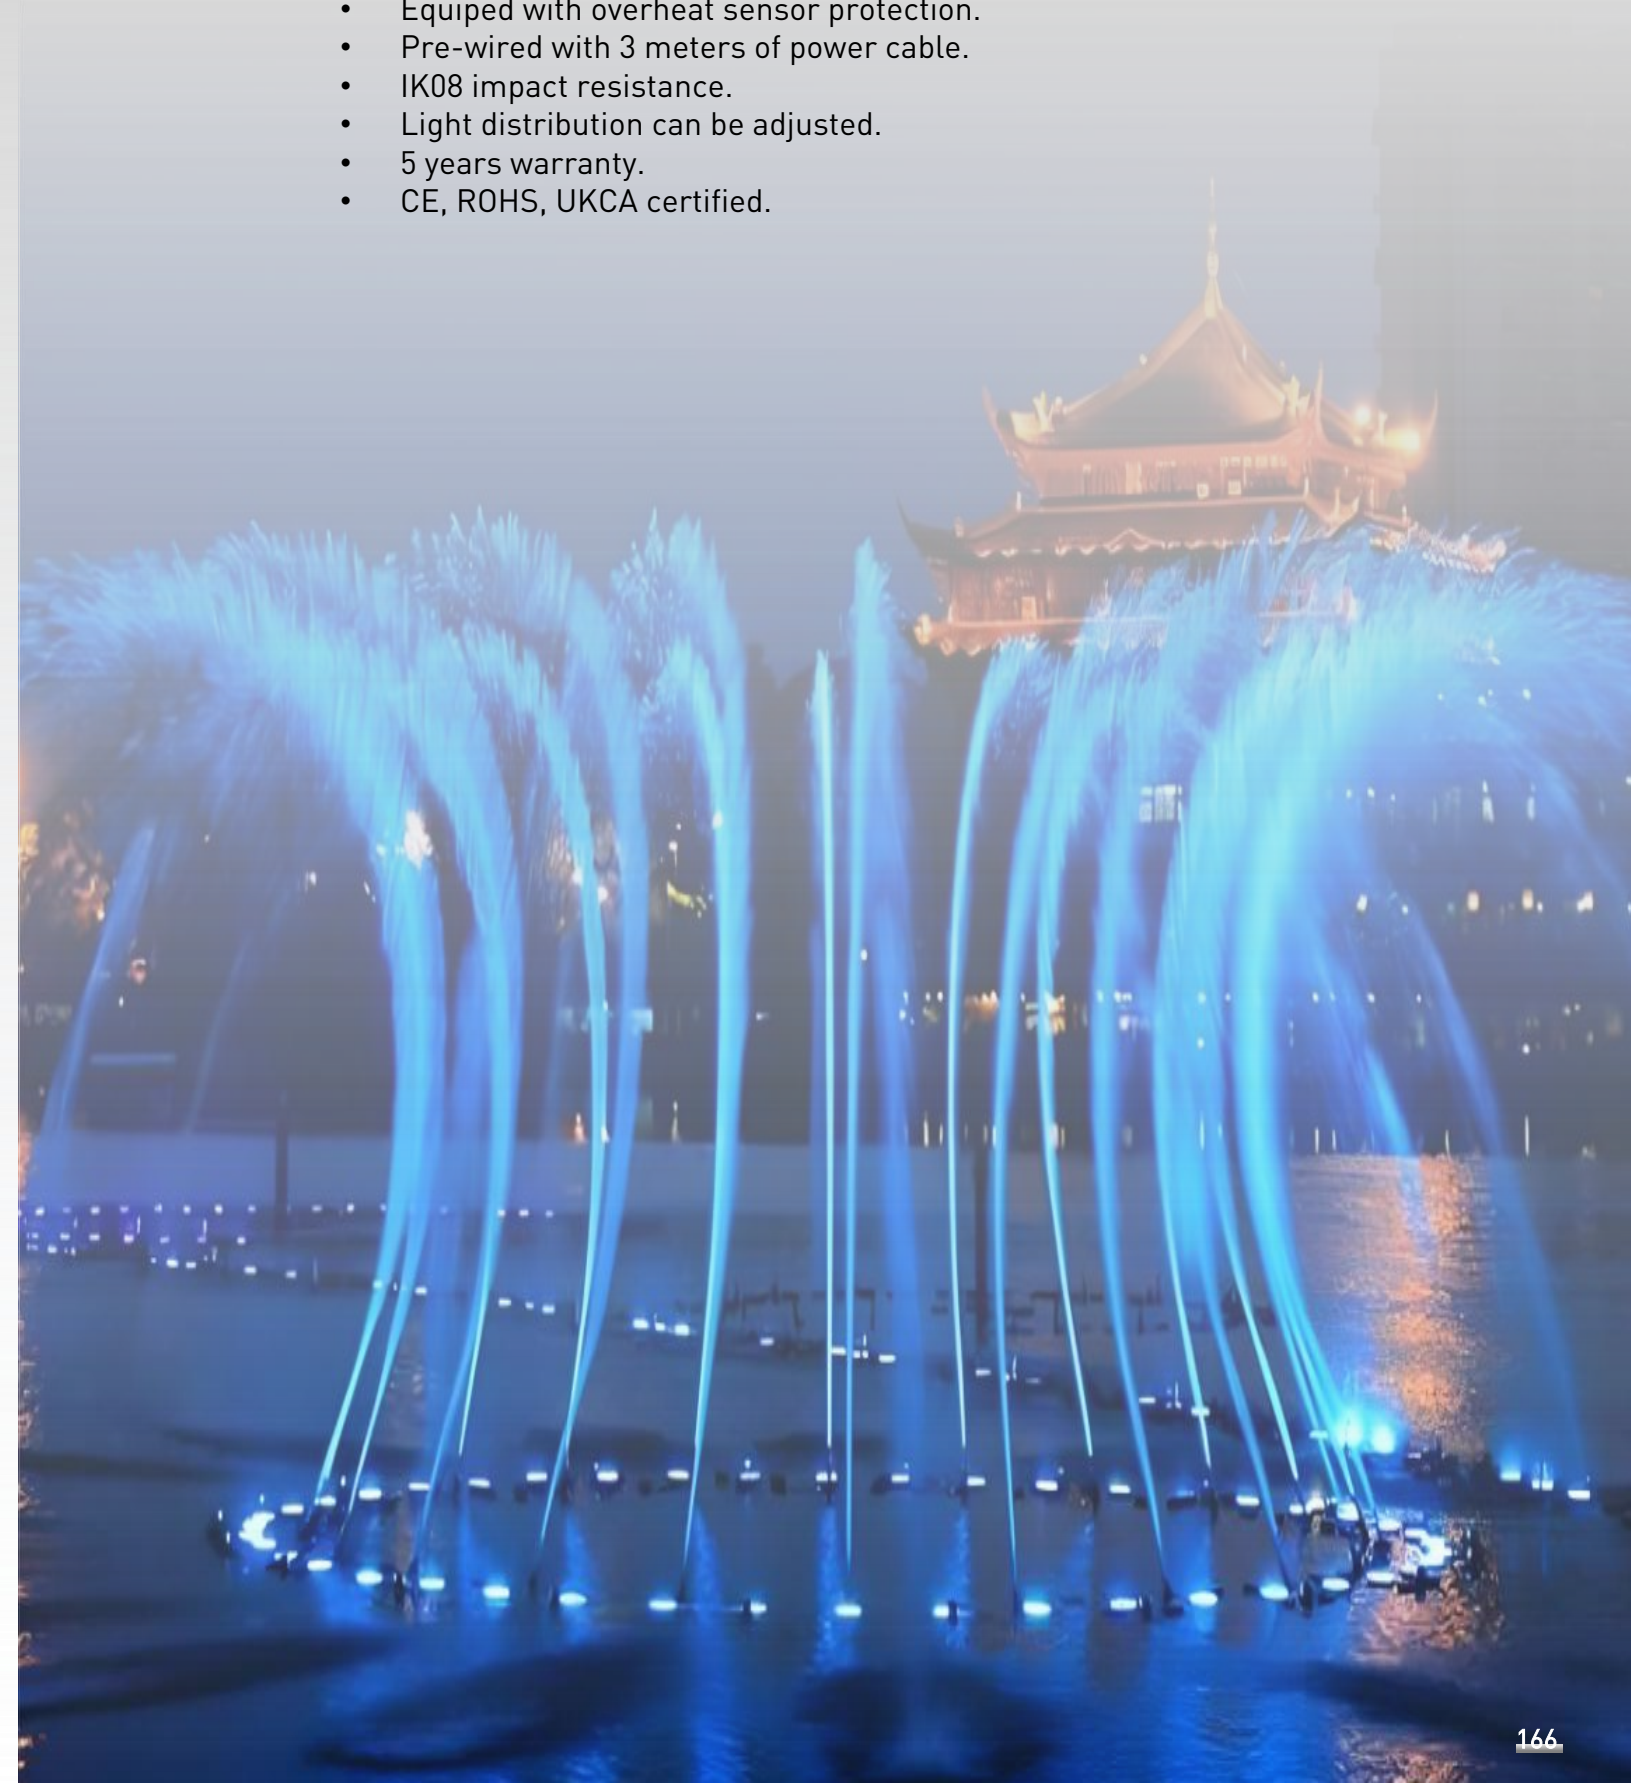

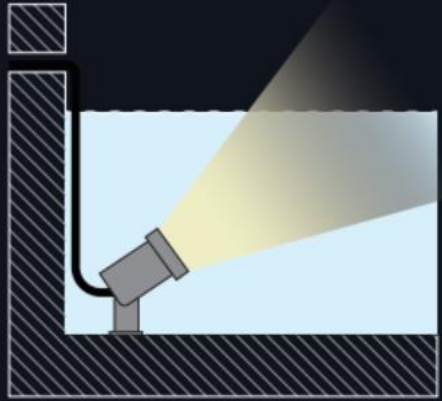

Ground Mounted

Ground Mounted Installation

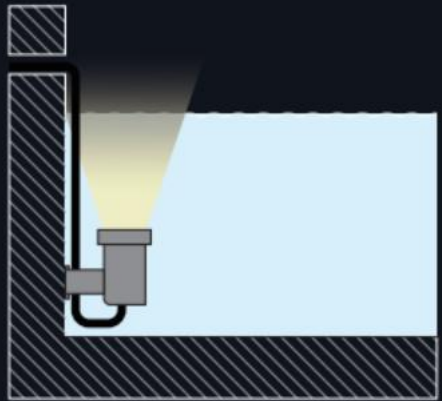

Wall Mounted

Wall Mounted Installation




# AL-5R Underwater Spotlight



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-5RA	1*4W	CREE COB	12/24VDC	15°/24°/36°/55°	300lm	Single	08	68
	1*3W	CREE/OSRAM		5°/10°/25°/40°/60°/80°	210lm	Single		
	1*3W	OSRAM		25°/40°/60°	75lm	RGB 3in1		
	1*4W	OSRAM		25°/40°/60°	100lm	RGBW 4in1		



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-5RB	1*6W	CREE COB	12/24VDC	15°/24°/36°/55°	540lm	Single	08	68
	3*2W	CREE/OSRAM		5°/10°/25°/40°/60°/80°	300lm	Single		
	3*2.5W	OSRAM		25°/40°/60°	200lm	RGB 3in1		
	3*3.5W	OSRAM		25°/40°/60°	260lm	RGBW 4in1		

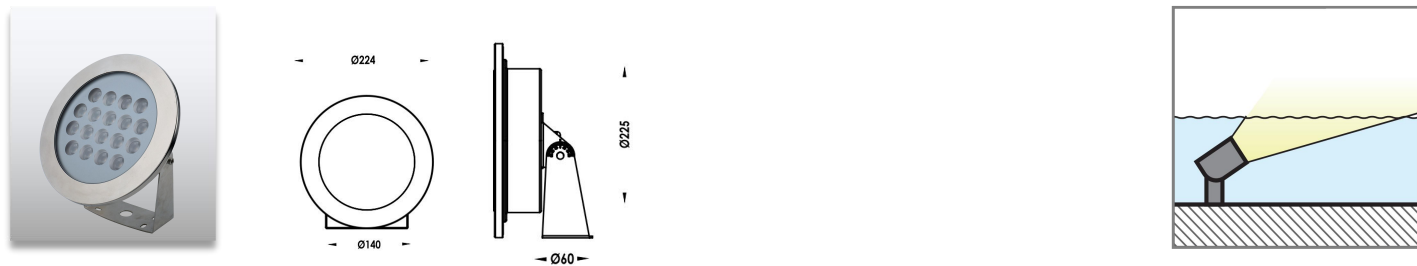

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-5FA	1*45W	CREE COB	12/24VDC	15°/24°/36°/55°	4500lm	Single	08	68
	18*2W	CREE/OSRAM		5°/10°/25°/40°/60°/80°	2400lm	Single		
	18*2.5W	OSRAM		25°/40°/60°	1800lm	RGB 3in1		
	18*3.5W	OSRAM		25°/40°/60°	2900lm	RGBW 4in1		

# AL-5K Underwater Flood Light



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-5KA	1*6W	CREE COB	12/24VDC	12°/24°/36°	400lm	Single	08	68
	3*2W	CREE/OSRAM		5°/10°/25°/40°/60°/80°	520lm	Single		
	3*2.5W	OSRAM		25°/40°/60°	200lm	RGB 3in1		
	3*3.5W	OSRAM		25°/40°/60°	260lm	RGBW 4in1		



Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-5KB	1*15W	CREE COB	12/24VDC	12°/24°/36°	1200lm	Single	08	68
	6*2W	CREE/OSRAM		5°/10°/25°/40°/60°/80°	900lm	Single		
	6*2.5W	OSRAM		25°/40°/60°	450lm	RGB 3in1		
	6*3.5W	OSRAM		25°/40°/60°	630lm	RGBW 4in1		




Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-5KC	1*20W	CREE COB	12/24VDC	12°/24°/36°	1600lm	Single	08	68
	12*2W	CREE/OSRAM		5°/10°/25°/40°/60°/80°	2400lm	Single		
	12*2.5W	OSRAM		25°/40°/60°	900lm	RGB 3in1		
	12*3.5W	OSRAM		25°/40°/60°	1260lm	RGBW 4in1		



## Product Description


- Recessed and surface mounted installation.
- Body in SUS 316 stainless steel or PC material.
- 12/24VDC or 12VAC safe input voltage.
- Ultra-slim dimension 8mm or 10mm thickness.
- DALI, 0-10V, Triac dimmable.
- SMD led light source.
- IK10 impact resistance.
- Pre-wired with 3 meters of power cable.
- 5 years warranty.
- CE, ROHS, UKCA certified.

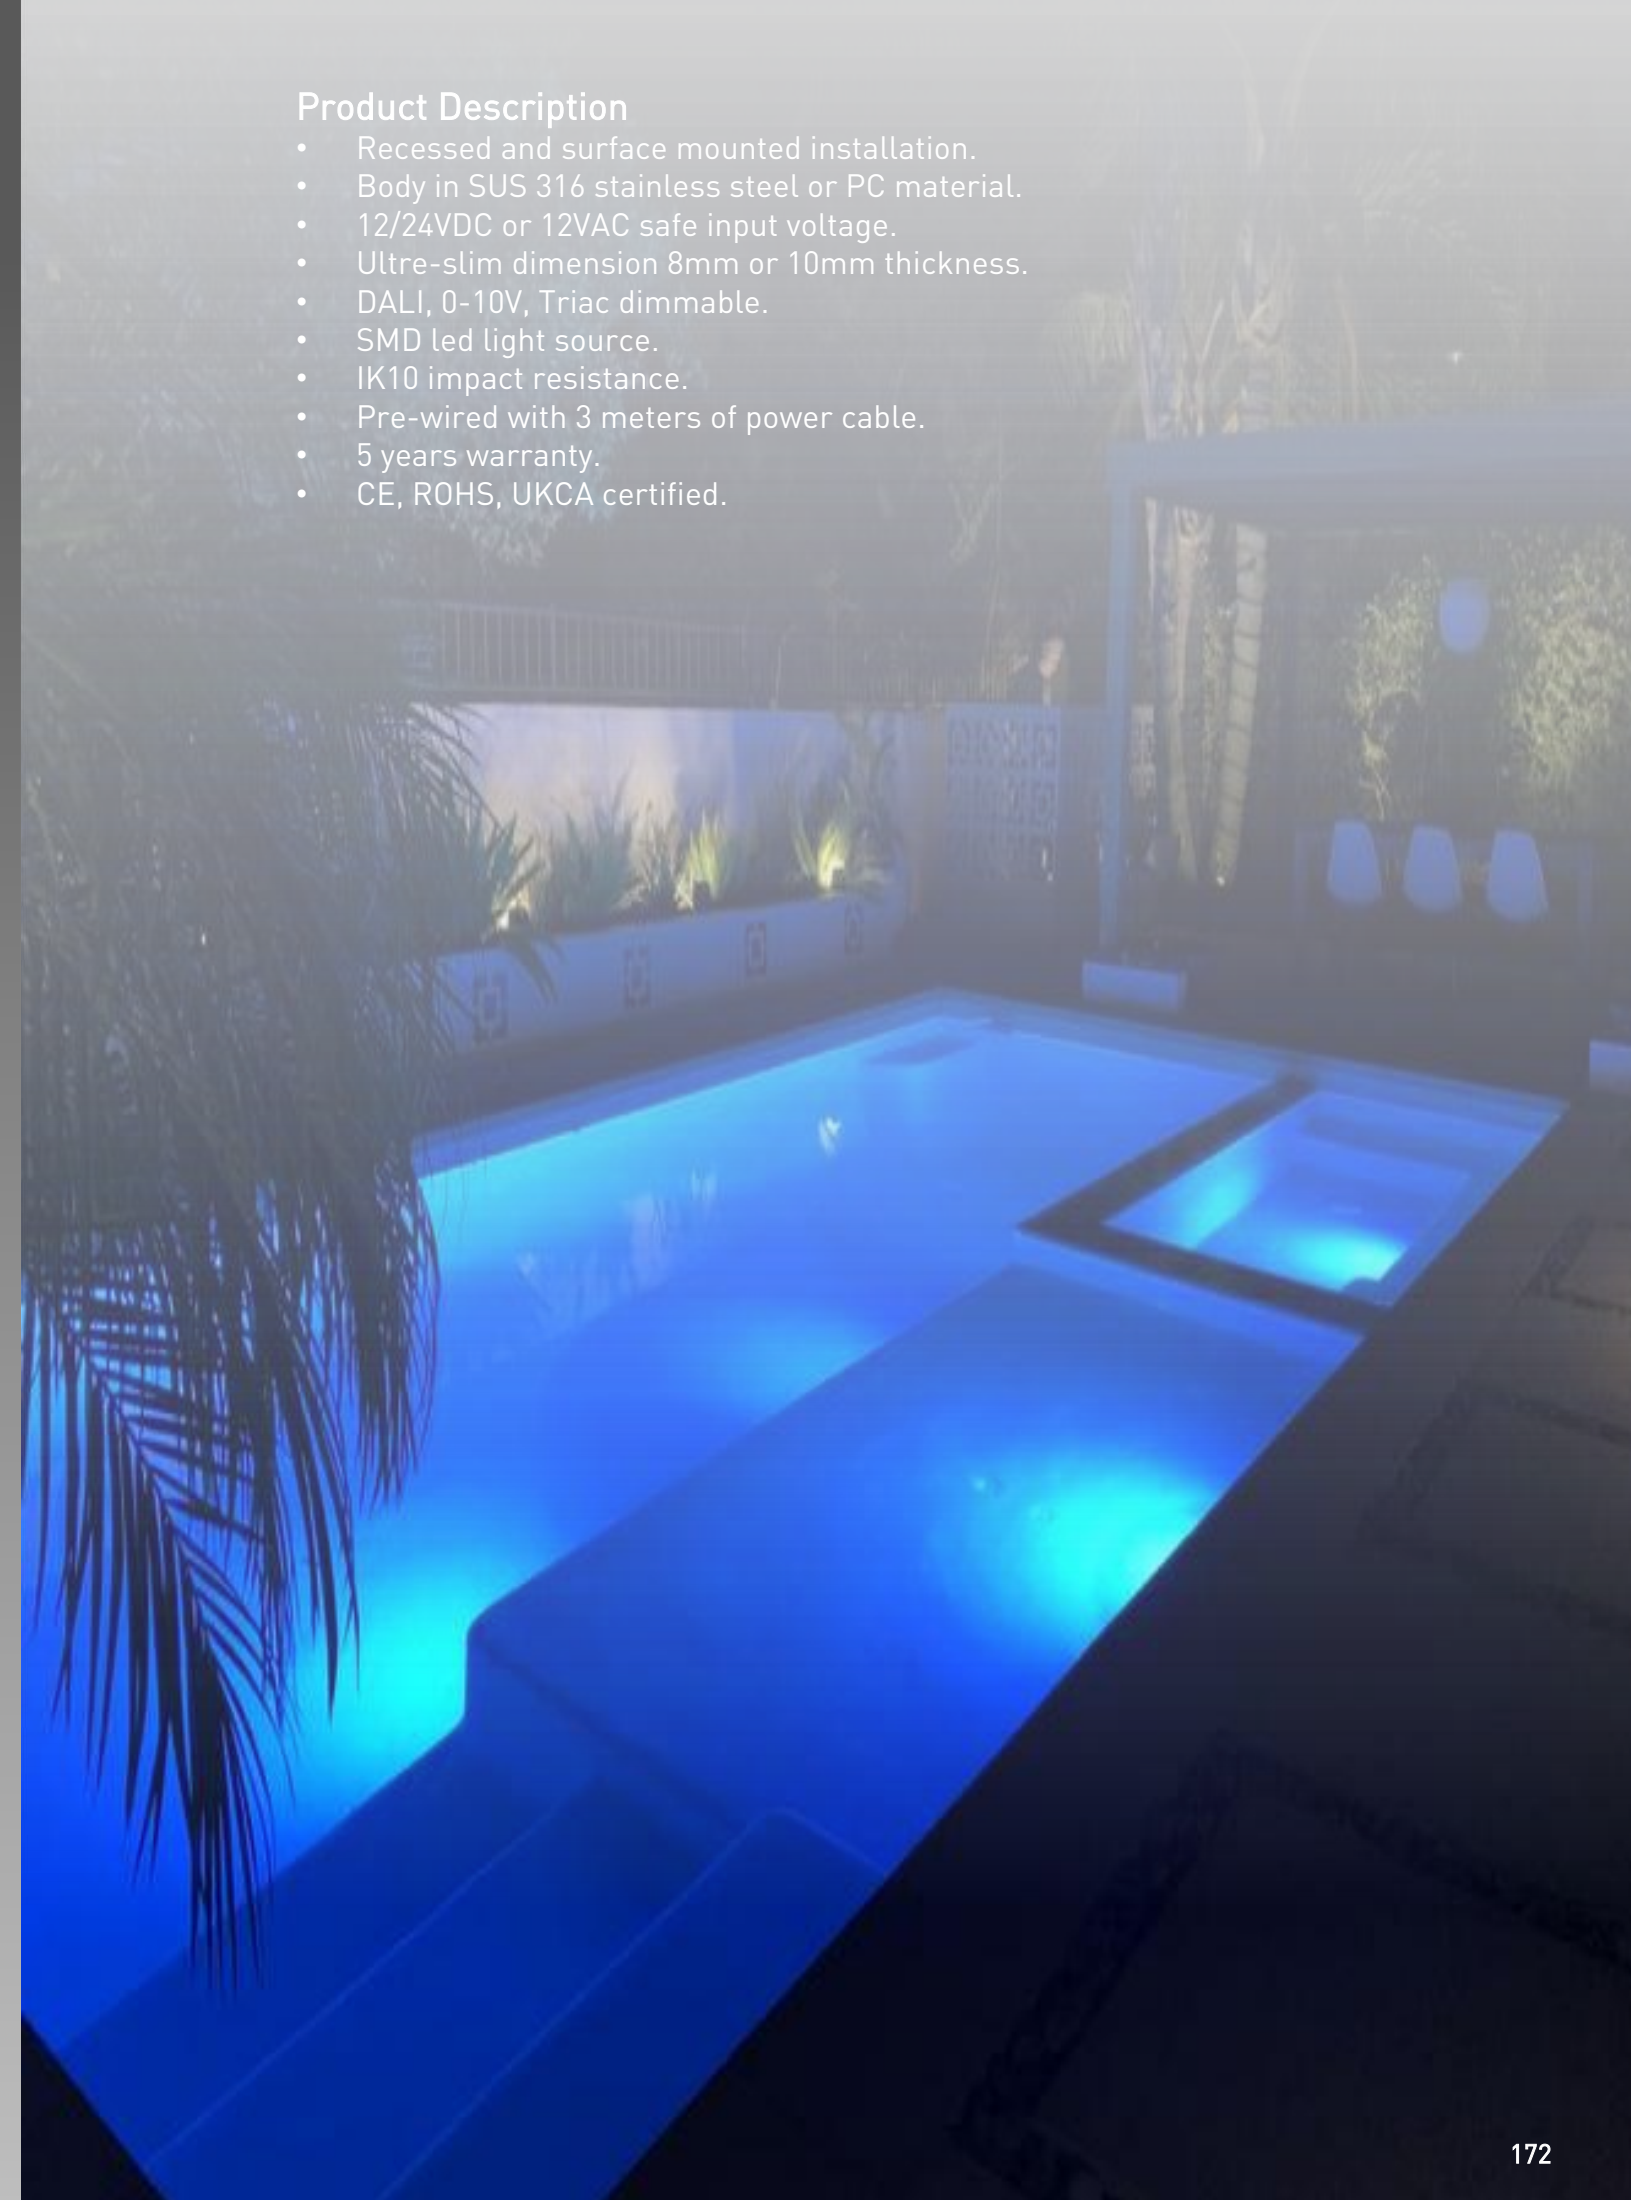


# LED Swimming Pool Light



Product Code	Power	LED Qty	Voltage	Beam Angle	Lumen	Color	Thickness	IP
AL-SWT08-D110-6W	6W	63	12/24VDC	120°	581	3000K 6500K R/G/B RGB	8mm	68

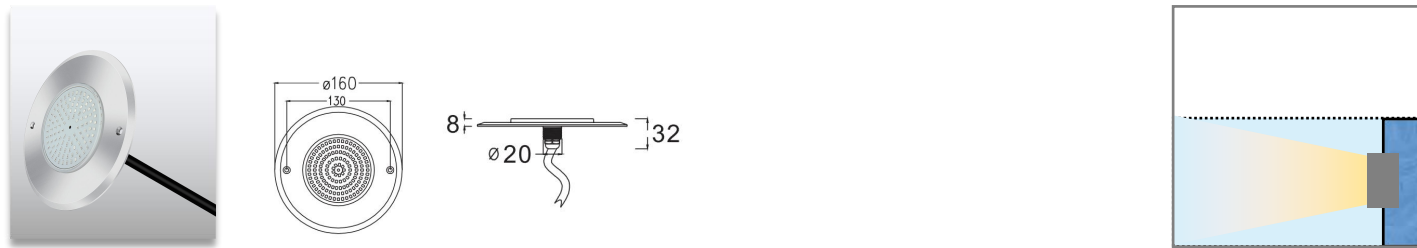


Product Code	Power	LED Qty	Voltage	Beam Angle	Lumen	Color	Thickness	IP
AL-SWT08-D160-10W	10W	108	12/24VDC	120°	1071	3000K 6500K R/G/B RGB	8mm	68

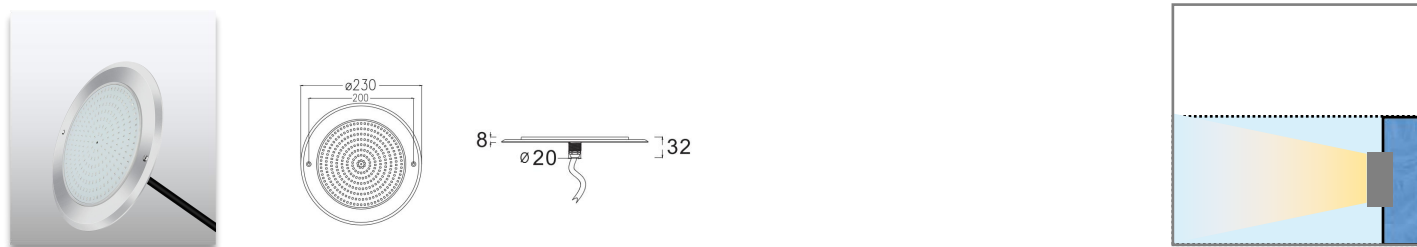


Product Code	Power	LED Qty	Voltage	Beam Angle	Lumen	Color	Thickness	IP
AL-SWT08-D230-18W	18W	252	12/24VDC	120°	1837	3000K 6500K R/G/B/RGB	8mm	68
AL-SWT08-D230-25W	25W	333	12/24VDC	120°	2509	3000K 6500K R/G/B/RGB	8mm	68
AL-SWT08-D230-35W	35W	432	12/24VDC	120°	3549	3000K 6500K R/G/B/RGB	8mm	68


# LED Swimming Pool Light

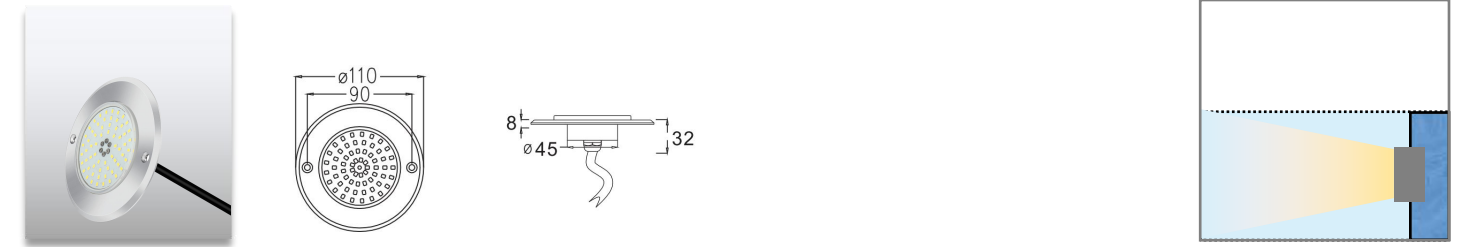

Product Code	Power	LED Qty	Voltage	Beam Angle	Lumen	Color	Thickness	IP
AL-SWT08-A110-6W	6W	63	12VAC	120°	581	3000K 6500K R/G/B RGB	8mm	68

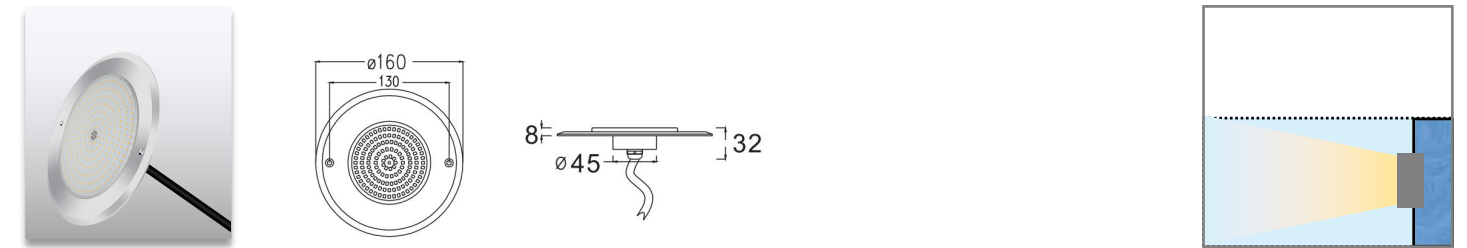

Product Code	Power	LED Qty	Voltage	Beam Angle	Lumen	Color	Thickness	IP
AL-SWT08-A160-10W	10W	108	12/VAC	120°	1071	3000K 6500K R/G/B RGB	8mm	68

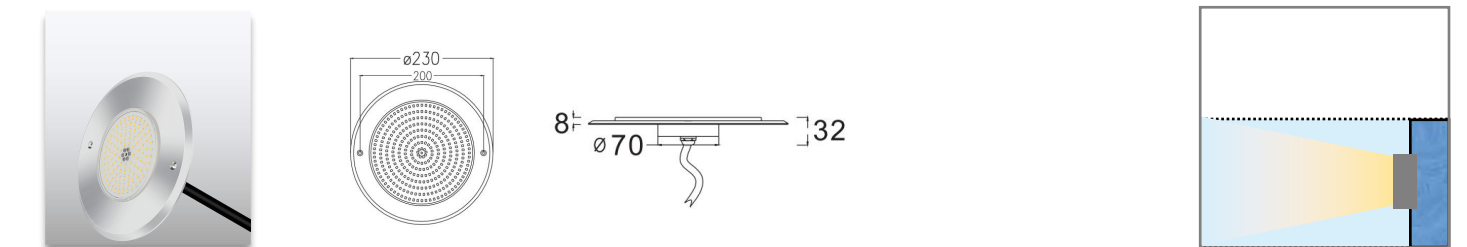


Product Code	Power	LED Qty	Voltage	Beam Angle	Lumen	Color	Thickness	IP
AL-SWT08-A230-18W	18W	252	12VAC	120°	1837	3000K 6500K R/G/B/RGB	8mm	68
AL-SWT08-A230-25W	25W	333	12VAC	120°	2509	3000K 6500K R/G/B/RGB	8mm	68
AL-SWT08-A230-35W	35W	432	12VAC	120°	3549	3000K 6500K R/G/B/RGB	8mm	68


# LED Swimming Pool Light



Product Code	Power	LED Qty	Voltage	Beam Angle	Lumen	Color	Thickness	IP
AL-SWT08-D280-25W	25W	333	12/24VDC	120°	2583	3000K 6500K R/G/B/RGB	8mm	68
AL-SWT08-D280-35W	35W	432	12/24VDC	120°	3654	3000K 6500K R/G/B/RGB	8mm	68
AL-SWT08-D280-45W	45W	540	12/24VDC	120°	4672	3000K 6500K R/G/B/RGB	8mm	68

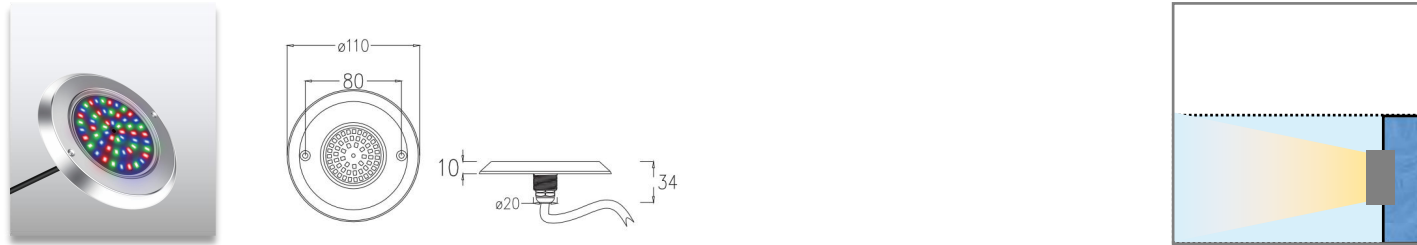


Product Code	Power	LED Qty	Voltage	Beam Angle	Lumen	Color	Thickness	IP
AL-SWT10-D110-6W	6W	54	12/24VDC	120°	581	3000K 6500K R/G/B/RGB	10mm	68

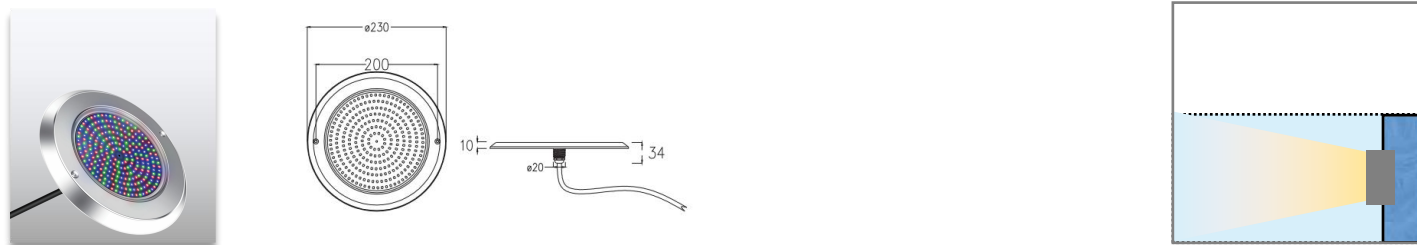


Product Code	Power	LED Qty	Voltage	Beam Angle	Lumen	Color	Thickness	IP
AL-SWT10-D230-18W	18W	252	12/24VDC	120°	1837	3000K 6500K R/G/B/RGB	8mm	68
AL-SWT10-D230-25W	25W	333	12/24VDC	120°	2509	3000K 6500K R/G/B/RGB	8mm	68
AL-SWT10-D230-35W	35W	432	12/24VDC	120°	3549	3000K 6500K R/G/B/RGB	8mm	68


# LED Swimming Pool Light

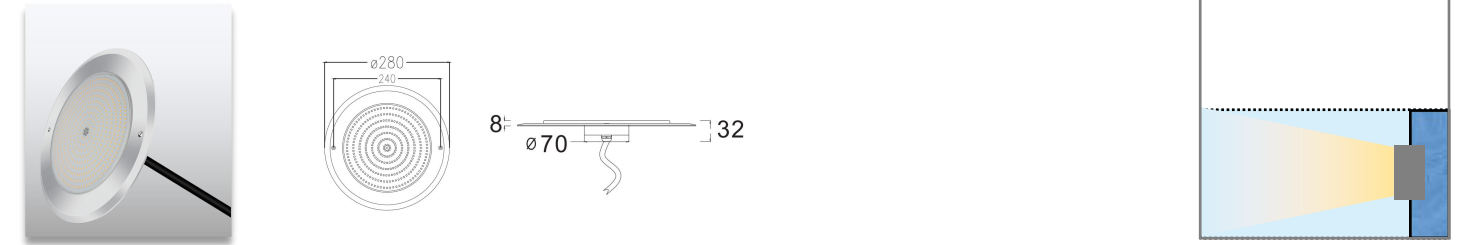


Product Code	Power	LED Qty	Voltage	Beam Angle	Lumen	Color	Thickness	IP
AL-SWT08-A280-25W	25W	333	12VAC	120°	2583	3000K 6500K R/G/B/RGB	8mm	68
AL-SWT08-A280-35W	35W	432	12VAC	120°	3654	3000K 6500K R/G/B/RGB	8mm	68
AL-SWT08-A280-45W	45W	540	12VAC	120°	4672	3000K 6500K R/G/B/RGB	8mm	68

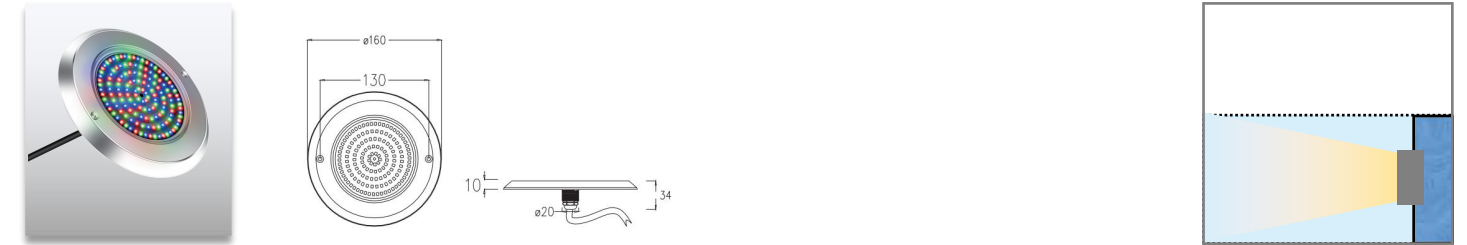


Product Code	Power	LED Qty	Voltage	Beam Angle	Lumen	Color	Thickness	IP
AL-SWT10-D160-10W	10W	135	12/24VDC	120°	1071	3000K 6500K R/G/B/RGB	10mm	68

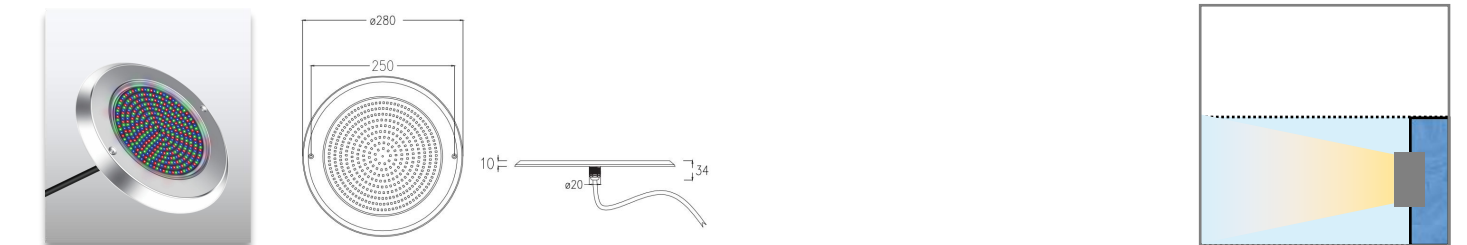


Product Code	Power	LED Qty	Voltage	Beam Angle	Lumen	Color	Thickness	IP
AL-SWT10-A280-25W	25W	333	12VAC	120°	2583	3000K 6500K R/G/B/RGB	10mm	68
AL-SWT10-A280-35W	35W	432	12VAC	120°	3654	3000K 6500K R/G/B/RGB	10mm	68
AL-SWT10-A280-45W	45W	540	12VAC	120°	4672	3000K 6500K R/G/B/RGB	10mm	68

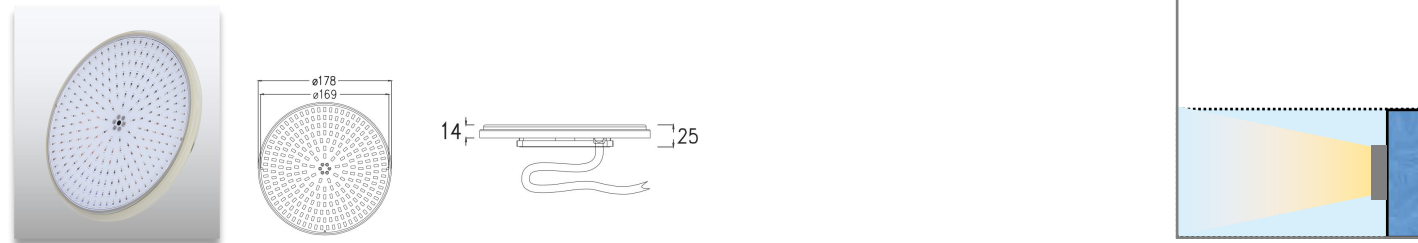


Product Code	Power	LED Qty	Voltage	Beam Angle	Lumen	Color	Diameter	IP
AL-SWRF-A178-18W	18W	252	12VAC	120°	1837lm	3000K 6500K R/G/B/RGB	178mm	68
AL-SWRF-A178-25W	25W	324	12VAC	120°	2509lm	3000K 6500K R/G/B/RGB	178mm	68
AL-SWRF-A178-35W	35W	432	12VAC	120°	3549lm	3000K 6500K R/G/B/RGB	178mm	68
AL-SWRF-A178-42W	42W	540	12VAC	120°	4350lm	3000K 6500K R/G/B/RGB	178mm	68

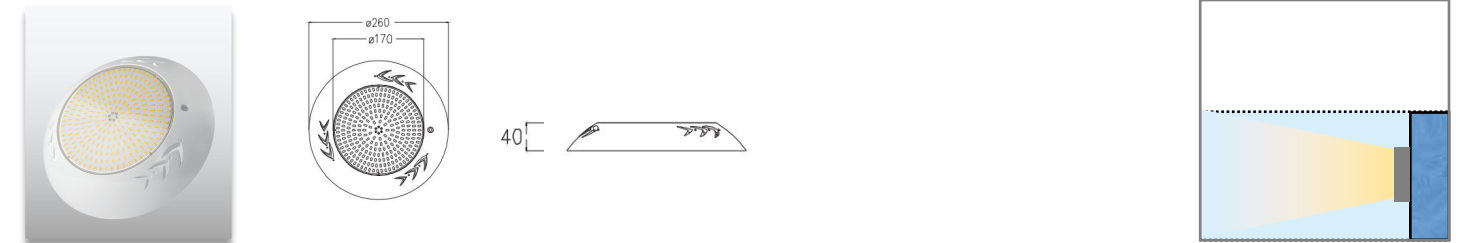


Product Code	Power	LED Qty	Voltage	Beam Angle	Lumen	Color	Diameter	IP
AL-SWRF-A260Y-18W	18W	252	12VAC	120°	1837lm	3000K 6500K R/G/B/RGB	178mm	68
AL-SWRF-A260Y-25W	25W	324	12VAC	120°	2509lm	3000K 6500K R/G/B/RGB	178mm	68
AL-SWRF-A260Y-35W	35W	432	12VAC	120°	3549lm	3000K 6500K R/G/B/RGB	178mm	68
AL-SWRF-A260Y-42W	42W	540	12VAC	120°	4350lm	3000K 6500K R/G/B/RGB	178mm	68

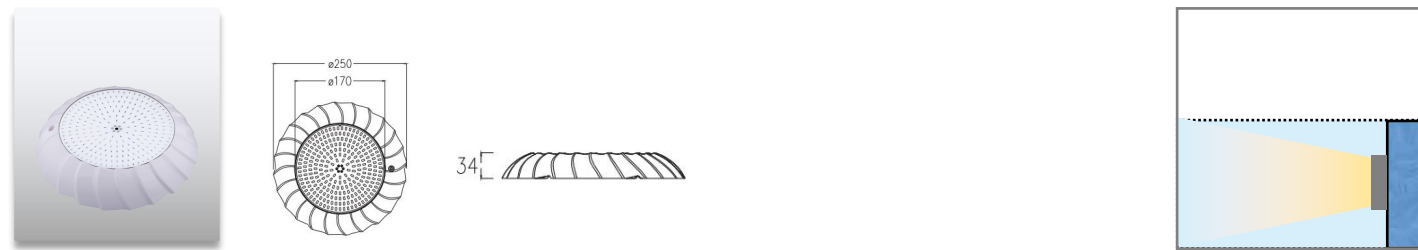


Product Code	Power	LED Qty	Voltage	Beam Angle	Lumen	Color	Diameter	IP
AL-SWRF-A250-18W	18W	252	12VAC	120°	1837lm	3000K 6500K R/G/B/RGB	178mm	68
AL-SWRF-A250-25W	25W	324	12VAC	120°	2509lm	3000K 6500K R/G/B/RGB	178mm	68
AL-SWRF-A250-35W	35W	432	12VAC	120°	3549lm	3000K 6500K R/G/B/RGB	178mm	68
AL-SWRF-A250-42W	42W	540	12VAC	120°	4350lm	3000K 6500K R/G/B/RGB	178mm	68

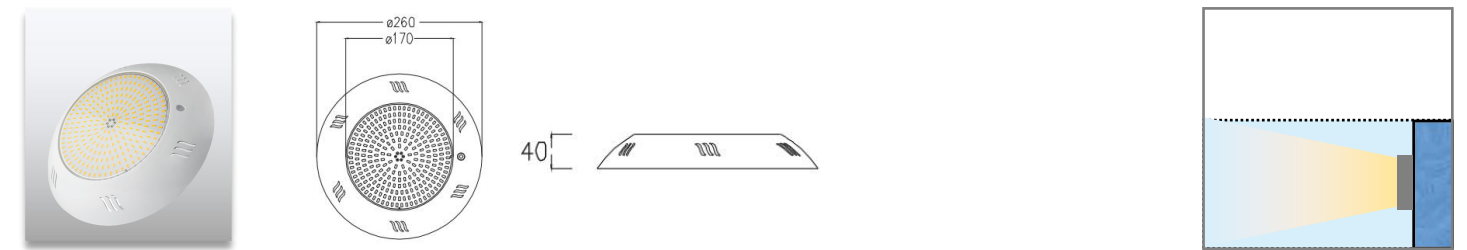


Product Code	Power	LED Qty	Voltage	Beam Angle	Lumen	Color	Diameter	IP
AL-SWRF-A260S-18W	18W	252	12VAC	120°	1837lm	3000K 6500K R/G/B/RGB	178mm	68
AL-SWRF-A260S-25W	25W	324	12VAC	120°	2509lm	3000K 6500K R/G/B/RGB	178mm	68
AL-SWRF-A260S-35W	35W	432	12VAC	120°	3549lm	3000K 6500K R/G/B/RGB	178mm	68
AL-SWRF-A260S-42W	42W	540	12VAC	120°	4350lm	3000K 6500K R/G/B/RGB	178mm	68

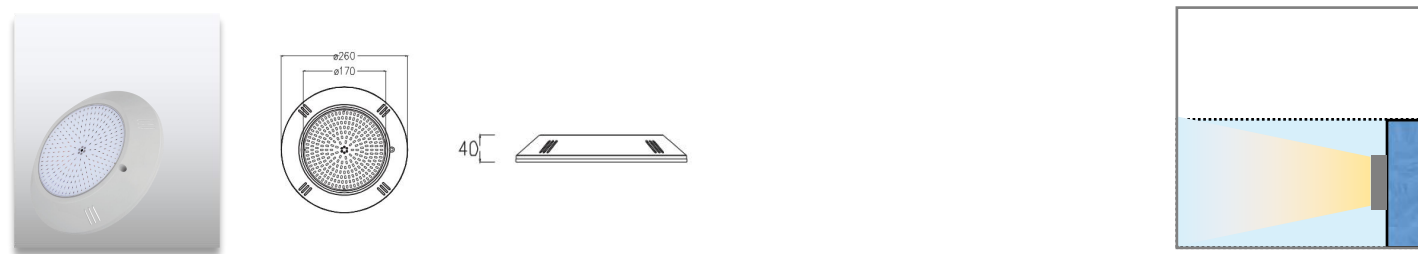

Product Code	Power	LED Qty	Voltage	Beam Angle	Lumen	Color	Diameter	IP
AL-SWRF-A260L-18W	18W	252	12VAC	120°	1837lm	3000K 6500K R/G/B/RGB	178mm	68
AL-SWRF-A260L-25W	25W	324	12VAC	120°	2509lm	3000K 6500K R/G/B/RGB	178mm	68
AL-SWRF-A260L-35W	35W	432	12VAC	120°	3549lm	3000K 6500K R/G/B/RGB	178mm	68
AL-SWRF-A260L-42W	42W	540	12VAC	120°	4350lm	3000K 6500K R/G/B/RGB	178mm	68

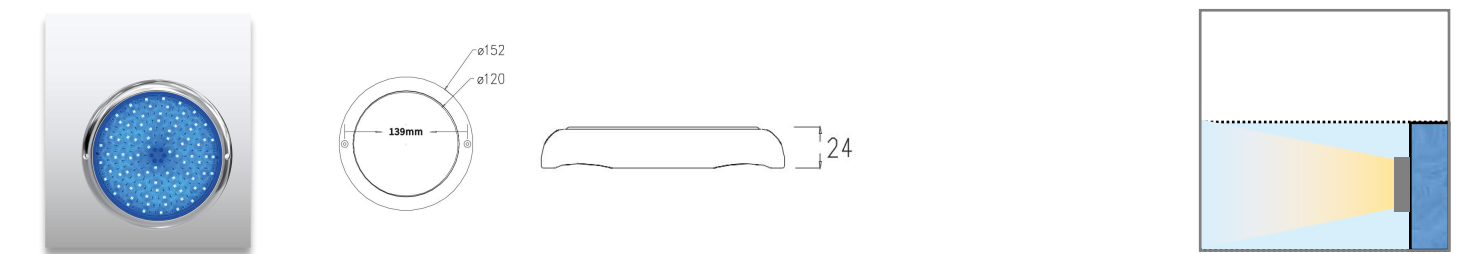

Product Code	Power	LED Qty	Voltage	Beam Angle	Lumen	Color	Diameter	IP
AL-SWRF-A152SS-10W	10W	135	12VAC	120°	997	3000K 6500K R/G/B/RGB	152mm	68
AL-SWRF-A152SS-18W	18W	252	12VAC	120°	1837	3000K 6500K R/G/B/RGB	152mm	68

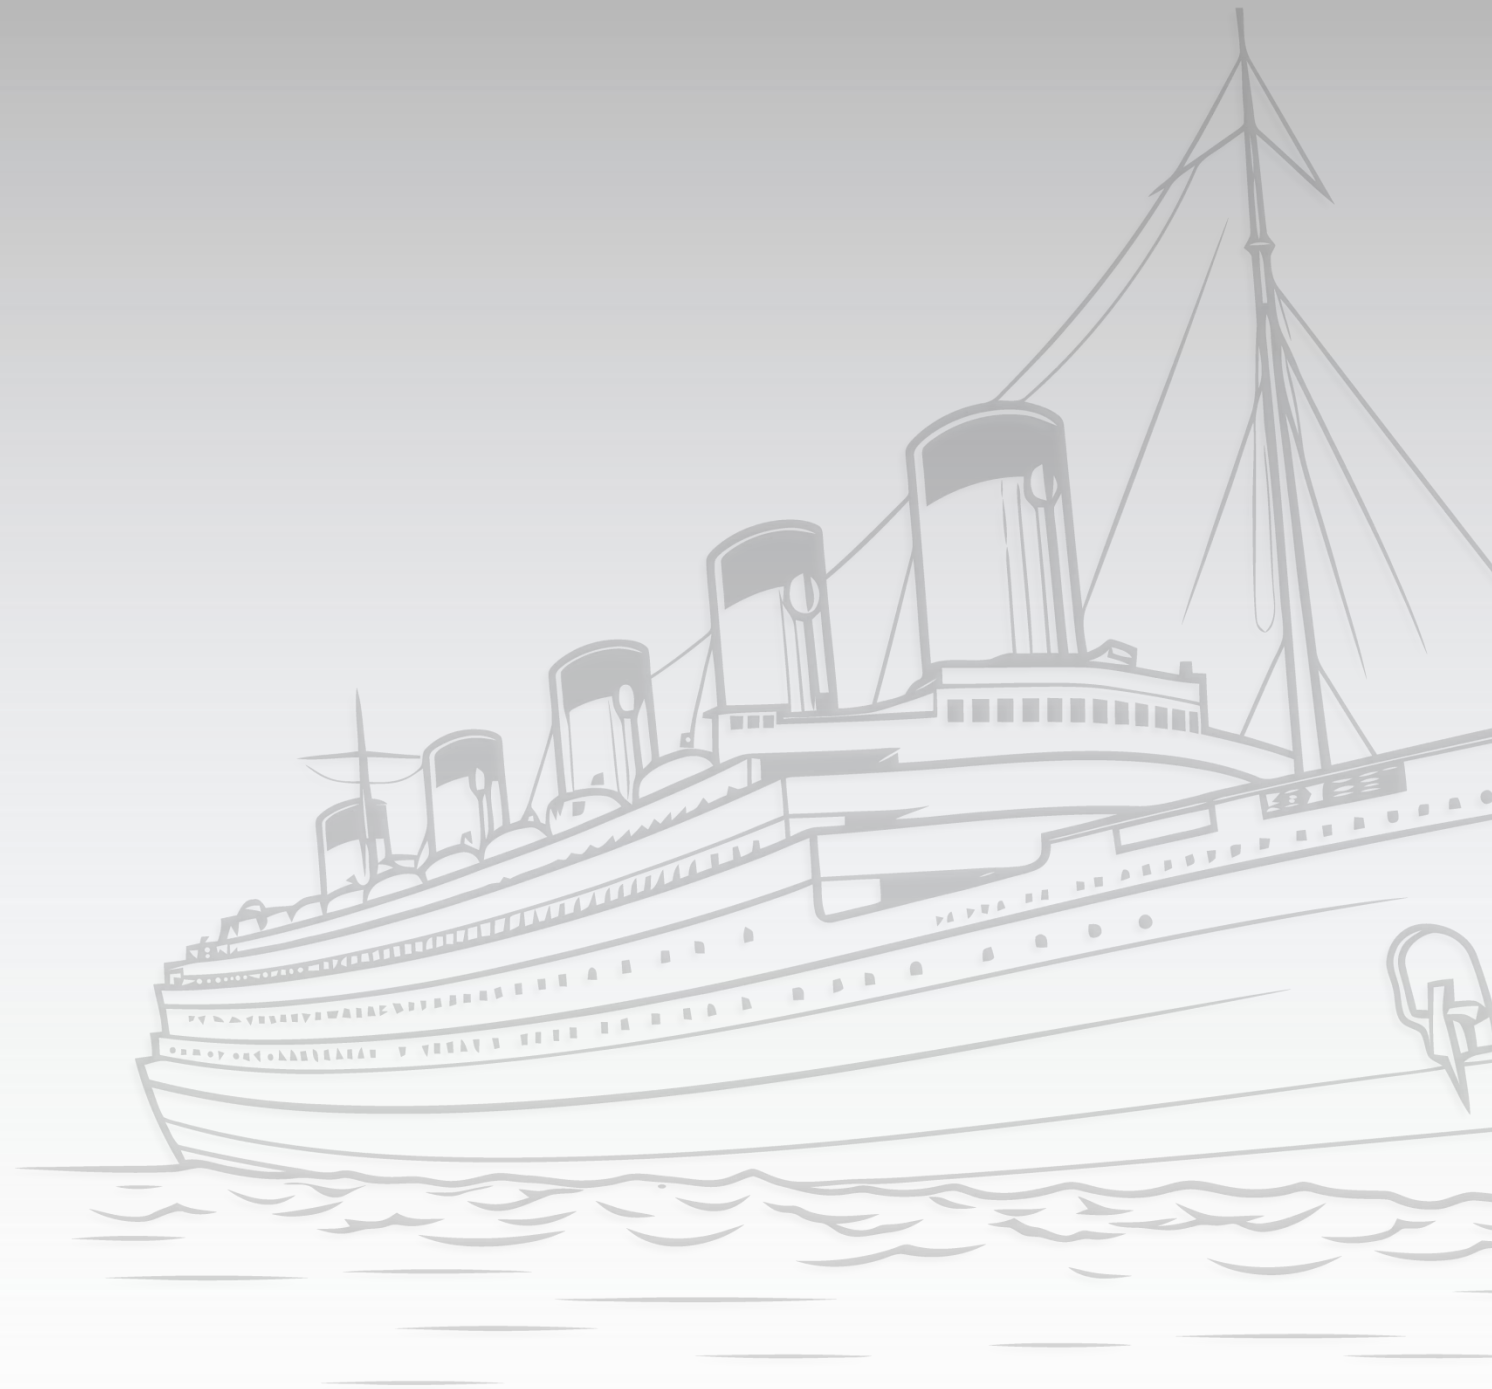


### Product Description

- IP68 waterprof.
- 316 stainless steel or bronze material.
- Surface mounting installation, easy to install and maintain.
- Various color options: 6500K, blue, RGB 3in1, RGBW 4in1.
- Perfect for yacht, boat, swimming pool and underwater lighting.
- Support PWM dimming.







Product Code	Power	LED Qty	Voltage	Beam Angle	Lumen	Color	Dimming	IP
AL-YC01-6CR-60	6x5W	6	12-24VDC	90°	912lm	3000K 6000K	PWM	68
AL-YC01-6CR-BL	6x5W	6	12-24VDC	90°	146lm	Blue	PWM	68
AL-YC01-6CR-RGB	6x9W	6	12-24VDC	90°	730lm	RGB 3in1	PWM	68
AL-YC01-6CR-RGBW	6x12W	6	12-24VDC	90°	1023lm	RGBW 4in1	PWM	68

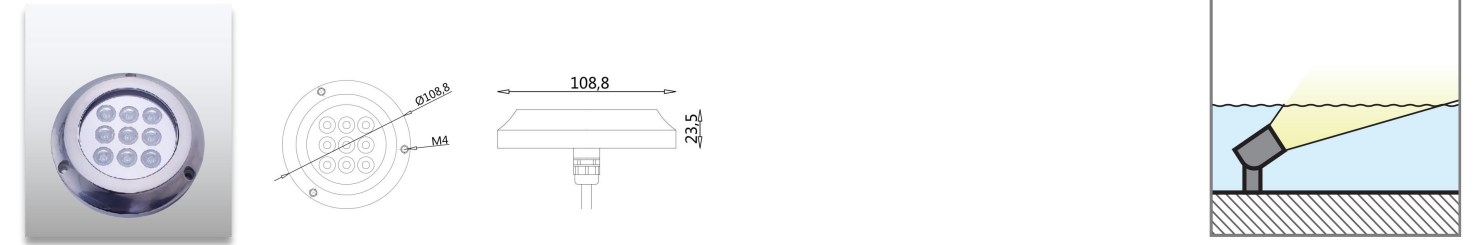

Product Code	Power	LED Qty	Voltage	Beam Angle	Lumen	Color	Dimming	IP
AL-YC01-9CR-60	17W	6	12-24VDC	10°	1744lm	3000K 6000K	PWM	68
AL-YC01-9CR-BL	17W	6	12-24VDC	10°	157lm	Blue	PWM	68
AL-YC01-9CR-RGB	17W	6	12-24VDC	10°	887lm	RGB 3in1	PWM	68
AL-YC01-9CR-RGBW	24W	6	12-24VDC	10°	1225lm	RGBW 4in1	PWM	68

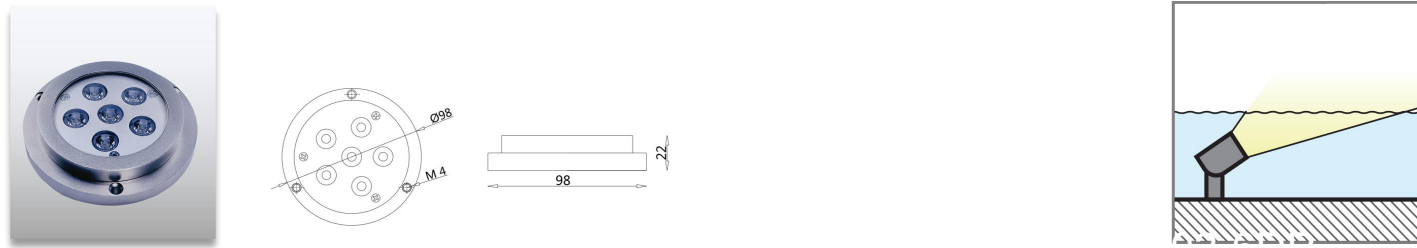


Product Code	Power	LED Qty	Voltage	Beam Angle	Lumen	Color	Dimming	IP
AL-YC02-6DP	17W	6	12-24VDC	10°	829lm	RGBW 4in1	PWM	68

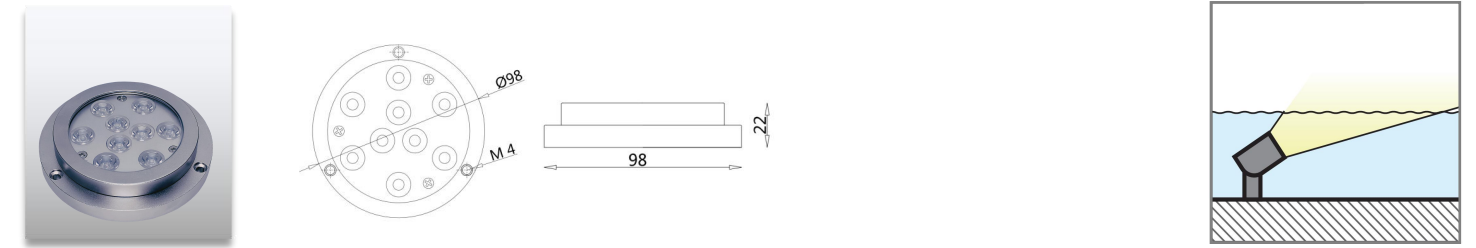

Product Code	Power	LED Qty	Voltage	Beam Angle	Lumen	Color	Dimming	IP
AL-YC02-9DP	14W	9	12-24VDC	10°	1079lm	3000K 6000K	PWM	68
AL-YC02-9DP-BL	14W	9	12-24VDC	10°	345m	Blue	PWM	68
AL-YC02-9DP-RGB	17W	9	12-24VDC	10°	910lm	RGB	PWM	68



Product Code	Power	LED Qty	Voltage	Beam Angle	Lumen	Color	Dimming	IP
AL-YC03-3CR-60	3W	3	12VDC	80°	188	6000K	PWM	68
AL-YC03-3CR-BL	3W	3	12VDC	80°	20	Blue	PWM	68
AL-YC03-3CR-RGB	3W	3	12VDC	80°	107	RGB	PWM	68

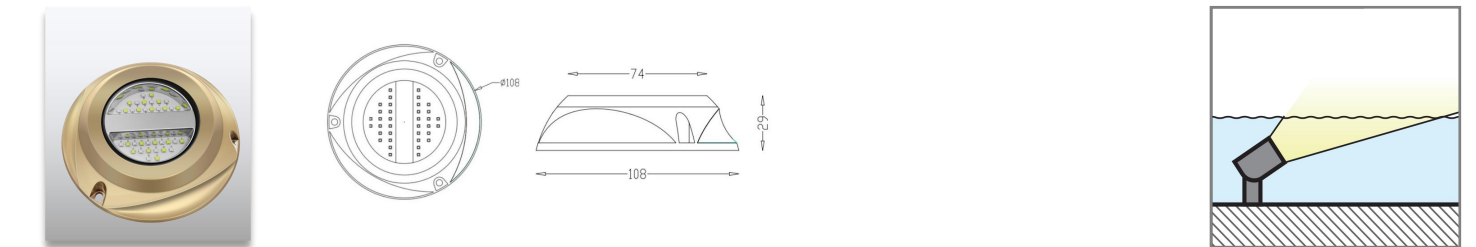

Product Code	Power	LED Type	Voltage	Beam Angle	Material	Color	Dimming	IP
AL-YC04-6BP	80W	SMD	12-24VDC	120°	Bronze	6500K	PWM	68


LED Bollard Light




Product Description

- IP65 for outdoor lighting applications.
- It's designed to illuminate paths, pedestrian or vehicular and landscape projects.
- Body in die-casting aluminum with powder coating.
- 2700K, 3000K, 4000K, 6000K, CRI 90+.
- 5 years warranty.
- CE, ROHS, UKCA certified.





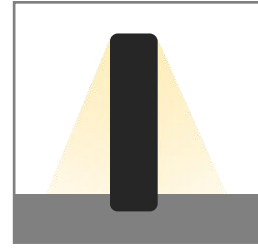


Product Code	Power	Installation	Voltage	Beam Angle	Finish Color	Color	IK	IP
AL-8H170	7W	In-ground	12/24VDC 120-240VAC	120°	White Black	Single	05	67

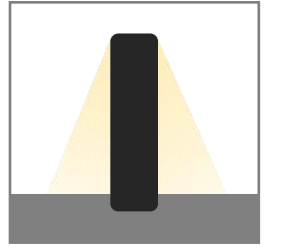



Product Code	Power	Installation	Voltage	Beam Angle	Finish Color	Color	IK	IP
AL-8H95	7W	In-ground	12/24VDC 120-240VAC	120°	White Black	Single	05	67

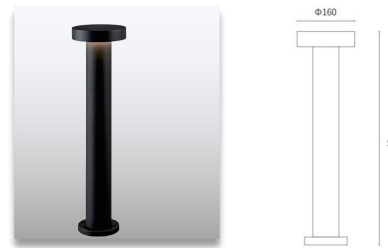



Product Code	Power	Installation	Voltage	Beam Angle	Finish Color	Color	IK	IP
AL-8H160	7W	In-ground	12/24VDC 120-240VAC	120°	White Black	Single	05	67



Product Code	Power	Installation	Voltage	Beam Angle	Finish Color	Color	IK	IP
AL-8H70	7W	In-ground	12/24VDC 120-240VAC	120°	White Black	Single	05	67

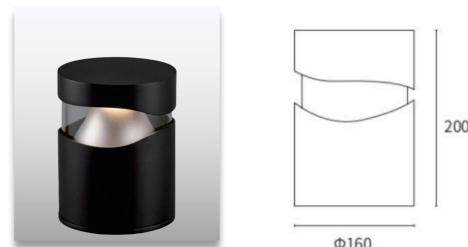

Product Code	Power	Installation	Voltage	Beam Angle	Finish Color	Color	IK	IP
AL-8H160B	10W	In-ground	12/24VDC 120-240VAC	120°	White Black	Single	05	67

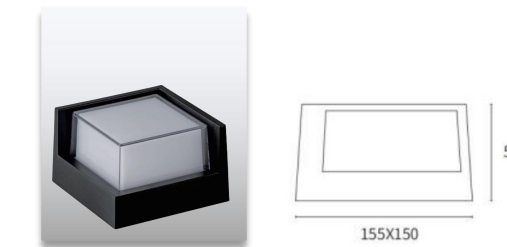



Product Code	Power	Installation	Voltage	Beam Angle	Finish Color	Color	IK	IP
AL-8H155S	9W	In-ground	12/24VDC 120-240VAC	120°	White Black	Single	05	67




### Product Description

- IP65 for outdoor lighting applications.
- It's designed to illuminate paths, pedestrian or vehicular and landscape projects.
- Body in die-casting aluminum with powder coating.
- 2700K, 3000K, 4000K, 6000K, CRI 90+.
- 5 years warranty.
- CE, ROHS, UKCA certified.

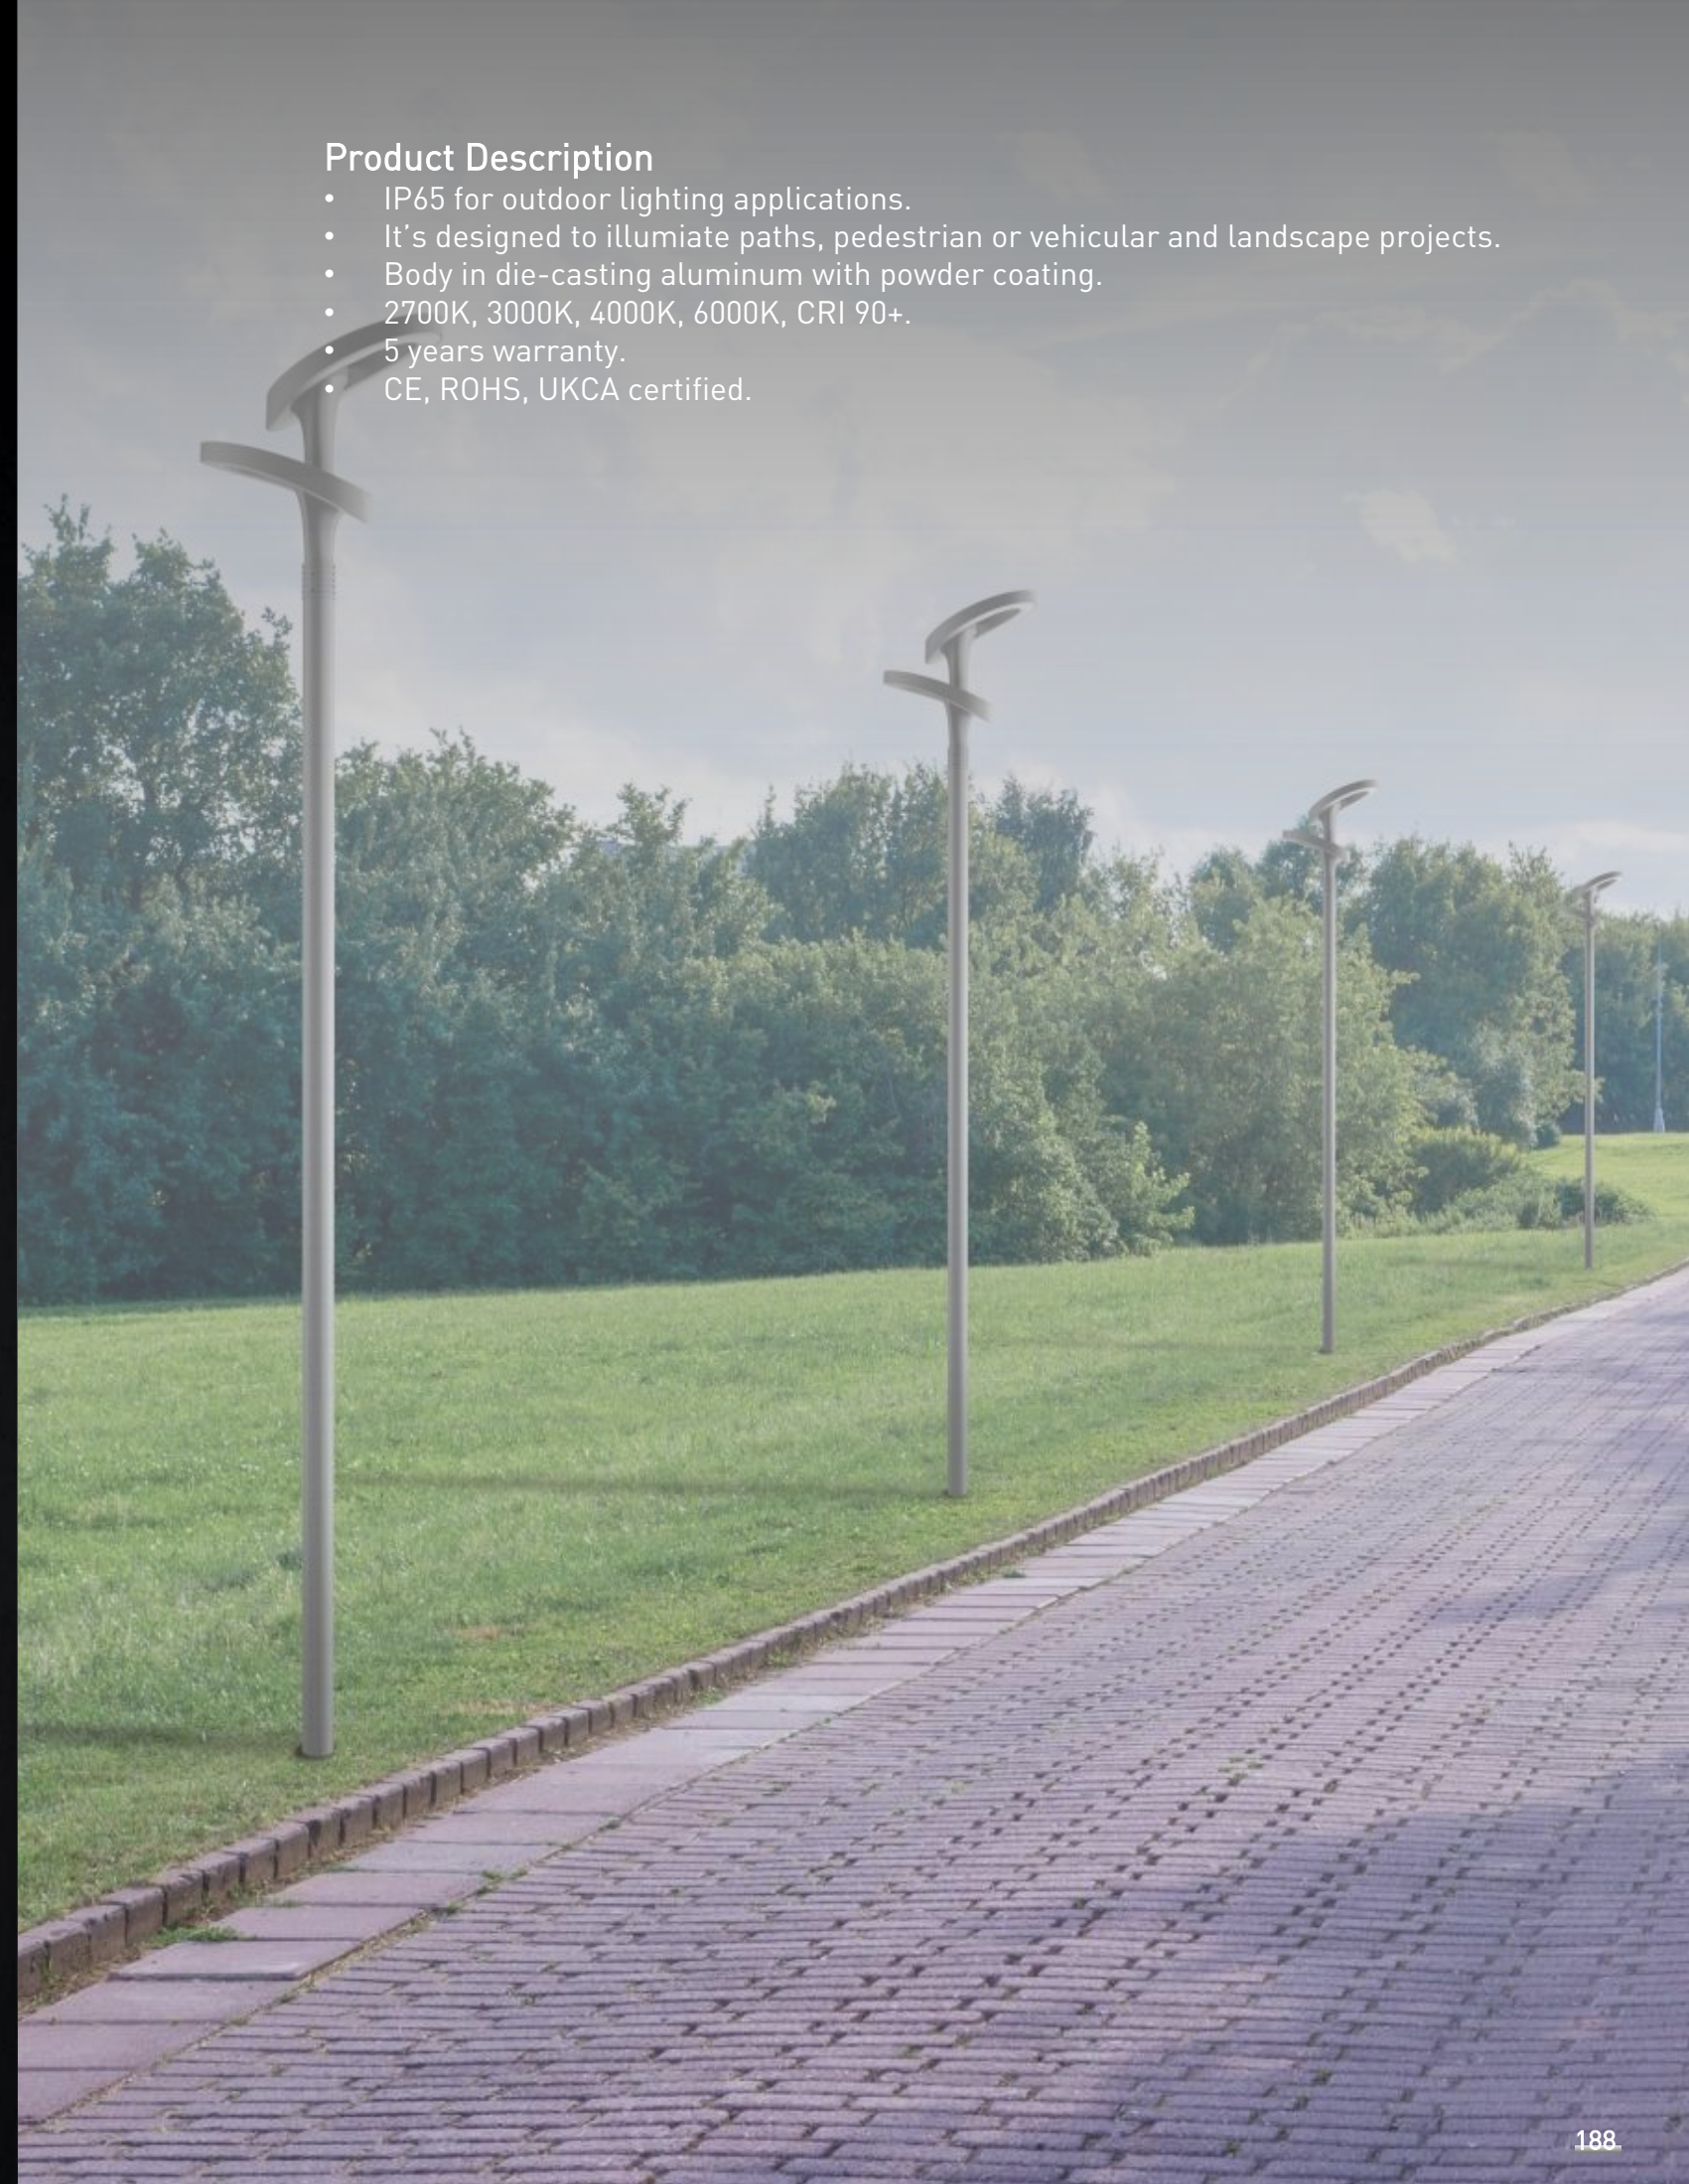


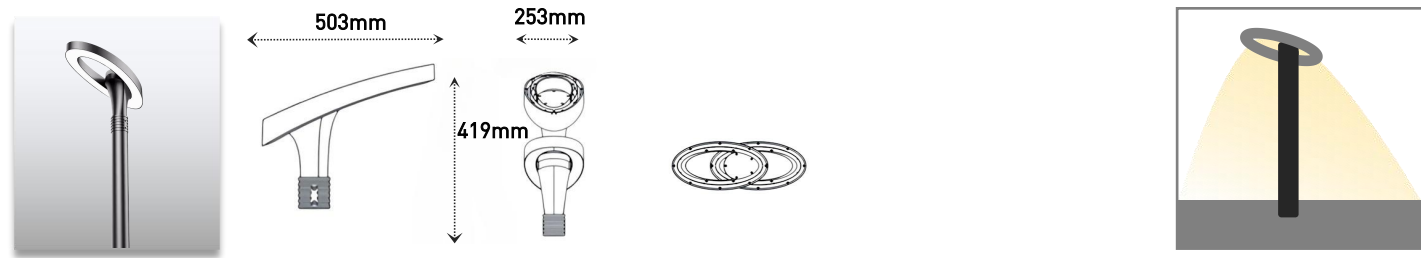

Product Code	Power	Efficiency	Voltage	LED	Color Temperature	Driver Brand	CRI	IP
AL-PP06-30W	30W	110-120lm/W	AC85-265V	Philips 3030	3000K-6000K	Meanwell	80	65

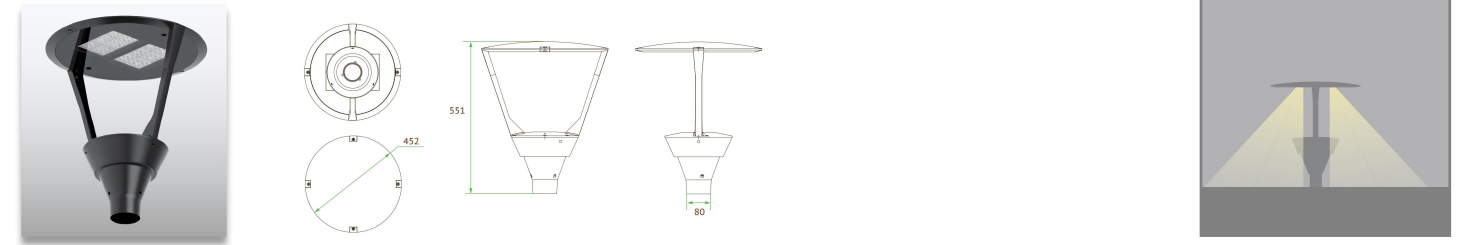


Product Code	Power	Voltage	Color Temperature	Beam Angle	Flux	Efficiency	CRI	IP
AL-PP08-75W	75W	AC85-305V	2700K-6500K	polariscope 45 symmetrical 60°/ 90°	>9750lm	130lm/W	80	65

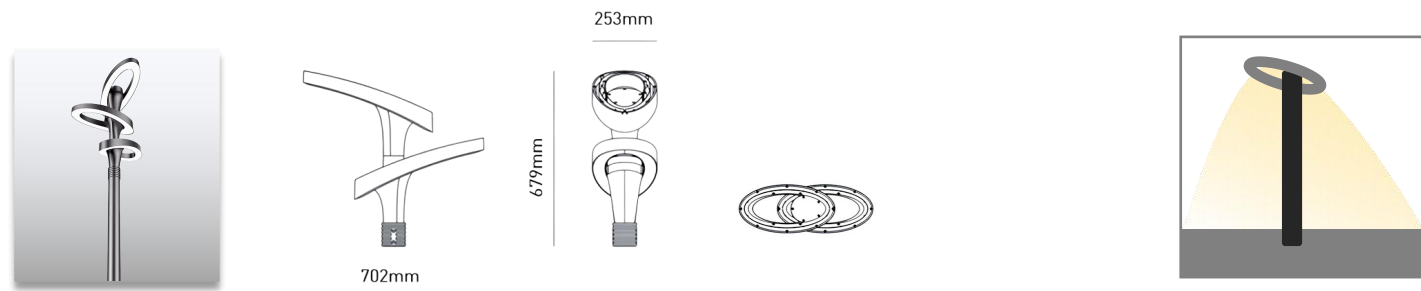

Product Code	Power	Efficiency	Voltage	LED	Color Temperature	Driver Brand	CRI	IP
AL-PP06-60W	30W	110-120lm/W	AC85-265V	Philips 3030	3000K-6000K	Meanwell	80	65



Product Code	Power	Voltage	Color Temperature	Beam Angle	Flux	Efficiency	CRI	IP
AL-PP08-100W	100W	AC85-305V	2700K-6500K	polariscope 45 symmetrical 60°/ 90°	>13000lm	130lm/W	80	65

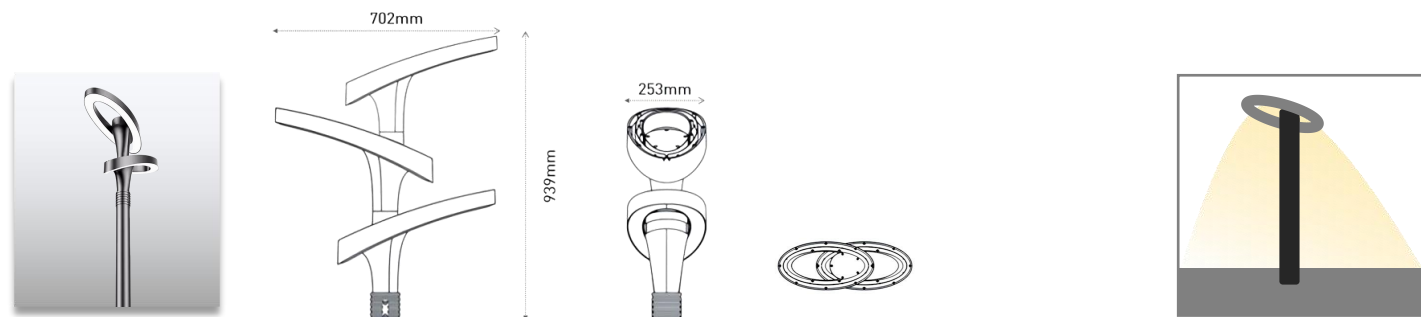


Product Code	Power	Efficiency	Voltage	LED	Color Temperature	Driver Brand	CRI	IP
AL-PP06-90W	30W	110-120lm/W	AC85-265V	Philips 3030	3000K-6000K	Meanwell	80	65




Product Code	Power	Voltage	Color Temperature	Beam Angle	Flux	Efficiency	CRI	IP
AL-PP08-120W	120W	AC85-305V	2700K-6500K	polariscope 45 symmetrical 60°/ 90°	>15600lm	130lm/W	80	65



## LED Wall Washer Light

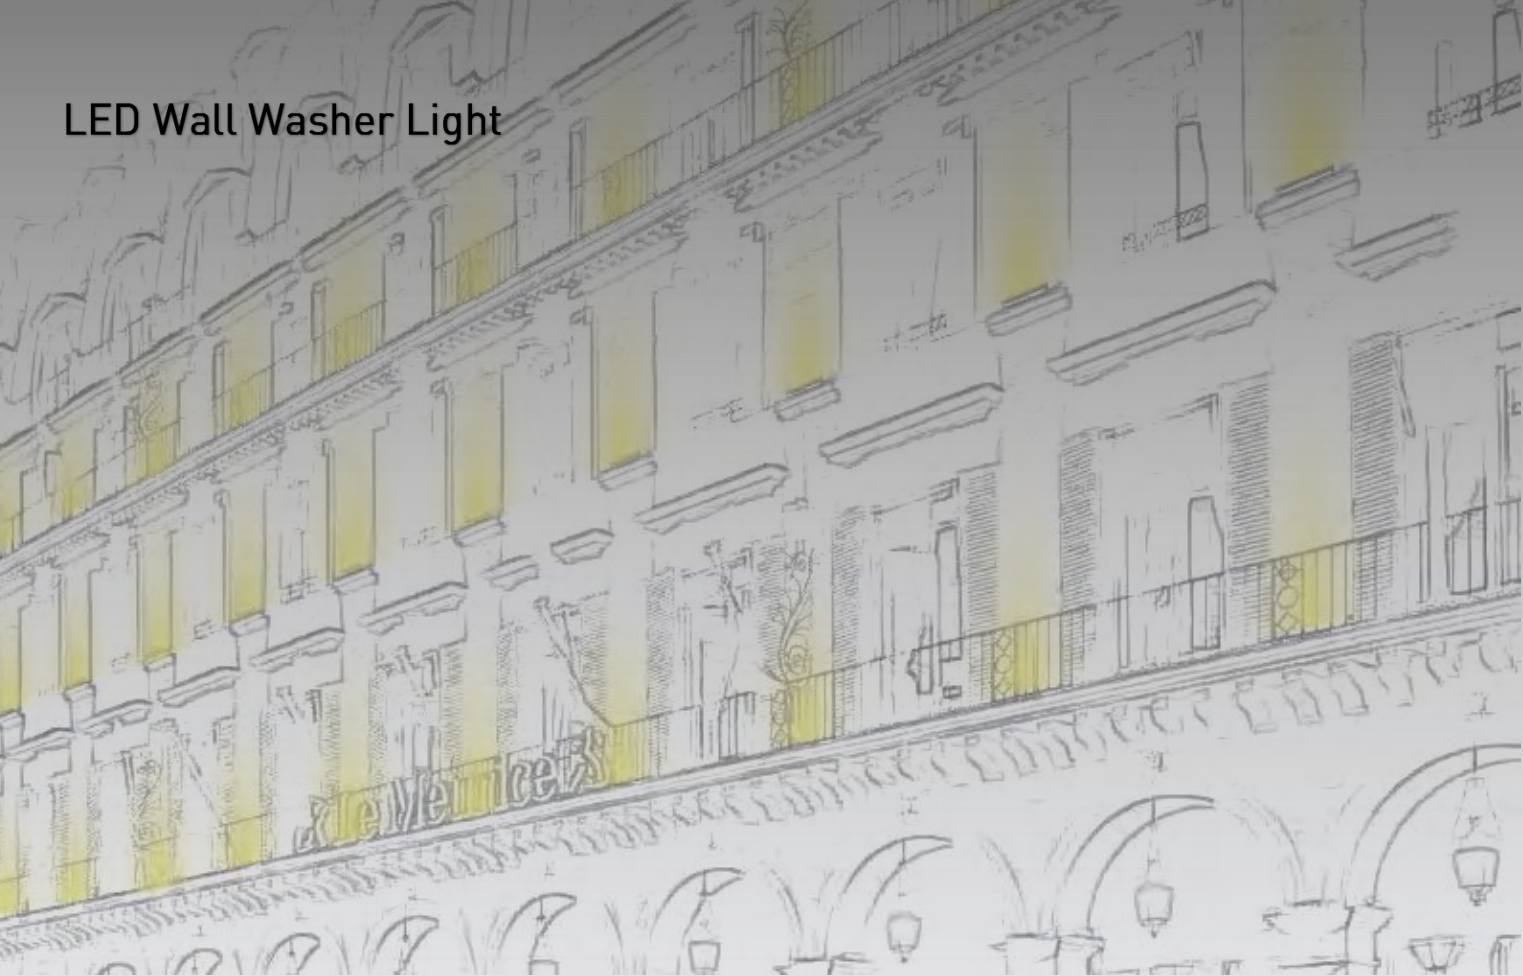


## Product Description

- IP65 for outdoor lighting applications.
- Support 0-10V, DALI and Triac dimming options.
- Body in die-casting aluminum with powder coating.
- 2700K, 3000K, 4000K, 6000K, CRI 90+.
- 5 years warranty.
- CE, ROHS, UKCA certified.

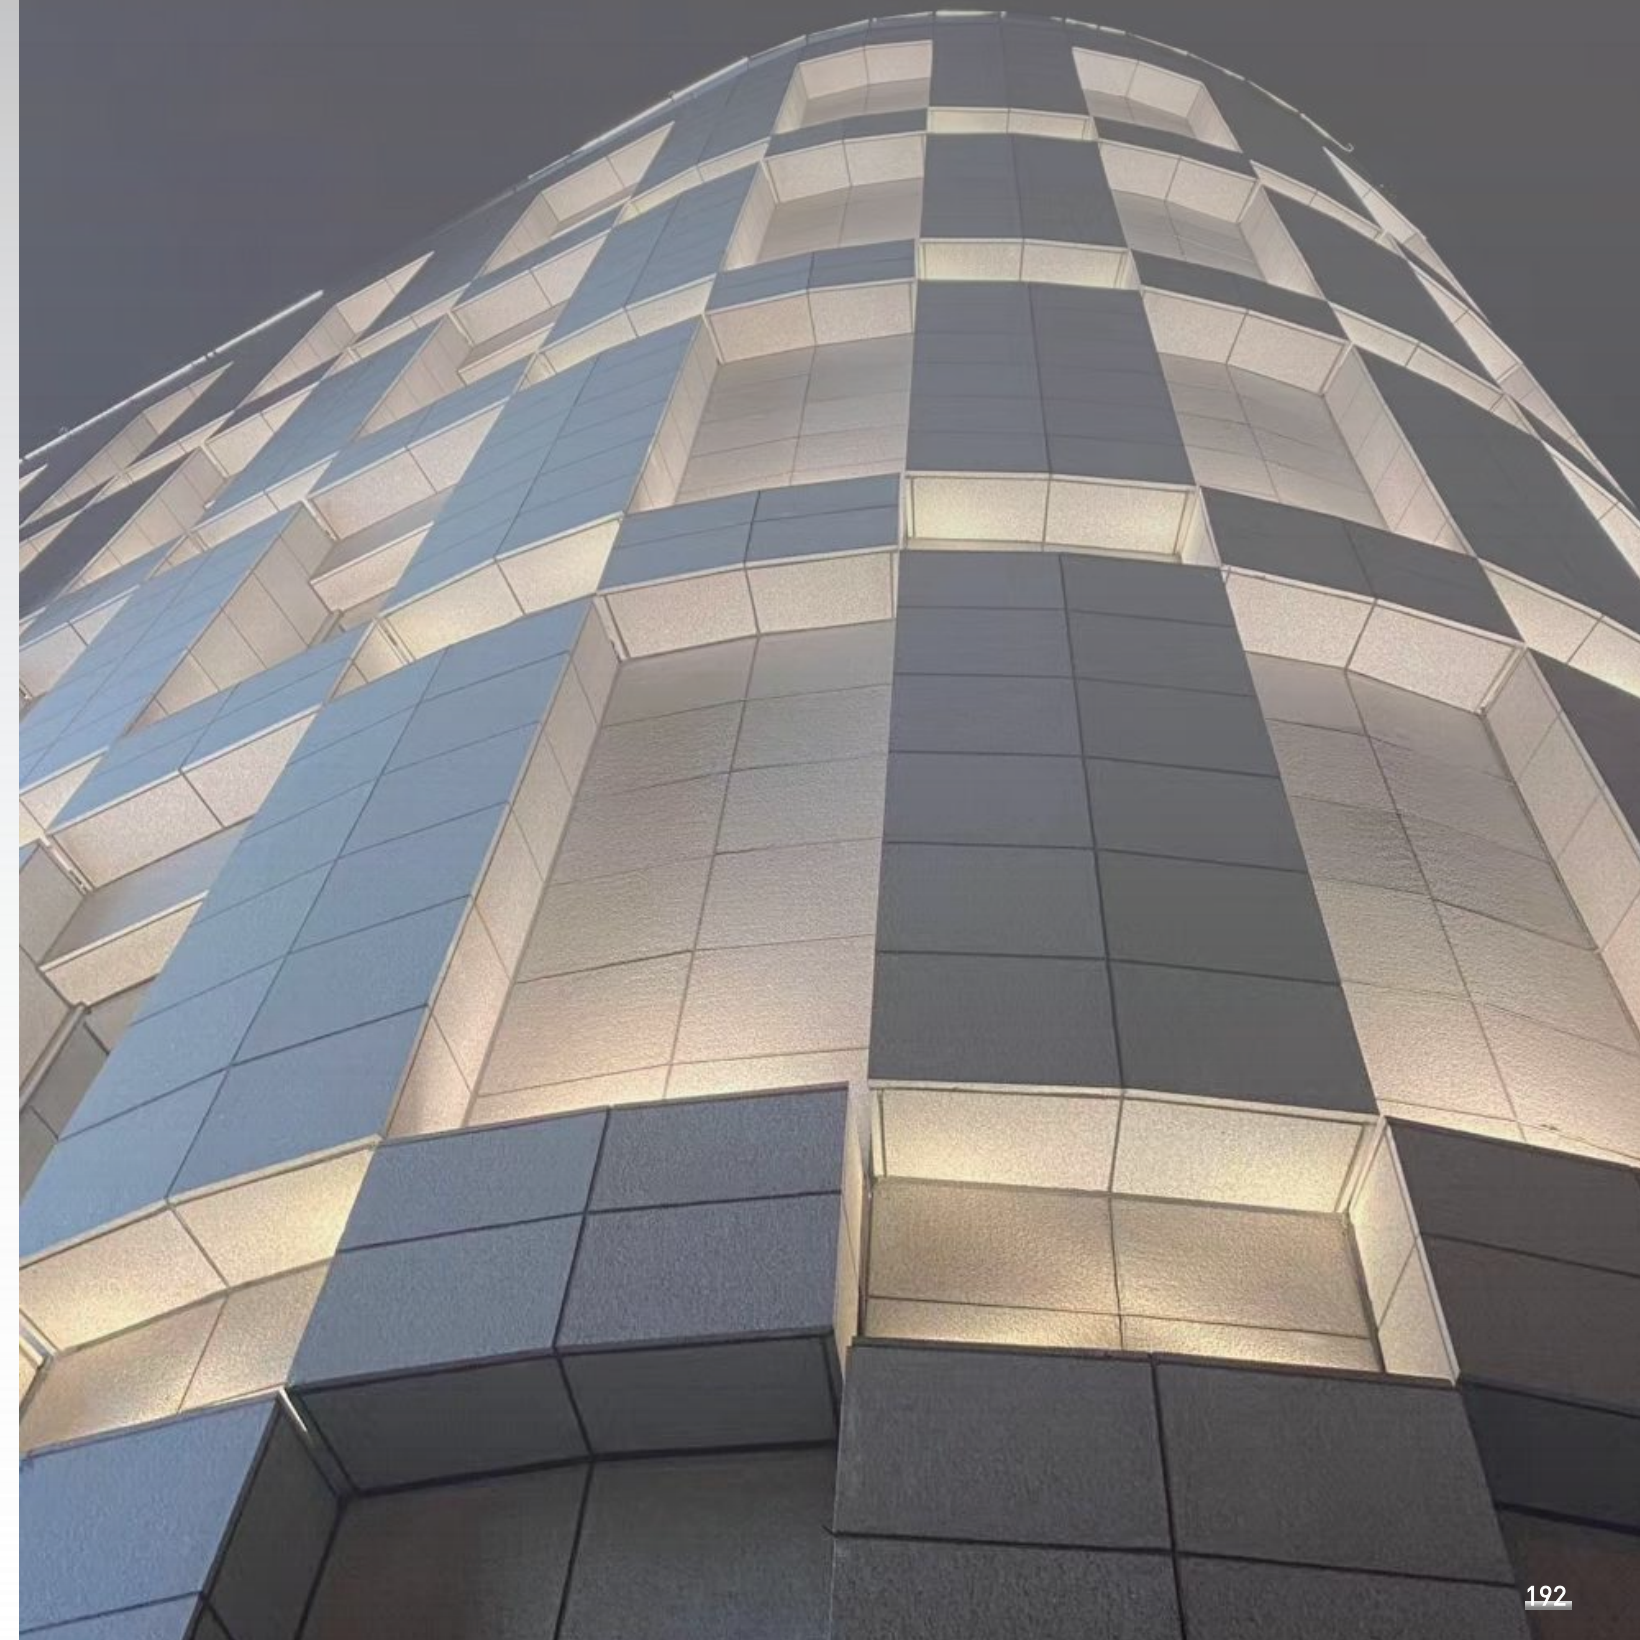


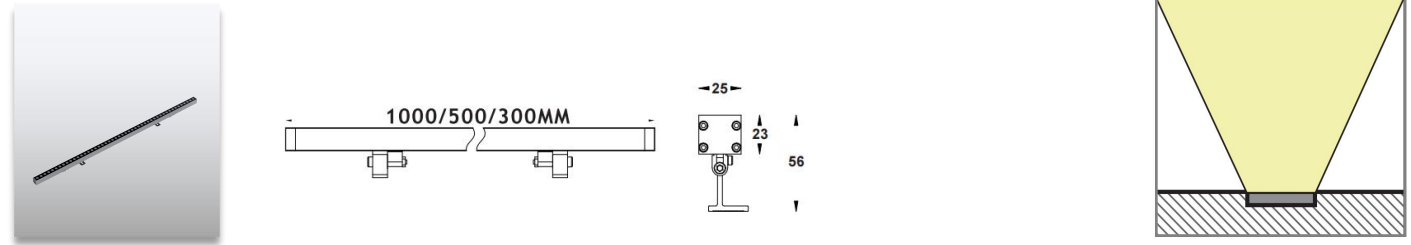


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-6025L	6~10W(0.3M)	CREE/OSRAM	12/24VDC	15°/20°/30°/45°/10*65°	700lm	Single	05	65
	9~14W(0.5M)		220-240VAC	15°/20°/30°/45°/10*65°	1100lm	Single		
	18~28W(1M)		220-240VAC	15°/20°/30°/45°/10*65°	2380lm	RGB 3in1		

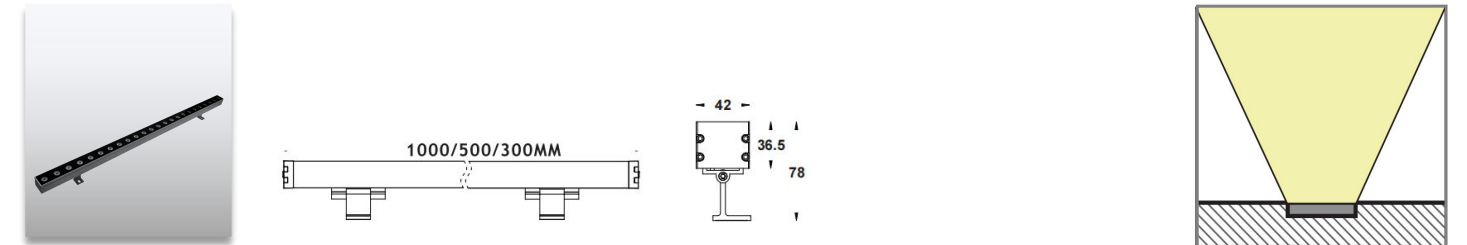


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-6042L	6~9W(0.3M)	CREE/OSRAM	12/24VDC 220-240VAC	10°/24°/36°/60°/15*45°/10*60°	720lm	Single	05	65
	12~18W(0.5M)		12/24VDC 220-240VAC	10°/24°/36°/60°/15*45°/10*60°	1400lm	Single		
	24~48W(1M)		12/24VDC 220-240VAC	10°/24°/36°/60°/15*45°/10*60°	3880lm	Single		
	24~60W(1M)		12/24VDC	10°/24°/36°/60°/15*45°/10*60°	1700lm	RGB 3in1		
	72W(1M)		12/24VDC	10°/24°/36°/60°/15*45°/10*60°	2500lm	RGBW 4in1		

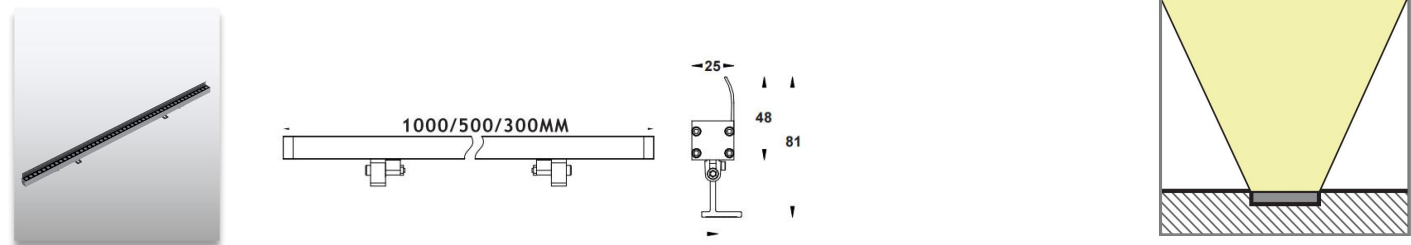


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-6025S	6~10W(0.3M)	CREE/OSRAM	12/24VDC	15°/20°/30°/45°/10*65°	700lm	Single	05	65
	9~14W(0.5M)		220-240VAC	15°/20°/30°/45°/10*65°	1100lm	Single		
	18~28W(1M)		220-240VAC	15°/20°/30°/45°/10*65°	2380lm	RGB 3in1		

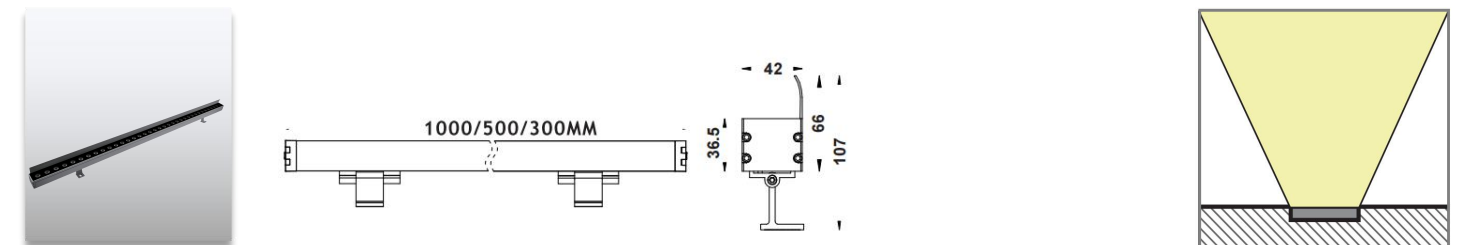

Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-6042S	6~9W(0.3M)	CREE/OSRAM	12/24VDC 220-240VAC	10°/24°/36°/60°/15*45°/10*60°	720lm	Single	05	65
	12~18W(0.5M)		12/24VDC 220-240VAC	10°/24°/36°/60°/15*45°/10*60°	1400lm	Single		
	24~48W(1M)		12/24VDC 220-240VAC	10°/24°/36°/60°/15*45°/10*60°	3880lm	Single		
	24~60W(1M)		12/24VDC	10°/24°/36°/60°/15*45°/10*60°	1700lm	RGB 3in1		
	72W(1M)		12/24VDC	10°/24°/36°/60°/15*45°/10*60°	2500lm	RGBW 4in1		

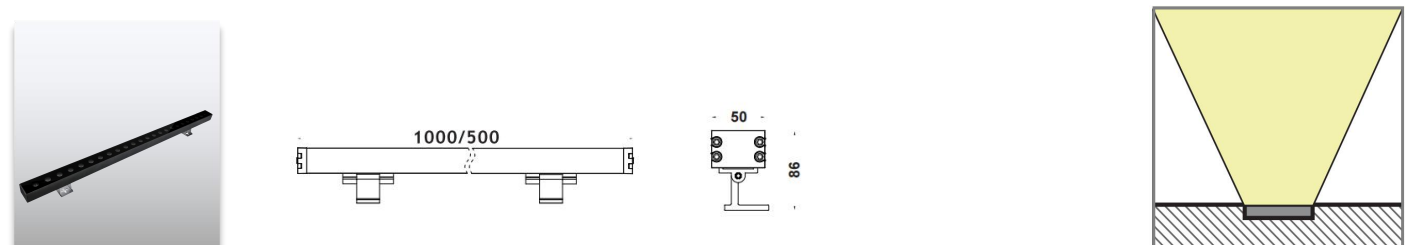


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-6050L	24W(0.5M)	CREE/OSRAM	12/24VDC 220-240VAC	10°/15°/30°/60°/15*45°/10*60°	1390lm	Single	05	65
	48W(1M)		12/24VDC 220-240VAC	10°/15°/30°/60°/15*45°/10*60°	2870lm	Single		
	60W(1M)		12/24VDC	10°/15°/30°/60°/15*45°/10*60°	1680lm	RGB 3in1		
	84W(1M)		12/24VDC	10°/15°/30°/60°/15*45°/10*60°	2350lm	RGBW 4in1		

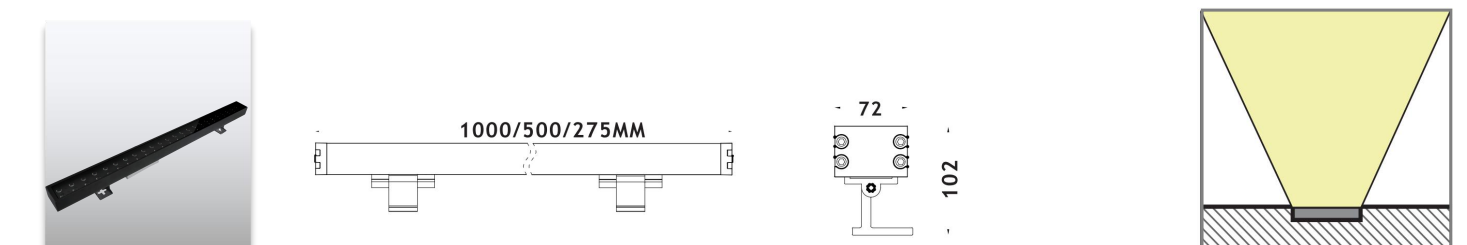


Product Code	Power	LED	Voltage	Beam Angle	Lumen	Color	IK	IP
AL-6072L	36W(0.5M)	CREE/OSRAM	12/24VDC 220-240VAC	10°/15°/30°/60°/15*45°/10*60°	2080lm	Single	05	65
	72W(1M)		12/24VDC 220-240VAC	10°/15°/30°/60°/15*45°/10*60°	4180lm	Single		
	108W(1M)		12/24VDC	10°/15°/30°/60°/15*45°/10*60°	3140lm	RGB 3in1		
	144W(1M)		12/24VDC	10°/15°/30°/60°/15*45°/10*60°	4180lm	RGBW 4in1		



## Flexible Solid LED Wall Washer Light

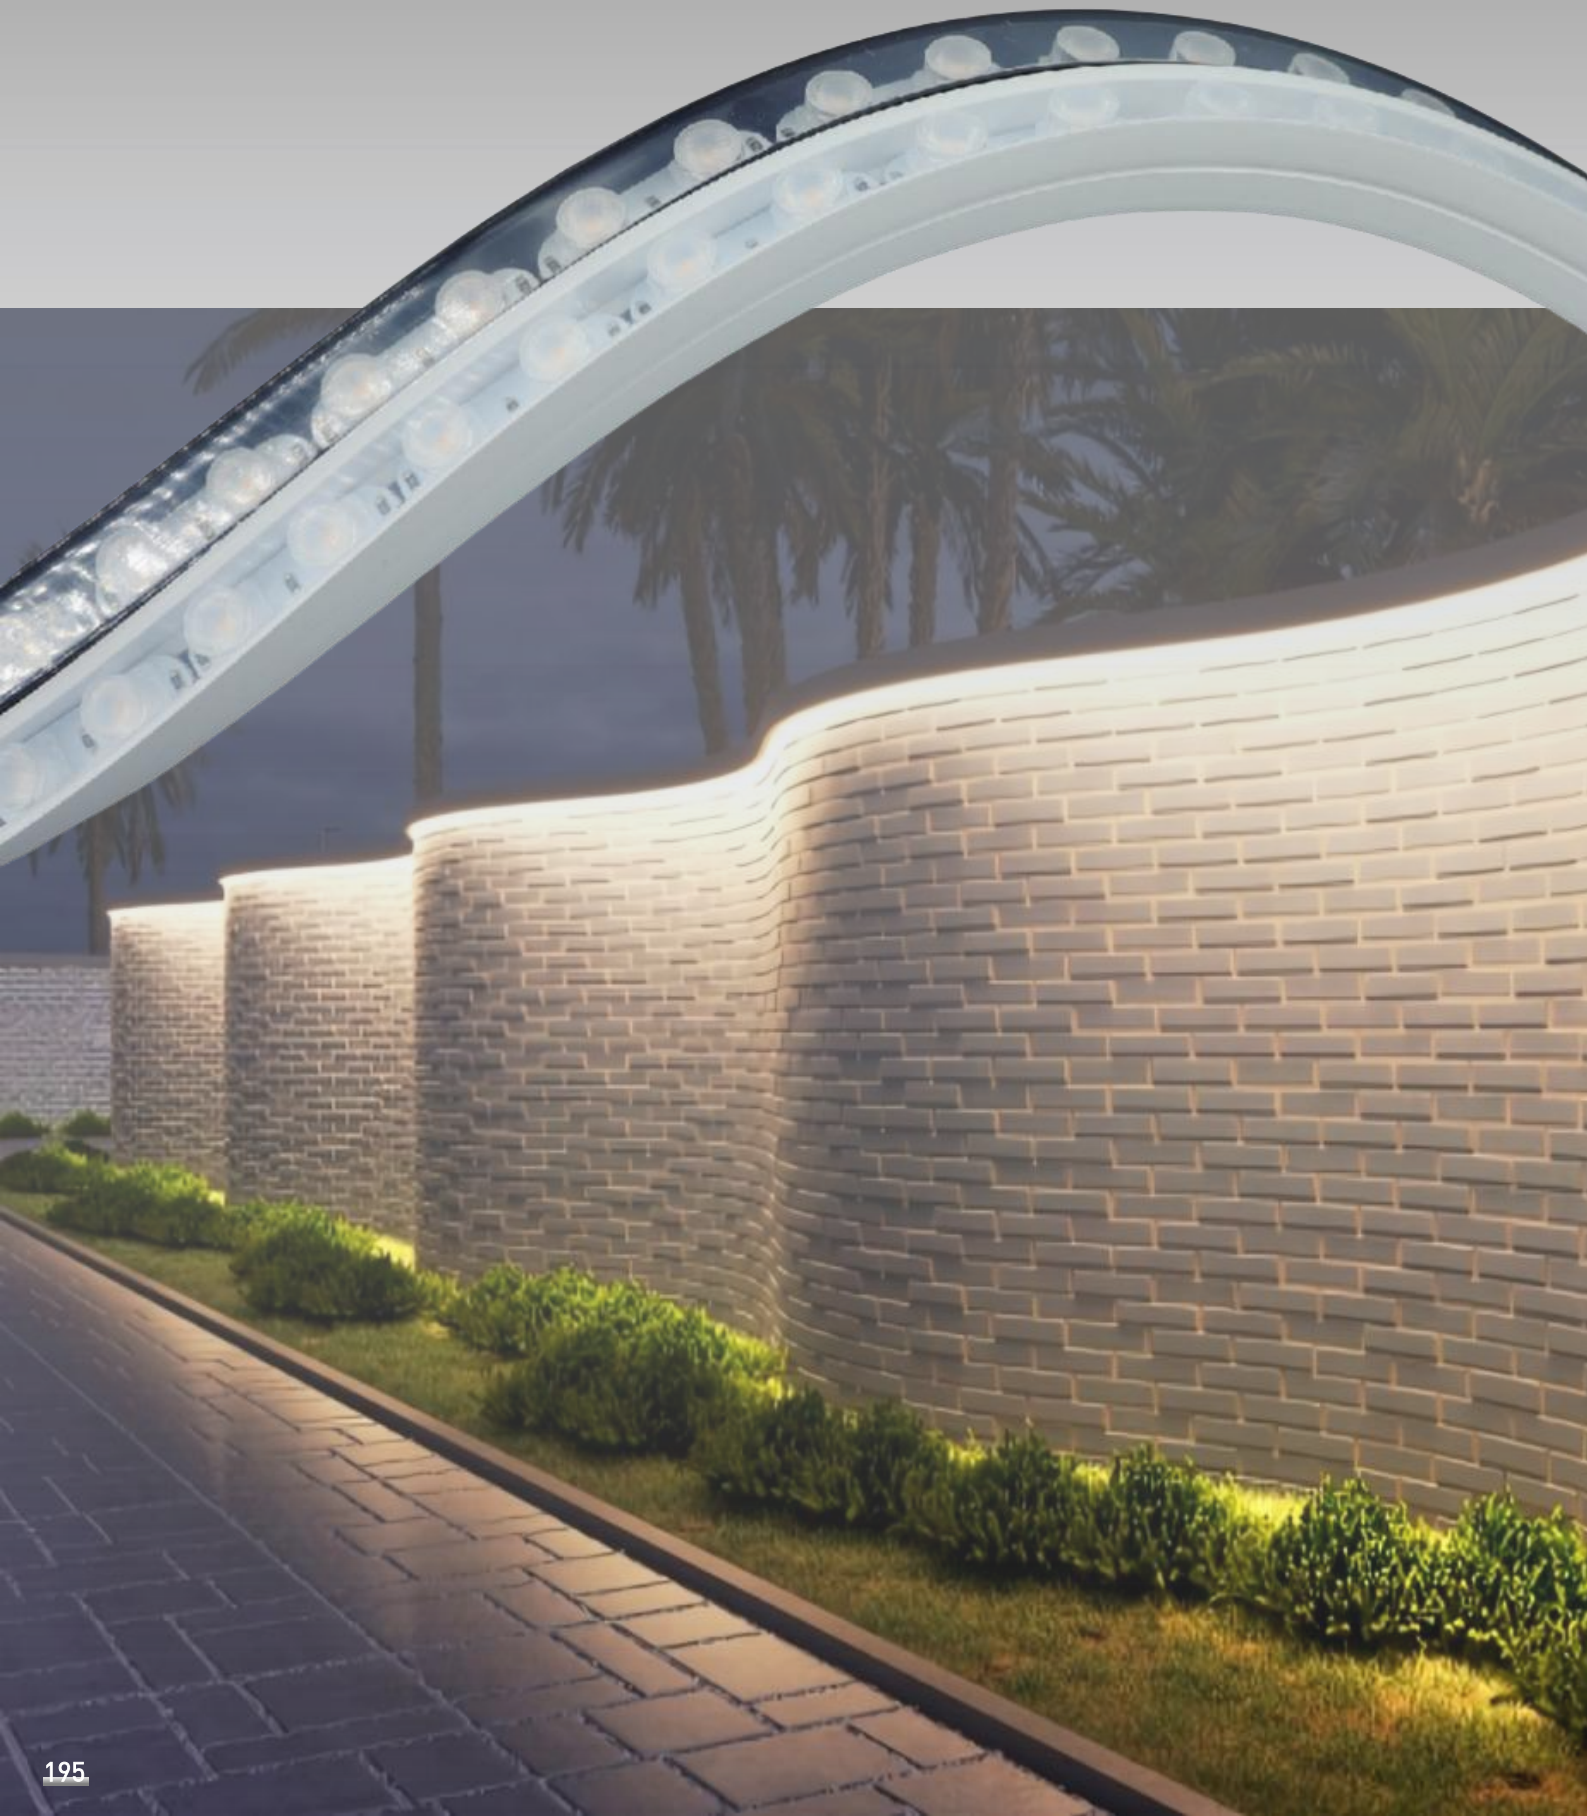




### Product Description

- The wall washer light is designed with uniform-width end caps that offering high luminous efficiency and consistent color temperature without light spots.
- IP66 waterproof for outdoor lighting.
- Made from high-quality flexible silicone material, the wall washer light offer strong tensile resistance, easy shapping, acid anad alkali corrosion resistance and high temperature durability.
- Rich choices for installation accessories: mounting clip, aluminum profile and adjustable bracket.
- 3D solid neon extrusion wall washer light.
- Various colors are optional: 2700K, 3000K, 4000K, 6500K, RGB and RGBW.
- Support DMX512 control.


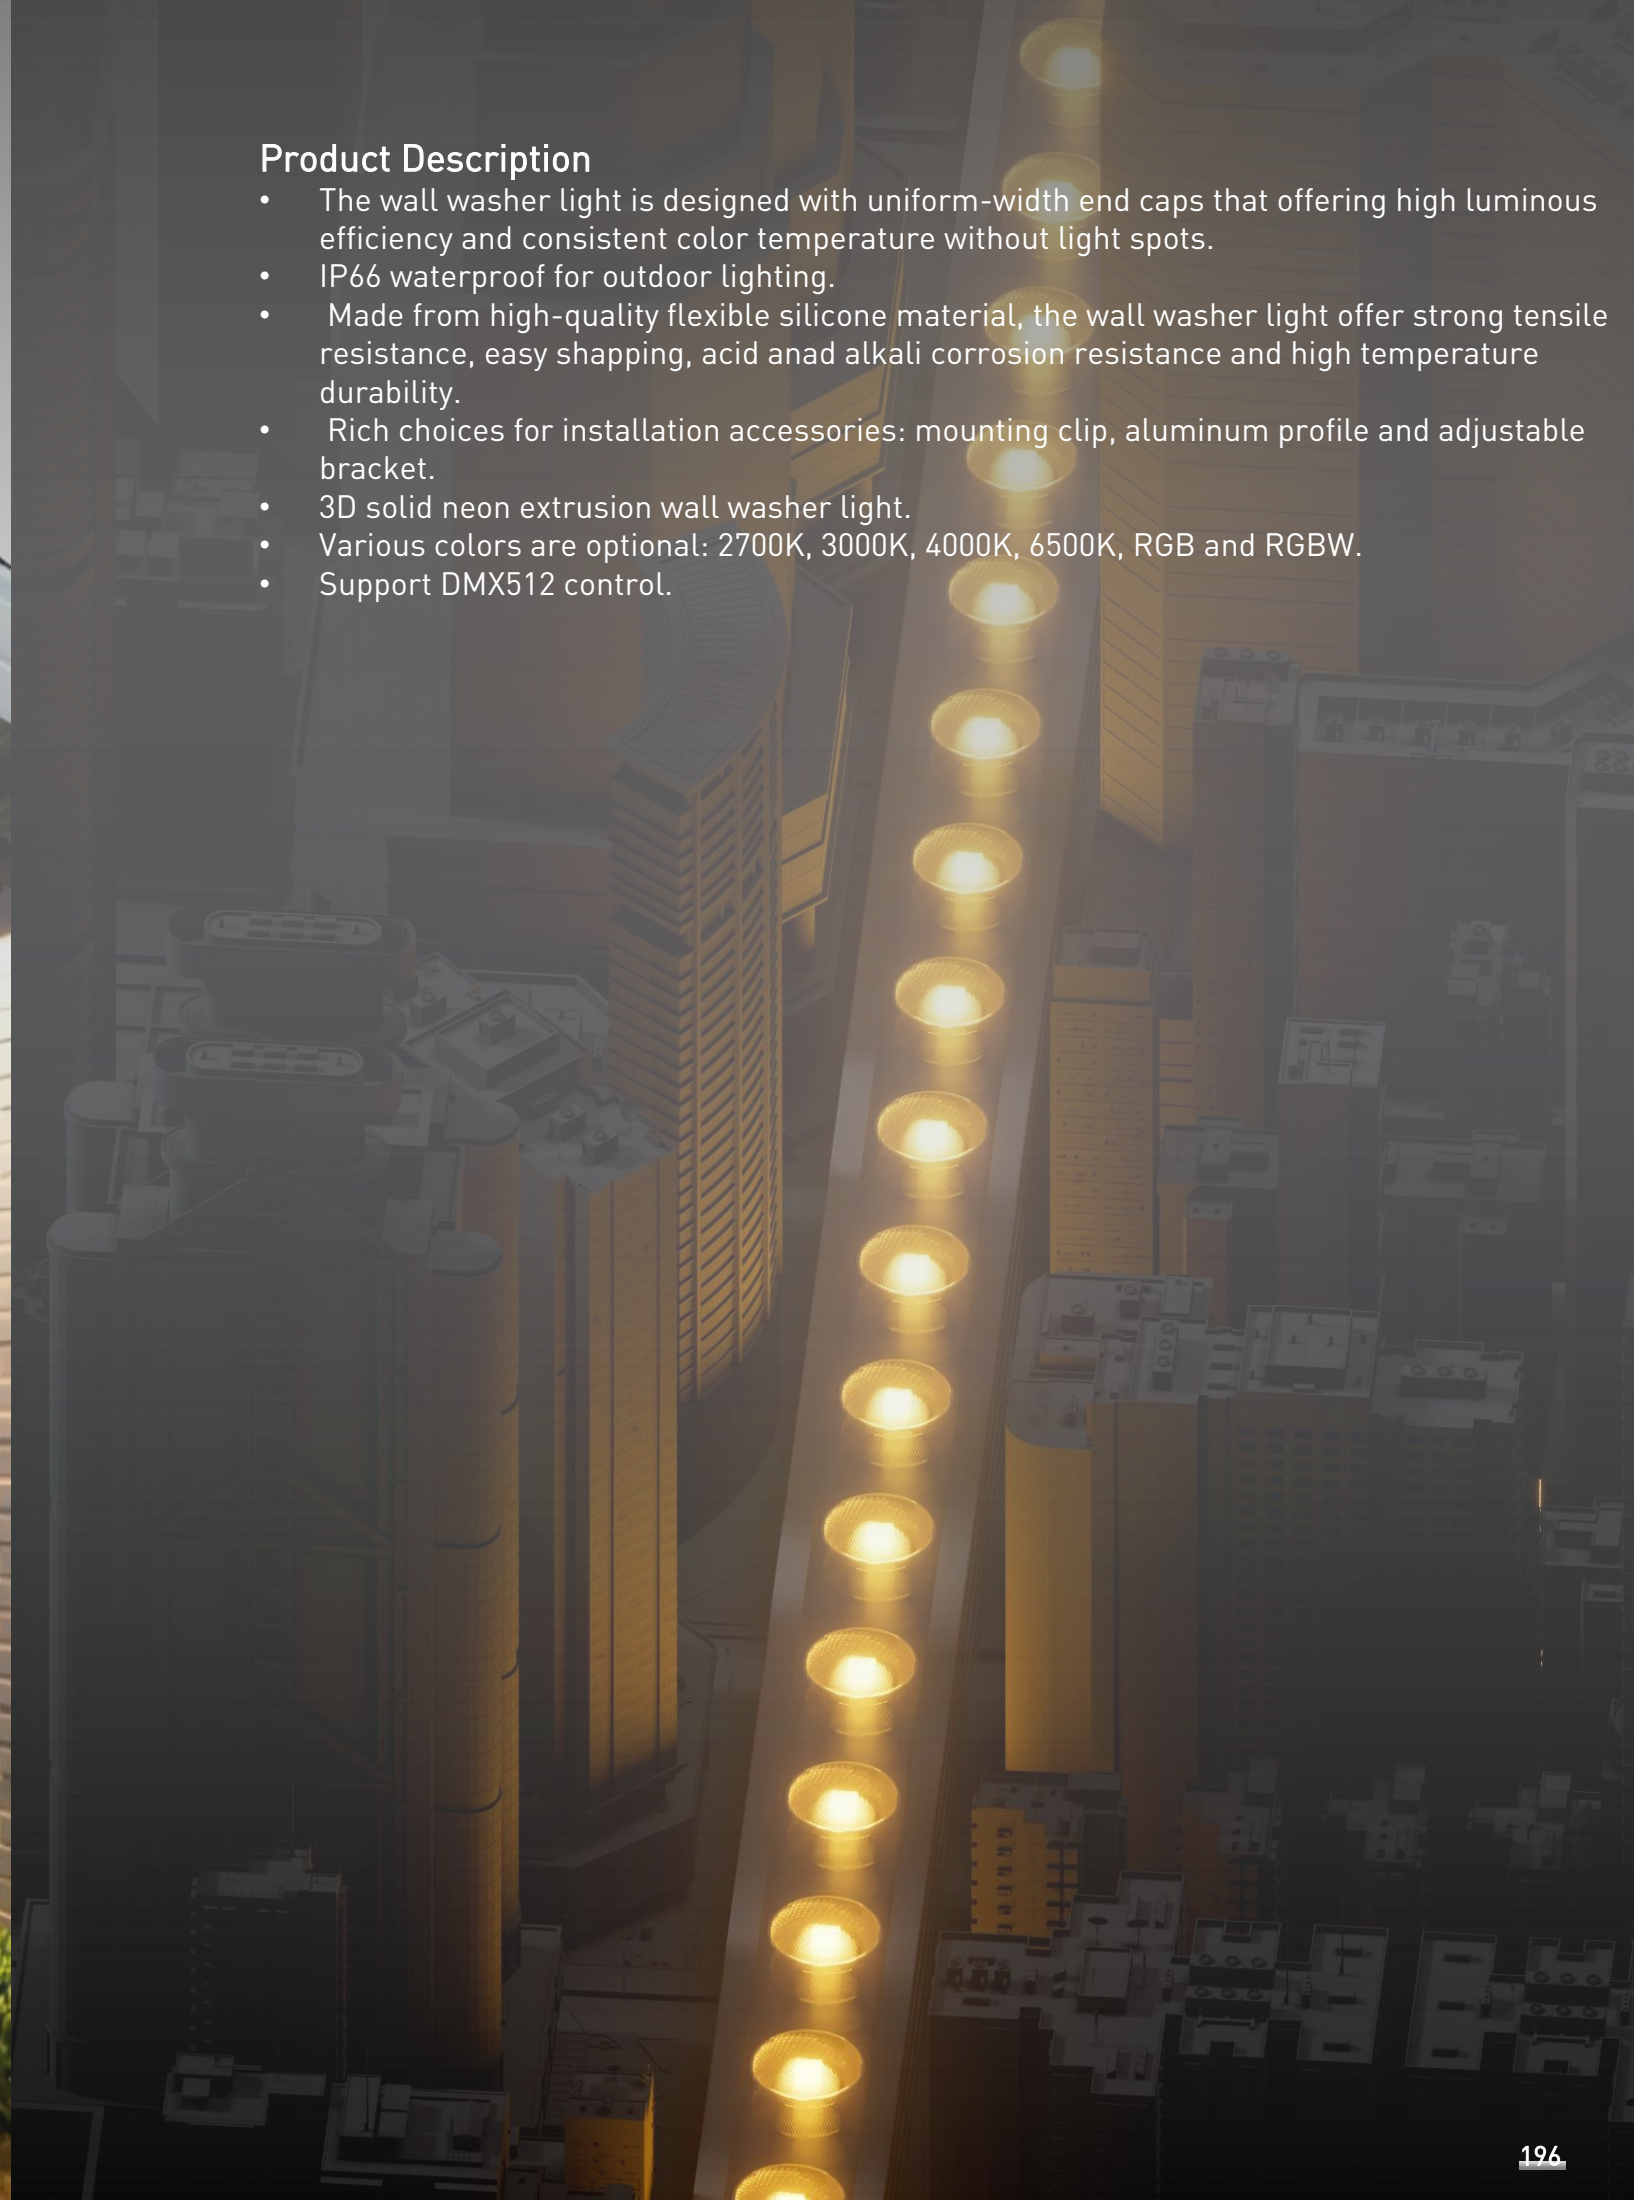


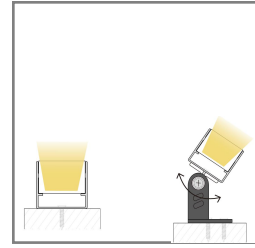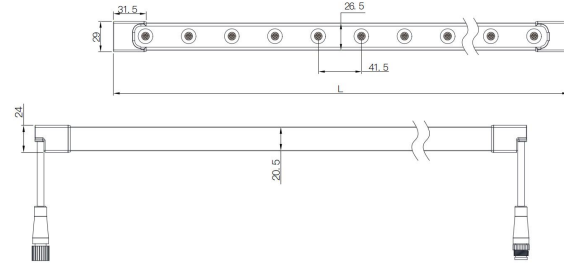





Product Code	Power	Color Temperature	Voltage	Beam Angle	FLux	Color	IK	IP
AL-6L2620	24W	2700K 3000K 4000K 6500K	24VDC	15°/30°/50°/20*35°/18*20°/20*55°	1500lm/M	Single RGB RGB 3in1 2700K+6500K	10	65

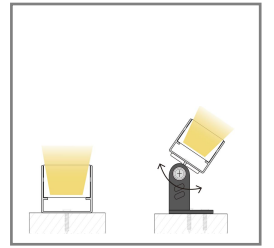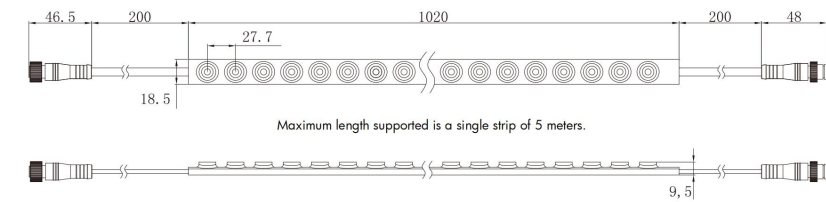



Product Code	Power	Color Temperature	Voltage	Beam Angle	FLux	Color	IK	IP
AL-6L3QT36	8.5W	3000K	24VDC	15°/30°/45°/15*60°	2100lm/M	RGBW	10	65

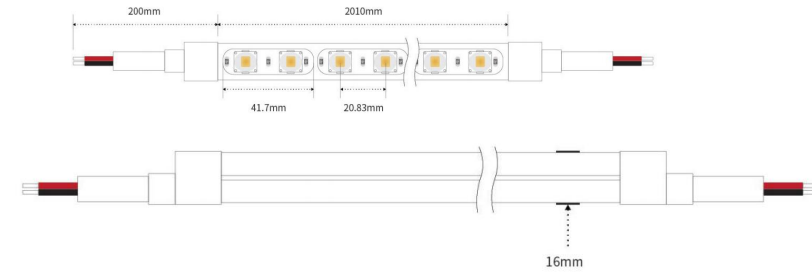


Product Code	Power	Color Temperature	Voltage	Beam Angle	FLux	Color	IK	IP
AL-6L1616	16W	2700K 3000K 4000K 6500K	24VDC	30°/30*45°	1630lm/M	Single RGB RGB 3in1	10	65

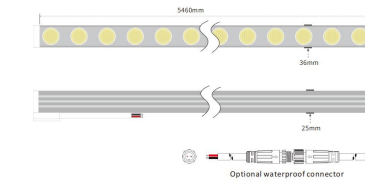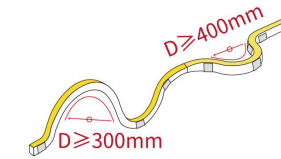

Product Code	Power	Voltage	Color Temperature	Beam Angle	Flux	Color	IK	IP
AL-6L3625-XX	24W	24VDC	2700K 3000K 4000K 6500K	20°/30°/25*45°	1940lm	Single	10	66
AL-6L3625-DMX512	24W	24VDC	2700K 3000K 4000K 6500K	20°/30°/25*45°	1700lm	Single	10	66
AL-6L3625RGB-DMX512	24W	24VDC	/	20°/30°/25*45°	/	RGB	10	66
AL-6L3625RGBW-DMX512	24W	24VDC	3000K	20°/30°/25*45°	/	RGBW	10	66

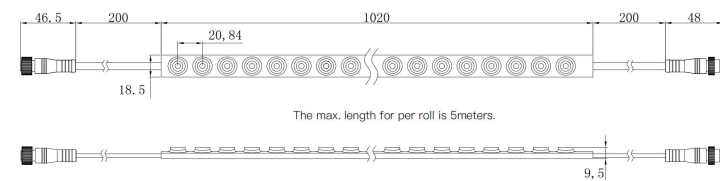




Product Code	Power	Color Temperature	Voltage	Beam Angle	FLux	Color	IK	IP
AL-6L2QT48	18W	2700K 3000K 4000K 6500K	24VDC	30°/45°/60°/20*35°/20*45°	2100lm/M	Single	10	65

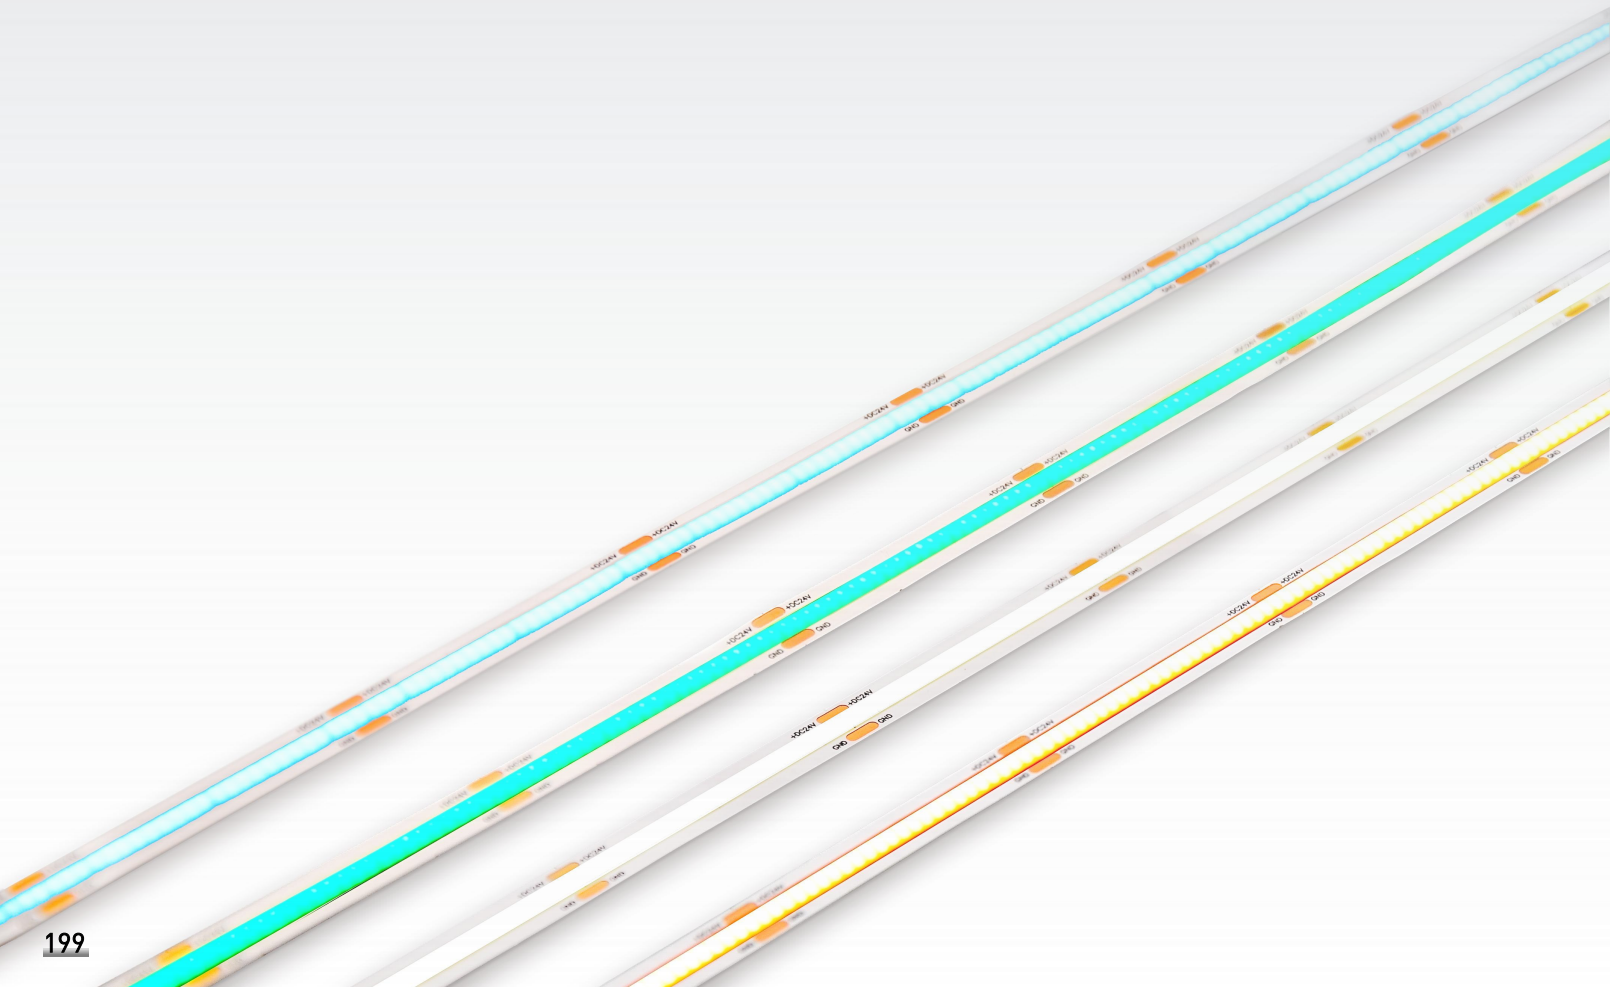



### Product Description

- Reel-to-reel PCB, no solder joints for whole reel, no more false soldering, accurate mounting length.
- Chips-on-board design, dot free even without any profiles.
- Excellent lighting with SDCM in 5-step.
- High efficiency, up to 110lm/W.
- Double layer 2oz PCB, for better flexibility, heat dissipation and voltage drop.
- IP20, IP65A, IP65B, IP67 and IP68.

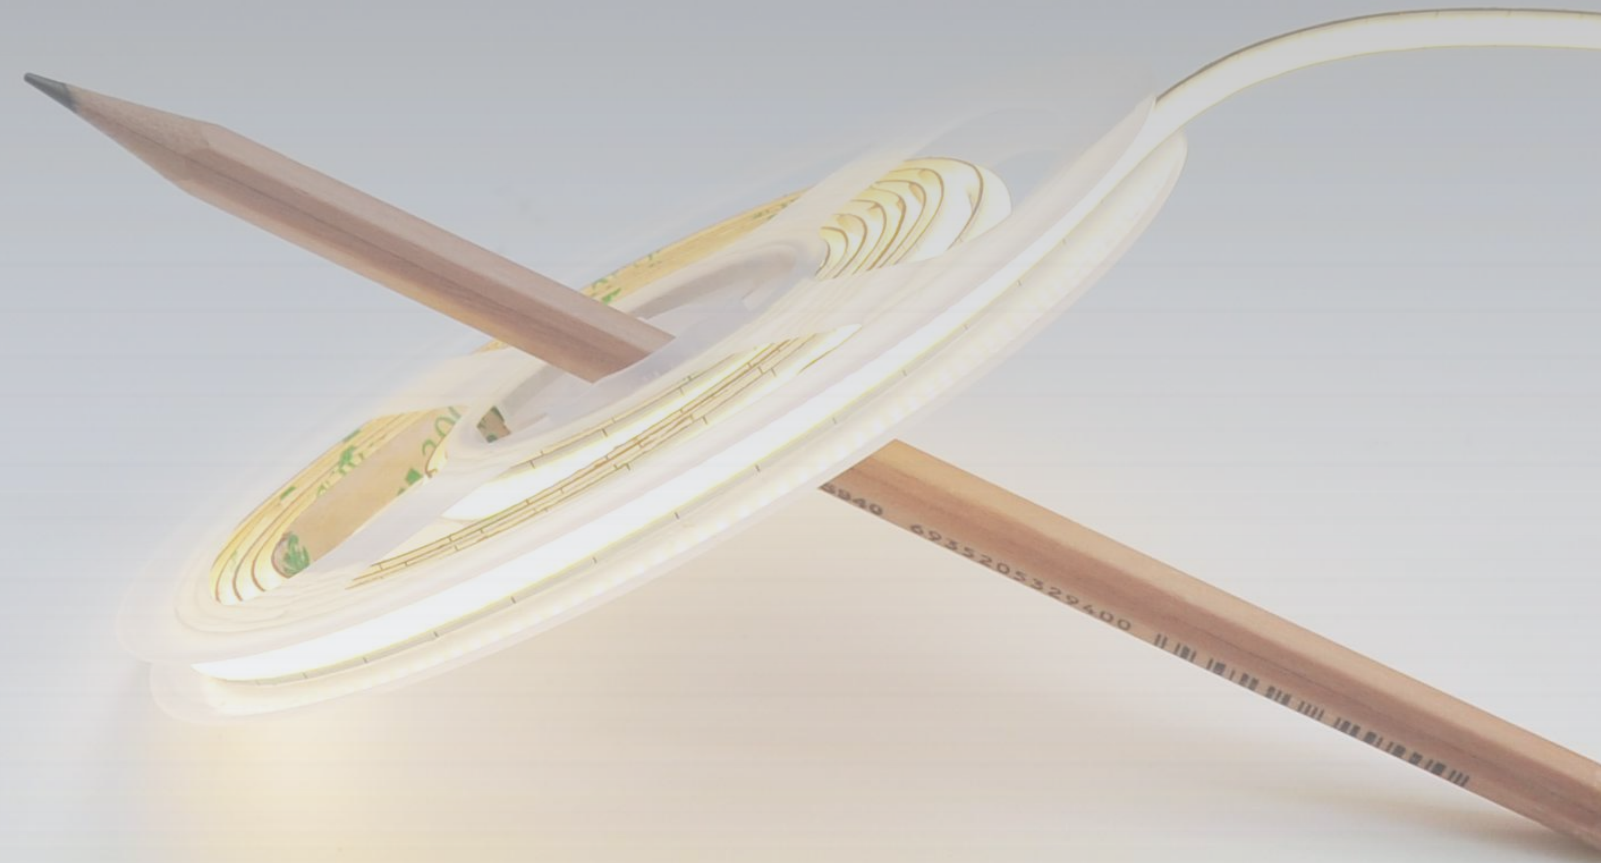


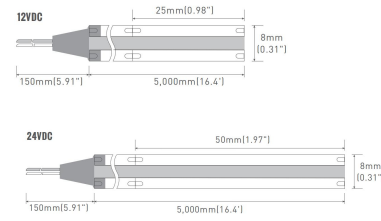



Product Code	Voltage	Color	Watts	LEDs/Meter	Lumen	Efficiency	Pitch	CRI	Width
AL-SLCOB90-RR320V108	12VDC	3000K 4000K 6500K	8W	320	800	100	25mm	90	8mm
AL-SLCOB90-RR320V208	24VDC	3000K 4000K 6500K	8W	320	800	100	50mm	90	8mm

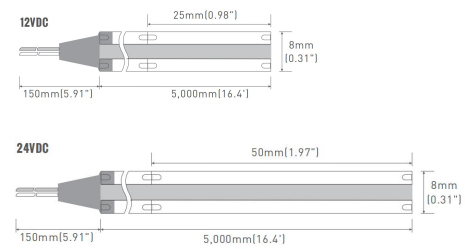



Product Code	Voltage	Color	Watts	LEDs/Meter	Lumen	Efficiency	Pitch	CRI	Width
AL-SLCOB90-RR480V108	12VDC	3000K 4000K 6500K	10W	480	1000	100	25mm	90	8mm
AL-SLCOB90-RR480V208	24VDC	3000K 4000K 6500K	10W	480	1000	100	50mm	90	8mm

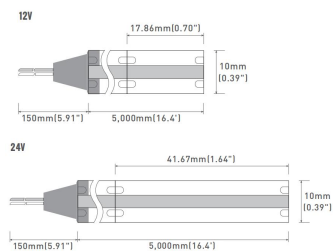



Product Code	Voltage	Color	Watts	LEDs/Meter	Lumen	Efficiency	Pitch	CRI	Width
AL-SLCOBXX-ST504V110	12VDC	2200K 2700K 3000K 4000K 5000K 6500K	12W	504	960	80	50mm	80 90	10mm
AL-SLCOBXX-ST504V210	24VDC	2200K 2700K 3000K 4000K 5000K 6500K	12W	504	960	80	100mm	80 90	10mm

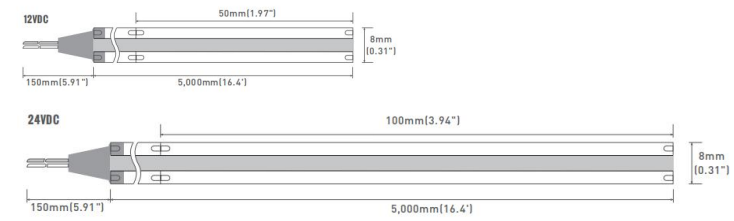



Product Code	Voltage	Color	Watts	LEDs/Meter	Lumen	Efficiency	Pitch	CRI	Width
AL-SLCOBXX-PR320V108	12VDC	2200K 2700K 3000K 4000K 5000K 6500K	8W	320	880	110	50mm	80 90	8mm
AL-SLCOBXX-PR320V208	24VDC	2200K 2700K 3000K 4000K 5000K 6500K	8W	320	880	110	100mm	80 90	8mm

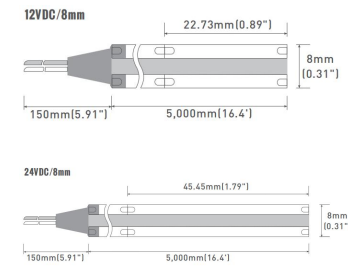



Product Code	Voltage	Color	Watts	LEDs/Meter	Lumen	Efficiency	Pitch	CRI	Width
AL-SLCOBXX-PR528V108	12VDC	2200K 2700K 3000K 4000K 5000K 6500K	10W	528	1100	110	22.73mm	80 90	8mm
AL-SLCOBXX-PR528V208	24VDC	2200K 2700K 3000K 4000K 5000K 6500K	10W	528	1100	110	45.45mm	80 90	8mm

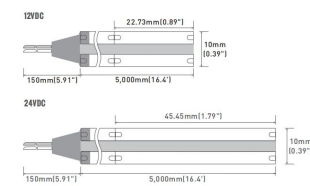


Product Code	Voltage	Color	Watts	LEDs/Meter	Lumen	Efficiency	Pitch	CRI	Width
AL-SLCOBXX-PR528V110	12VDC	2200K 2700K 3000K 4000K 5000K 6500K	15W	528	1100	110	22.73mm	80 90	10mm
AL-SLCOBXX-PR528V210	24VDC	2200K 2700K 3000K 4000K 5000K 6500K	15W	528	1100	110	45.45mm	80 90	10mm

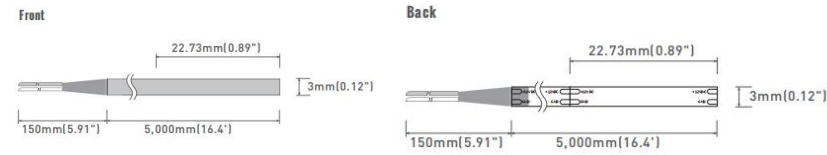



Product Code	Voltage	Color	Watts	LEDs/Meter	Lumen	Efficiency	Pitch	CRI	Width
AL-SLCOB90-UN528V103	12VDC	2200K 2700K 3000K 4000K 5000K 6500K	4W	528	440	110	22.73mm	80	4.5mm
AL-SLCOB90-UN528V103	12VDC	2200K 2700K 3000K 4000K 5000K 6500K	4W	528	440	100	22.73mm	90	4.5mm

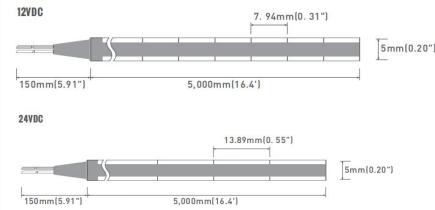



Product Code	Voltage	Color	Watts	LEDs/Meter	Lumen	Efficiency	Pitch	CRI	Width
AL-SLCOBXX-UN504V105	12VDC	2200K 2700K 3000K 4000K 5000K 6500K	6W	504	660	110	7.94mm	80 90	5mm
AL-SLCOBXX-UN528V205	24VDC	2200K 2700K 3000K 4000K 5000K 6500K	6W	504	660	100	13.89mm	80 90	5mm

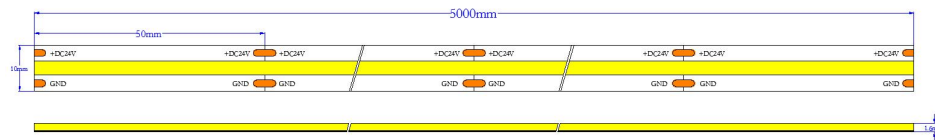



Product Code	Voltage	Color	Watts	LEDs/Meter	Lumen	Efficiency	Pitch	CRI	Width
AL-SLCOB80-UL360V210	24VDC	2700K 3000K 4000K 6500K	7W	360	700	100	50mm	80	10mm
AL-SLCOB90-UL360V210	24VDC	2700K 3000K 4000K 6500K	7W	360	630	90	100mm	90	10mm

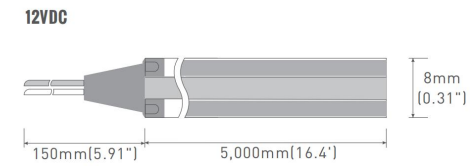



Product Code	Voltage	Color	Watts	LEDs/Meter	Lumen	Efficiency	Free Cut	CRI	Width
AL-SLCOB80-FC528V108	12VDC	2200K 2700K 3000K 4000K 5000K 6500K	10W	528	980	98	Yes	80	8mm
AL-SLCOB90-FC528V108	12VDC	2200K 2700K 3000K 4000K 5000K 6500K	10W	528	850	85	Yes	90	8mm

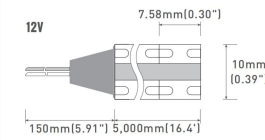



Product Code	Voltage	Color	Watts	LEDs/Meter	Lumen	Efficiency	Pitch	CRI	Width
AL-SLCOB80-MC528V110	12VDC	2200K 2700K 3000K 4000K 5000K 6500K	10W	528	1100	110	7.58mm	80	10mm
AL-SLCOB90-MC528V110	12VDC	2200K 2700K 3000K 4000K 5000K 6500K	10W	528	1000	100	7.58mm	90	10mm

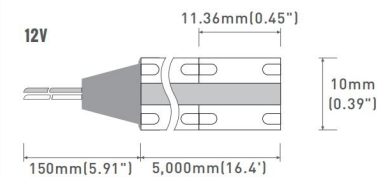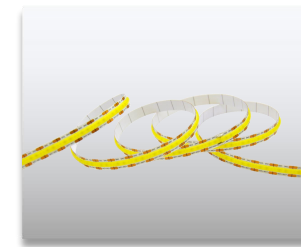



Product Code	Voltage	Color	Watts	LEDs/Meter	Lumen	Efficiency	Pitch	CRI	Width
AL-SLCOB80-SC528V210	24VDC	2200K 2700K 3000K 4000K 5000K 6500K	10W	528	840	84	11.36mm	80	10mm
AL-SLCOB90-SC528V210	24VDC	2200K 2700K 3000K 4000K 5000K 6500K	10W	528	760	76	11.36mm	90	10mm

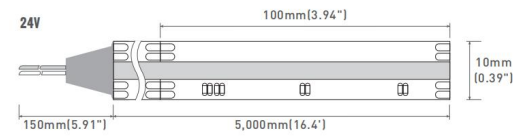



Product Code	Voltage	Color	Watts	LEDs/Meter	Lumen	Efficiency	Pitch	CRI	Width
AL-SLCOB-ST630V208-RGB	24VDC	RGB	9W	630	405	45	100mm	-	8mm

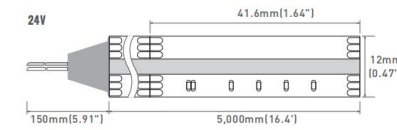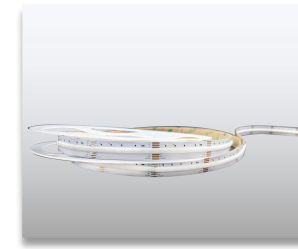



Product Code	Voltage	Color	Watts	LEDs/Meter	Lumen	Efficiency	Pitch	CRI	Width
AL-SLCOB80-ST840V212	24VDC	RGB+CCT	16W	840	720	45	41.6mm	-	12mm

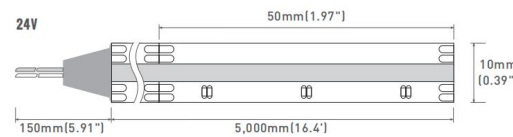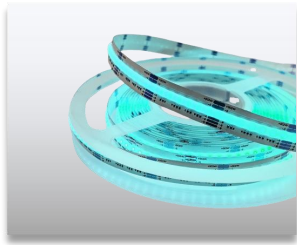



Product Code	Voltage	Color	Watts	LEDs/Meter	Lumen	Efficiency	Pitch	CRI	Width
AL-SLCOB-ST840V210-RGB	12VDC	RGB	9W	840	525	35	50mm	-	10mm

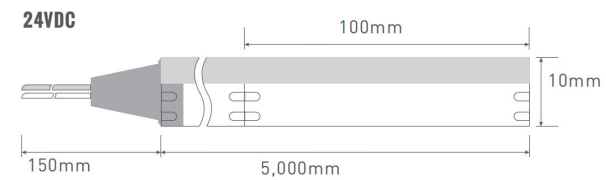

Product Code	Voltage	Color	Watts	LEDs/Meter	Lumen	Efficiency	Pitch	CRI	Width
AL-SLCOB80-SE630V210-RGB	24VDC	RGB	9W	630	180	20	100mm	80	10mm

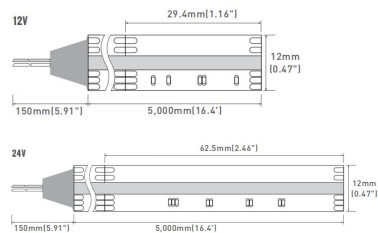



Product Code	Voltage	Color	Watts	LEDs/Meter	Lumen	Efficiency	Pitch	CRI	Width
AL-SLCOB-ST816V112	12VDC	RGBW	16W	816	800	70	29.4mm	-	12mm
AL-SLCOB-ST816V212	24VDC	RGBW	16W	816	800	75	62.5mm	-	12mm

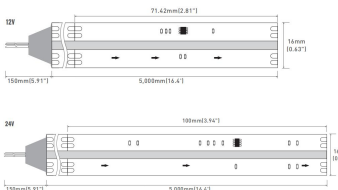



Product Code	Voltage	Color	Watts	LEDs/Meter	Lumen	Efficiency	Pitch	CRI	Width
AL-SLCOB-ST630V116-RGB-DMX	12VDC	RGB	10W	528	200	20	71.42mm	80	10mm
AL-SLCOB-ST630V216-RGB-DMX	24VDC	RGB	14W	528	280	20	100mm	90	10mm


# COB Strip Light

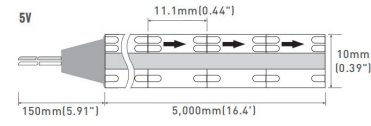

Product Code	Voltage	Color	Watts	LEDs/Meter	Lumen	Efficiency	Pitch	CRI	Width
AL-SLCOB-SP1180V510-RGB	5VDC	RGB	14W	180	280	20	11.1mm	-	10mm

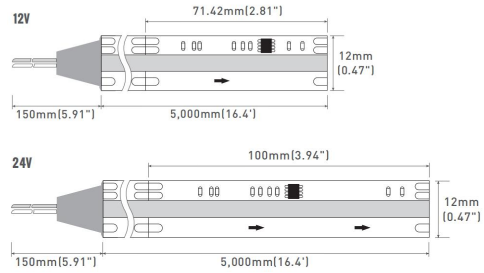


Product Code	Voltage	Color	Watts	LEDs/Meter	Lumen	Efficiency	Pitch	CRI	Width
AL-SLCOB-ST630V112-RGB	12VDC	RGB	9W	840	360	40	71.42mm	-	12mm
AL-SLCOB-ST630V212-RGB	24VDC	RGB	13W	840	585	45	100mm	-	12mm

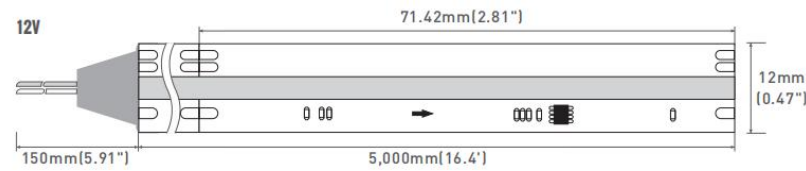


Product Code	Voltage	Color	Watts	LEDs/Meter	Lumen	Efficiency	Pitch	CRI	Width
AL-SLCOB-ST840V112-RGBW	12VDC	RGBW	7W	840	350	50	71.42mm	-	12mm



# COB Neon Strip Light




Product Code	Voltage	Color	Watts	LEDs/Meter	Lumen	Efficiency	Pitch	CRI	Dimension
AL-NLCOB90-A480V2-0410	24VDC	2700K 3000K 4000K 6500K	10W	480	700	70	50mm	90	4x10mm

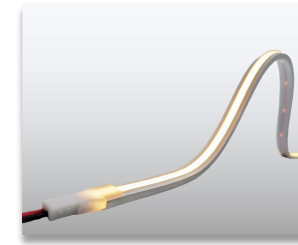

Product Code	Voltage	Color	Watts	LEDs/Meter	Lumen	Efficiency	Pitch	CRI	Dimension
AL-NLCOB90-B480V2-0410	24VDC	2700K 3000K 4000K 6500K	10W	480	700	70	50mm	90	4x10mm

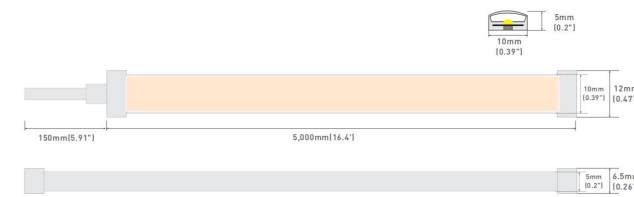

Product Code	Voltage	Color	Watts	LEDs/Meter	Lumen	Efficiency	Pitch	CRI	Dimension
AL-NLCOB90-C480V2-0510	24VDC	2700K 3000K 4000K 6500K	10W	480	850	85	50mm	90	5x10mm



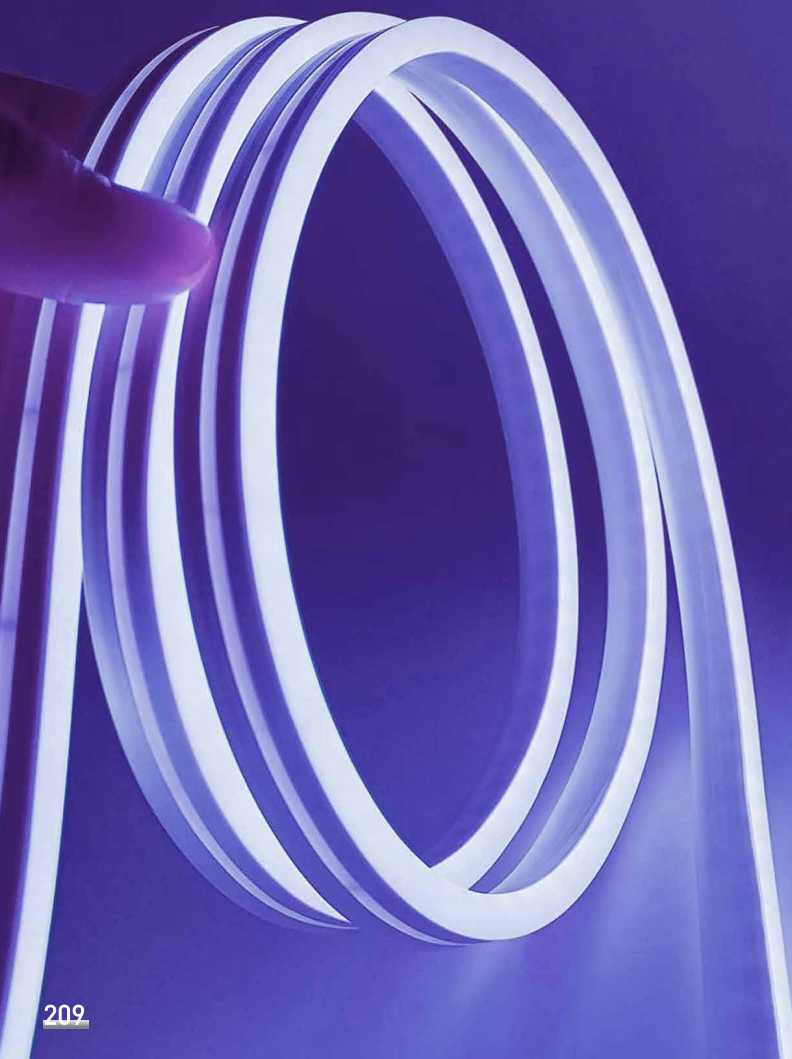


### Product Description

- IP67 for outdoor lighting applications.
- Pure silicone material, anti-UV and yellowing.
- Super flexible, the neon light can be made many shapes.
- Various colors optional: WW, NW, CW, red, green, blue, lemon yellow, golden yellow, ice blue, purple, pink, orange, Maldives green, RGB, RGBW, digital.
- Mini length cuttable.








# Dome Shape Neon Flex Light

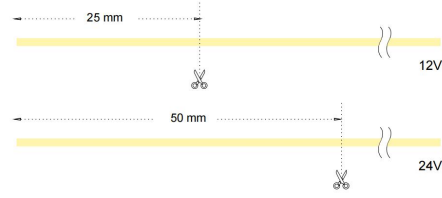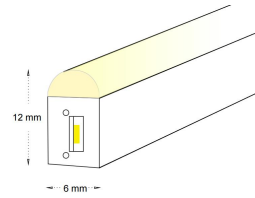



Product Code	Color	Power	LED	LED Qty	IP	Voltage	Beam Angle	Dimension	Material	Length
AL-SLN2835T120WW-W6	Warm White									
AL-SLN2835T120NW-W6	Natrual White									
AL-SLN2835T120CW-W6	Cold White									
AL-SLN2835T120RD-W6	Red									
AL-SLN2835T120GR-W6	Green									
AL-SLN2835T120BL-W6	Blue									
AL-SLN2835T120IB-W6	Ice Blue	9W/M	SMD2835	120leds/m	67	12/24VDC	120°	6x12mm	Silicone	50m/reel
AL-SLN2835T120LY-W6	Lemon Yellow									
AL-SLN2835T120GY-W6	Golden Yellow									
AL-SLN2835T120LP-W6	Light Pink									
AL-SLN2835T120PK-W6	Pink									
AL-SLN2835T120PP-W6	Purple									
AL-SLN2835T120MG-W6	Maldives Green									
AL-SLN2835T120OR-W6	Orange									




# Flat Shape Neon Flex Light

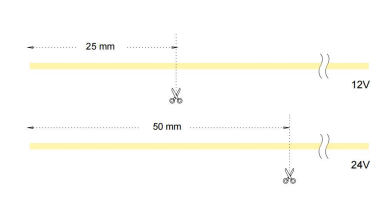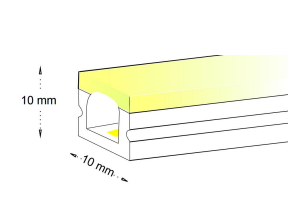





Product Code	Color	Power	LED	LED Qty	IP	Voltage	Beam Angle	Dimension	Material	Length
AL-SLN2835T120WW-F10	Warm White									
AL-SLN2835T120NW-F10	Natrual White									
AL-SLN2835T120CW-F10	Cold White									
AL-SLN2835T120RD-F10	Red									
AL-SLN2835T120GR-F10	Green									
AL-SLN2835T120BL-F10	Blue									
AL-SLN2835T120IB-F10	Ice Blue	9W/M	SMD2835	120leds/m	67	12/24VDC	120°	10x10mm	Silicon	50m/reel
AL-SLN2835T120LY-F10	Lemon Yellow									
AL-SLN2835T120GY-F10	Golden Yellow									
AL-SLN2835T120LP-F10	Light Pink									
AL-SLN2835T120PK-F10	Pink									
AL-SLN2835T120PP-F10	Purple									
AL-SLN2835T120MG-F10	Maldives Green									
AL-SLN2835T120OR-F10	Orange									

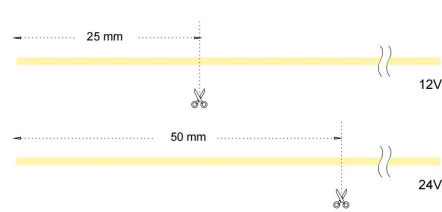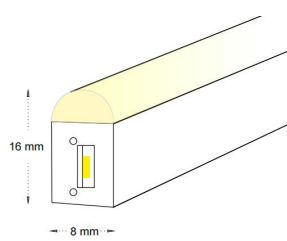





Product Code	Color	Power	LED	LED Qty	IP	Voltage	Beam Angle	Dimension	Material	Length
AL-SLN2835T120WW-W8	Warm White									
AL-SLN2835T120NW-W8	Natrual White									
AL-SLN2835T120CW-W8	Cold White									
AL-SLN2835T120RD-W8	Red									
AL-SLN2835T120GR-W8	Green									
AL-SLN2835T120BL-W8	Blue									
AL-SLN2835T120IB-W8	Ice Blue	9W/M	SMD2835	120leds/m	67	12/24VDC	120°	8x16mm	Silicone	50m/reel
AL-SLN2835T120LY-W8	Lemon Yellow									
AL-SLN2835T120GY-W8	Golden Yellow									
AL-SLN2835T120LP-W8	Light Pink									
AL-SLN2835T120PK-W8	Pink									
AL-SLN2835T120PP-W8	Purple									
AL-SLN2835T120MG-W8	Maldives Green									
AL-SLN2835T120OR-W8	Orange									

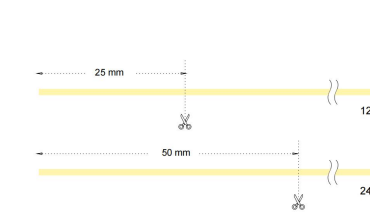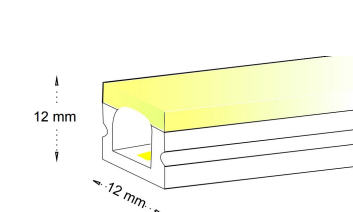


Product Code	Color	Power	LED	LED Qty	IP	Voltage	Beam Angle	Dimension	Material	Length
AL-SLN2835T120WW-F12	Warm White									
AL-SLN2835T120NW-F12	Natrual White									
AL-SLN2835T120CW-F12	Cold White									
AL-SLN2835T120RD-F12	Red									
AL-SLN2835T120GR-F10	Green									
AL-SLN2835T120BL-F12	Blue									
AL-SLN2835T120IB-F12	Ice Blue	9W/M	SMD2835	120leds/m	67	12/24VDC	120°	12x12mm	Silicone	50m/reel
AL-SLN2835T120LY-F12	Lemon Yellow									
AL-SLN2835T120GY-F12	Golden Yellow									
AL-SLN2835T120LP-F12	Light Pink									
AL-SLN2835T120PK-F12	Pink									
AL-SLN2835T120PP-F12	Purple									
AL-SLN2835T120MG-F12	Maldives Green									
AL-SLN2835T120OR-F12	Orange									

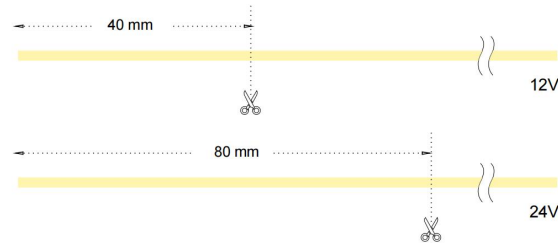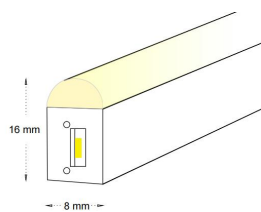



Product Code	Color	Power	LED	LED Qty	IP	Voltage	Beam Angle	Dimension	Material	Length
AL-SLN5050T78RGB-W8	RGB	12W/M	SMD5050	12V: 78leds/m 24V: 72leds/m	67	12/24VDC	120°	8x16mm	Silicone	50m/reel

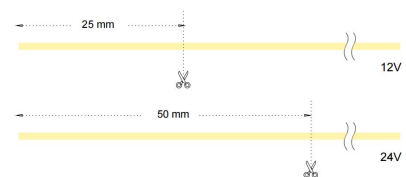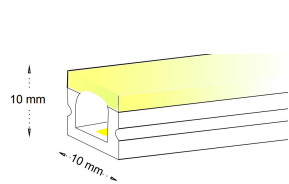





Product Code	Color	Power	LED	LED Qty	IP	Voltage	Beam Angle	Dimension	Material	Length
AL-SLN2835T120-TS10D-24RGB	RGB	12W/M	SMD4040	120leds/m	67	12/24VDC	120°	10x10mm	Silicone	50m/reel

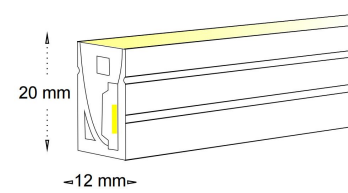

Product Code	Color	Power	LED	LED Qty	IP	Voltage	Beam Angle	Dimension	Material	Length
AL-SLN5050T60-W12E-DMX	RGBW DMX512	14.4W/M	SMD5050	60leds/m	67	24VDC	120°	12x20mm	Silicone	5m/reel




Product Code	Color	Power	LED	LED Qty	IP	Voltage	Beam Angle	Dimension	Material	Length
AL-SLN2835T168WW-F0408	Warm White	6W/M	SMD2835	168leds/m	67	12/24VDC	120°	4x8mm	Silicon	50m/reel
AL-SLN2835T168NW-F0408	Natrual White									
AL-SLN2835T168CW-F0408	Cold White									
AL-SLN2835T168RD-F0408	Red									
AL-SLN2835T168GR-F0408	Green									
AL-SLN2835T168BL-F0408	Blue									
AL-SLN2835T168IB-F0408	Ice Blue									
AL-SLN2835T168LY-F0408	Lemon Yellow									
AL-SLN2835T168GY-F0408	Golden Yellow									
AL-SLN2835T168LP-F0408	Light Pink									
AL-SLN2835T168PK-F0408	Pink									
AL-SLN2835T168PP-F0408	Purple									
AL-SLN2835T168MG-F0408	Maldives Green									
AL-SLN2835T168OR-F0408	Orange									

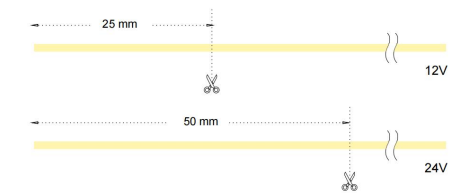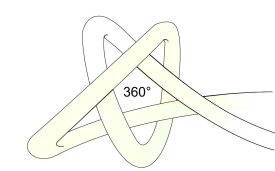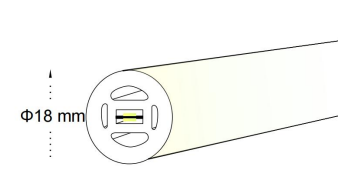



Product Code	Color	Power	LED	LED Qty	IP	Voltage	Beam Angle	Diameter	Material	Length
AL-SLN2835T168WW-D18	Warm White	14W/M	SMD2835	240leds/m	67	12/24VDC	360°	18mm	Silicone	5m/reel
AL-SLN2835T168NW-D18	Natrual White									
AL-SLN2835T168CW-D18	Cold White									
AL-SLN2835T168RD-D18	Red									
AL-SLN2835T168GR-D18	Green									
AL-SLN2835T168BL-D18	Blue									
AL-SLN2835T168IB-D18	Ice Blue									
AL-SLN2835T168LY-D18	Lemon Yellow									
AL-SLN2835T168GY-D18	Golden Yellow									
AL-SLN2835T168LP-D18	Light Pink									
AL-SLN2835T168PK-D18	Pink									
AL-SLN2835T168PP-D18	Purple									
AL-SLN2835T168MG-D18	Maldives Green									
AL-SLN2835T168OR-D18	Orange									

**Product Description**



- Indoor COB LED downlight.
- COB LED light source, high lumen output.
- Adjustable or fixed for choosing to meet differnt lighting requirements.
- Various beam angles are optional: narrow, medium or wide beam.
- Optical accessories: honeycomb, reflector and lens.
- The finish color can be customized.

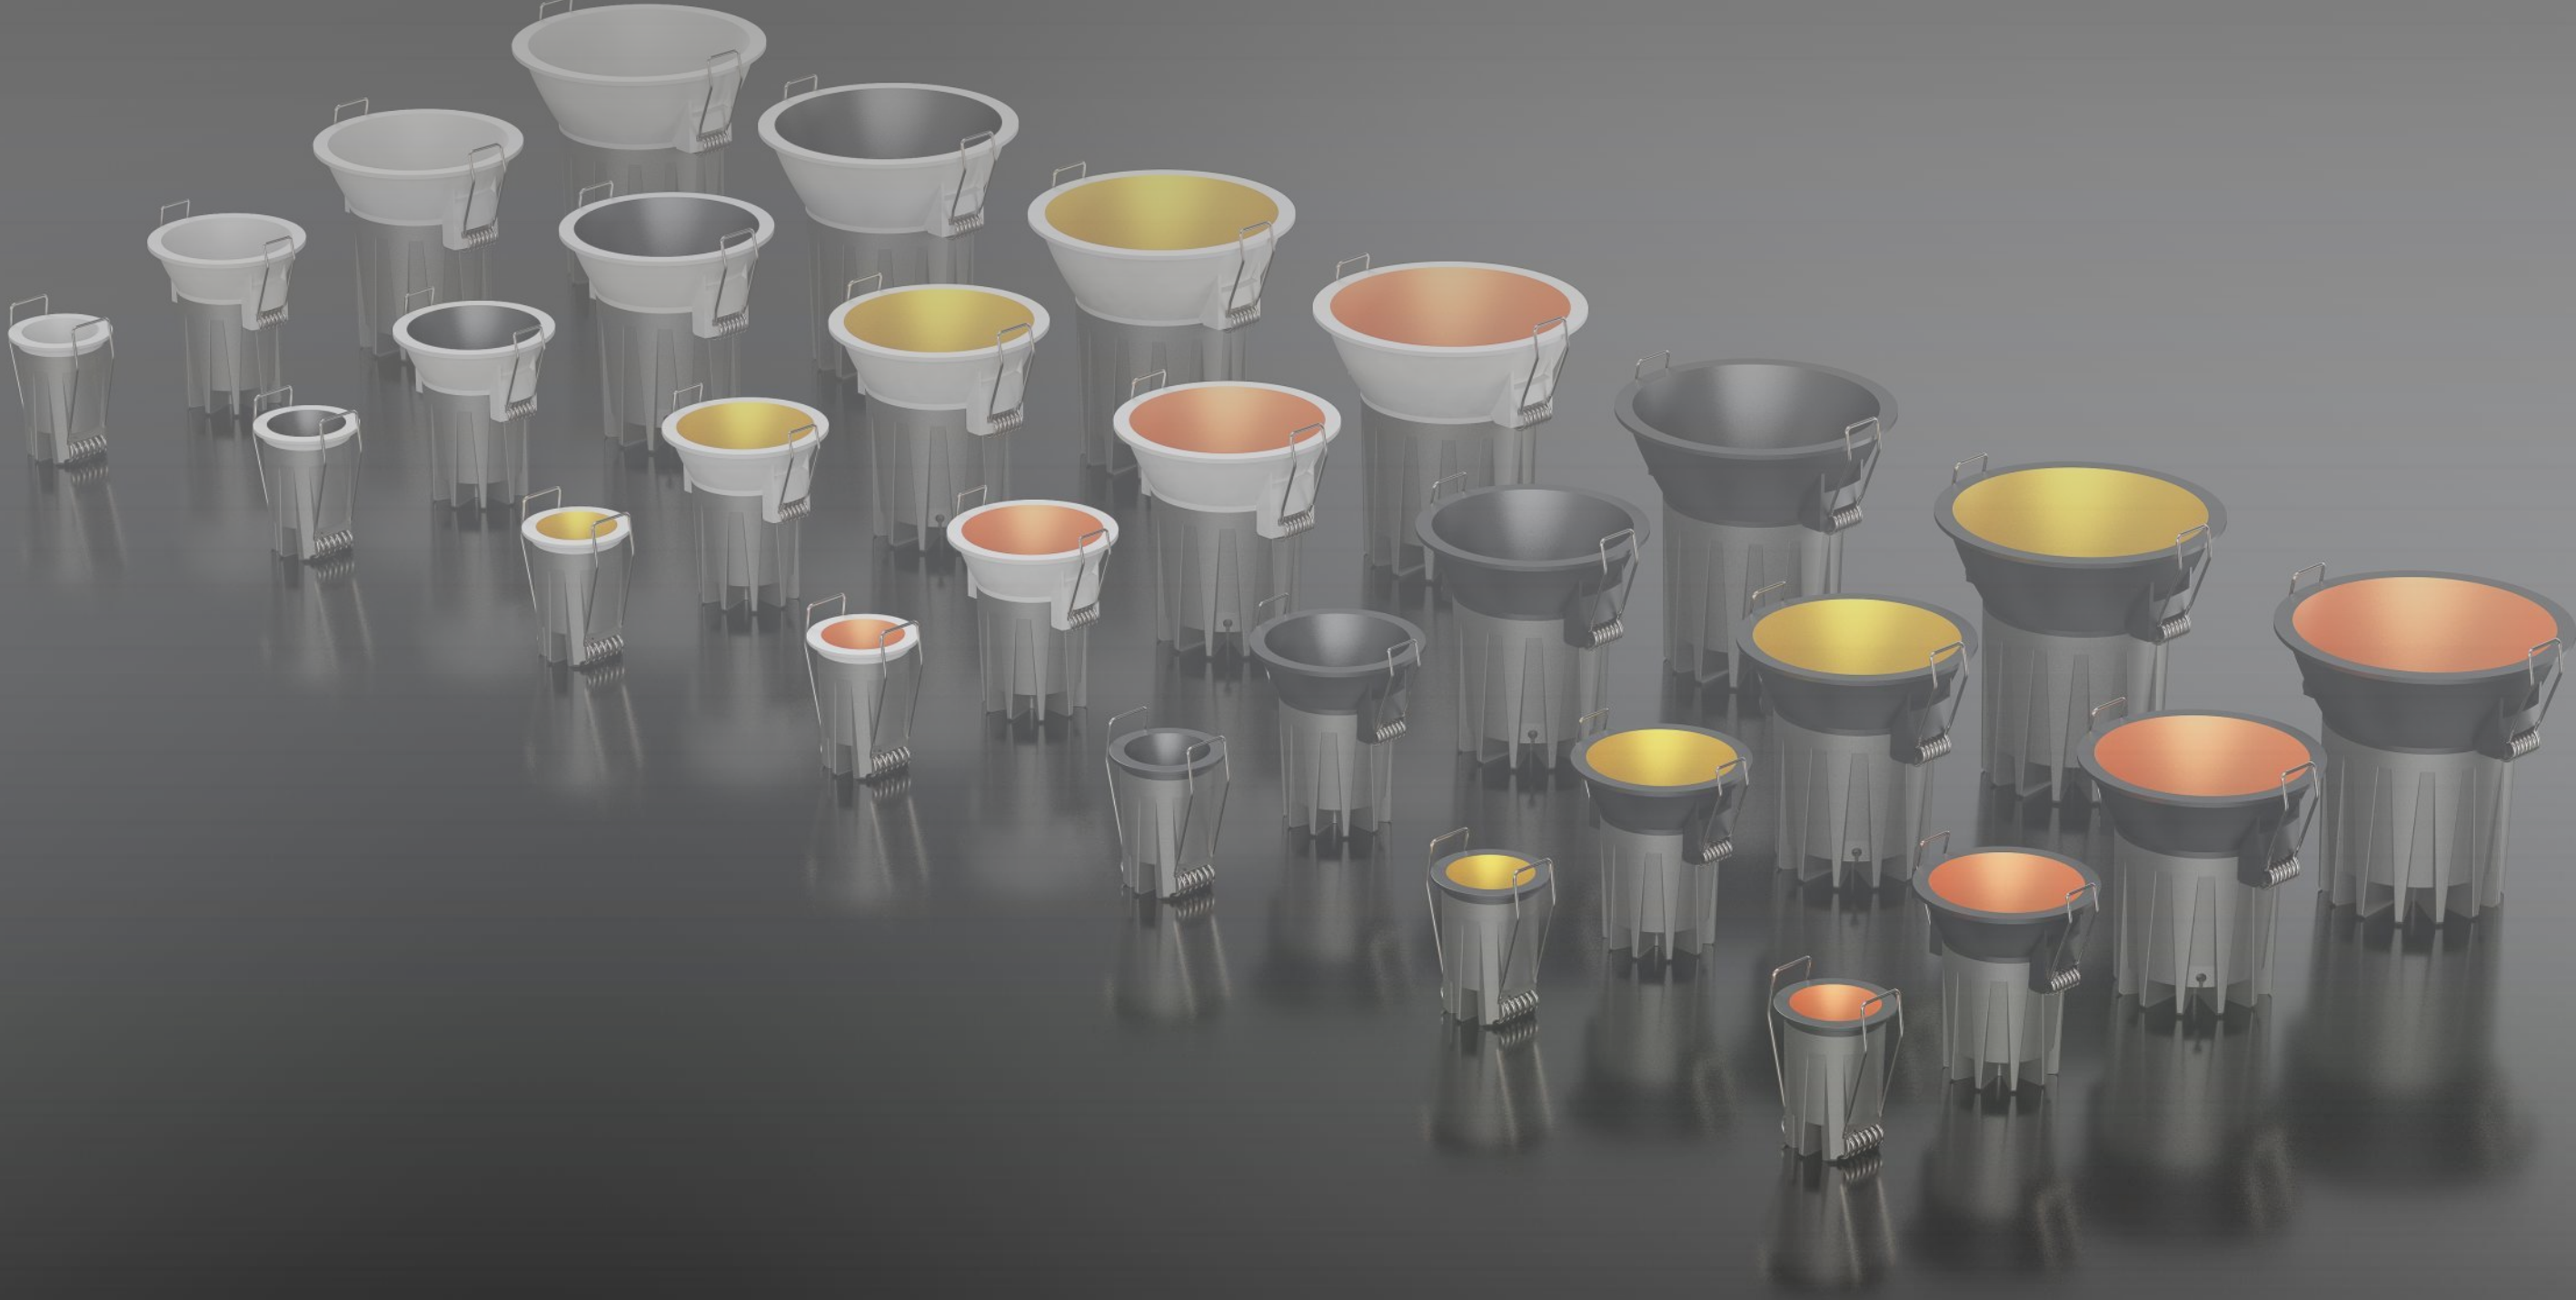





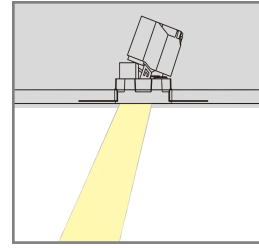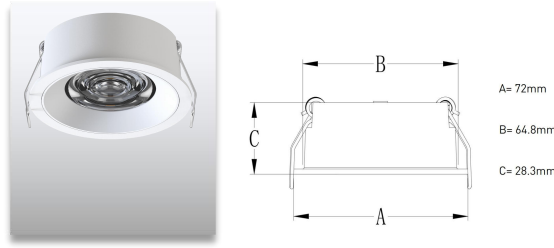



Product Code	Power	Voltage	Color Temperature	Beam Angle	UGR	Flux	CRI	IP
AL-SP69B-FR650-9W	9W	200-240VAC	2700K 3000K 3500K 4000K 5000K	18°/24°/38°/60°	<20	626lm	90+	20

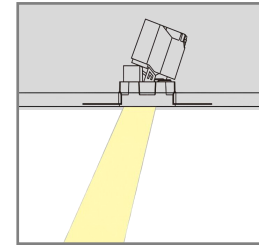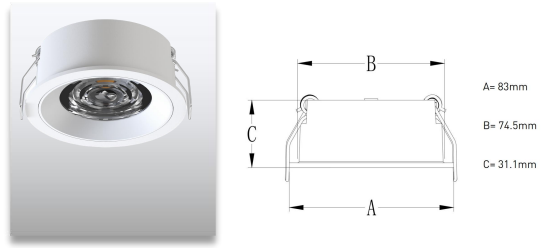



Product Code	Power	Voltage	Color Temperature	Beam Angle	UGR	Flux	CRI	IP
AL-SP69B-FR750-12W	12W	200-240VAC	2700K 3000K 3500K 4000K 5000K	24°/36°	<20	1060lm	90+	20

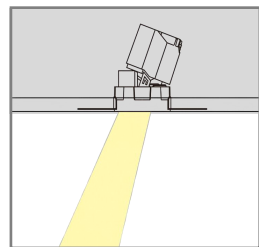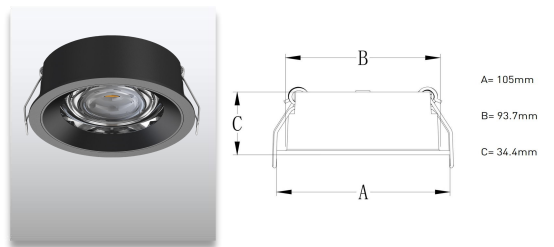



Product Code	Power	Voltage	Color Temperature	Beam Angle	UGR	Flux	CRI	IP
AL-SP69B-FR950-15W	15W	200-240VAC	2700K 3000K 3500K 4000K 5000K	18°/24°/38°/60°	<20	1296lm	90+	20

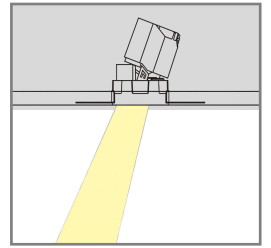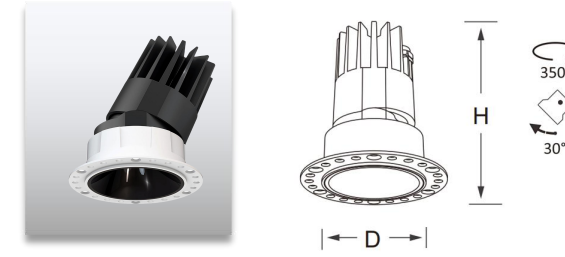



Product Code	Voltage	Color Temperature	Beam Angle	UGR	Flux	CRI	D(mm)	H(mm)	Cut-out(mm)
AL-SP133A-FR550-8W	200-240VAC	2700K-6500K	15°/24°/38°/60°	<20	560lm	90+	52.9	85	∅ 55
AL-SP133A-FR750-18W	200-240VAC	2700K-6500K	15°/24°/38°/60°	<20	1260lm	90+	72.4	110	∅ 77
AL-SP133A-FR950-25W	200-240VAC	2700K-6500K	15°/24°/38°/60°	<20	1750lm	90+	91.5	130	∅ 97

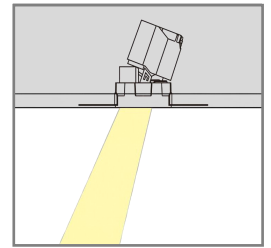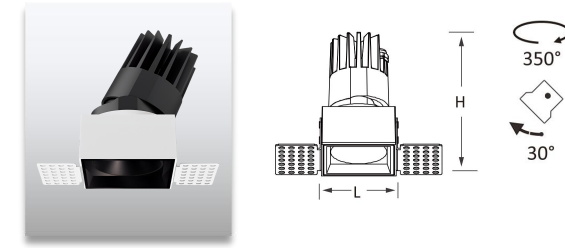



Product Code	Voltage	Color Temperature	Beam Angle	UGR	Flux	CRI	L(mm)	H(mm)	Cut-out(mm)
AL-SP133A-FS550-8W	200-240VAC	2700K-6500K	15°/24°/38°/60°	<20	560lm	90+	54x54	93mm	57.5x57.5
AL-SP133A-FS750-18W	200-240VAC	2700K-6500K	15°/24°/38°/60°	<20	1260lm	90+	74x74	121	77x77
AL-SP133A-FS950-25W	200-240VAC	2700K-6500K	15°/24°/38°/60°	<20	1750lm	90+	94x94	146	97x97

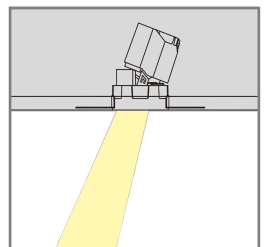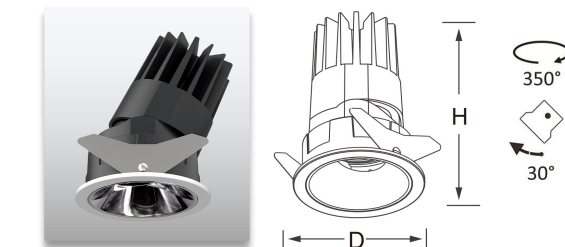



Product Code	Voltage	Color Temperature	Beam Angle	UGR	Flux	CRI	D(mm)	H(mm)	Cut-out(mm)
AL-SP135A-FR550-8W	200-240VAC	2700K-6500K	15°/24°/38°/60°	<20	560lm	90+	62	93	∅ 55
AL-SP135A-FR750-18W	200-240VAC	2700K-6500K	15°/24°/38°/60°	<20	1260lm	90+	84	110	∅ 77
AL-SP135A-FR950-25W	200-240VAC	2700K-6500K	15°/24°/38°/60°	<20	1750lm	90+	111	130	∅ 95

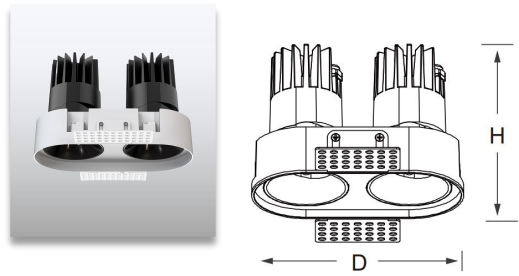



Product Code	Voltage	Color Temperature	Beam Angle	UGR	Flux	CRI	LxH(mm)	H(mm)	Cut-out(mm)
AL-SP133A-FR550-2x8W	200-240VAC	2700K-6500K	15°/24°/38°/60°	<20	1120lm	90+	126x65	85	128x67
AL-SP133A-FR750-2x18W	200-240VAC	2700K-6500K	15°/24°/38°/60°	<20	2520lm	90+	177x87	110	180x90
AL-SP133A-FR950-2x25W	200-240VAC	2700K-6500K	15°/24°/38°/60°	<20	3500lm	90+	222x108	130	225x110

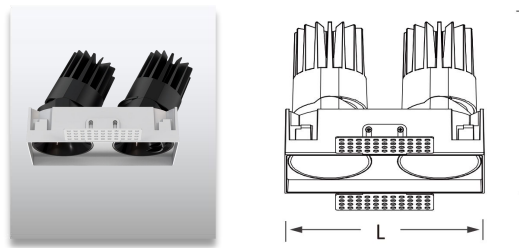



Product Code	Voltage	Color Temperature	Beam Angle	UGR	Flux	CRI	LxH(mm)	H(mm)	Cut-out(mm)
AL-SP133A-FS550-2x8W	200-240VAC	2700K-6500K	15°/24°/38°/60°	<20	1120lm	90+	108x54	93	111x56
AL-SP133A-FS750-2x18W	200-240VAC	2700K-6500K	15°/24°/38°/60°	<20	2520lm	90+	147x74	121	150x77
AL-SP133A-FS950-2x25W	200-240VAC	2700K-6500K	15°/24°/38°/60°	<20	3500lm	90+	187x94	146	190x97

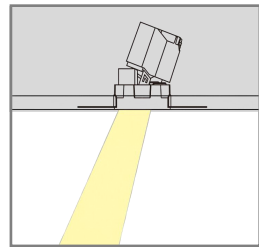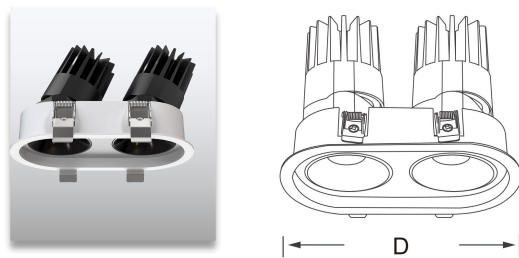

Product Code	Voltage	Color Temperature	Beam Angle	UGR	Flux	CRI	LxH(mm)	H(mm)	Cut-out(mm)
AL-SP135A-FR550-2x8W	200-240VAC	2700K-6500K	15°/24°/38°/60°	<20	1120lm	90+	139x79	90	128x65
AL-SP135A-FR750-2x18W	200-240VAC	2700K-6500K	15°/24°/38°/60°	<20	2520lm	90+	194x104	121	180x95
AL-SP135A-FR950-2x25W	200-240VAC	2700K-6500K	15°/24°/38°/60°	<20	3500lm	90+	239x125	142	225x110

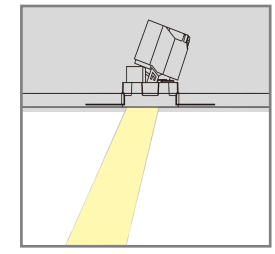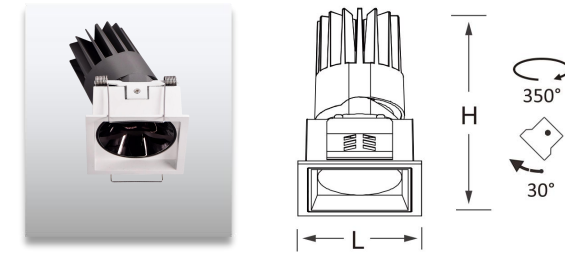

Product Code	Voltage	Color Temperature	Beam Angle	UGR	Flux	CRI	L(mm)	H(mm)	Cut-out(mm)
AL-SP135A-FS550-8W	200-240VAC	2700K-6500K	15°/24°/38°/60°	<20	560lm	90+	64x64	93	55x55
AL-SP135A-FS750-18W	200-240VAC	2700K-6500K	15°/24°/38°/60°	<20	1260lm	90+	85x85	120	75x75
AL-SP135A-FS950-25W	200-240VAC	2700K-6500K	15°/24°/38°/60°	<20	1750lm	90+	105x105	146	95x95

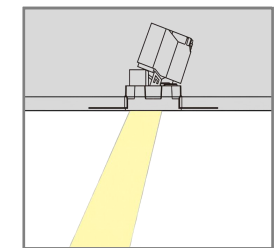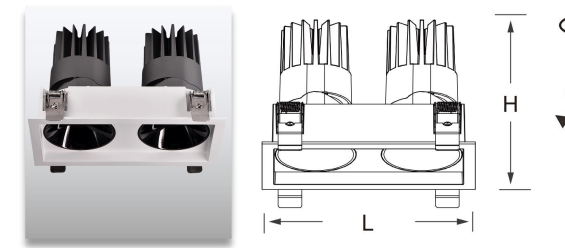


Product Code	Voltage	Color Temperature	Beam Angle	UGR	Flux	CRI	LxH(mm)	H(mm)	Cut-out(mm)
AL-SP135A-FS550-2x8W	200-240VAC	2700K-6500K	15°/24°/38°/60°	<20	1120lm	90+	130x69	90	111x55
AL-SP135A-FS750-2x18W	200-240VAC	2700K-6500K	15°/24°/38°/60°	<20	2520lm	90+	180x91	120	165x80
AL-SP135A-FS950-2x25W	200-240VAC	2700K-6500K	15°/24°/38°/60°	<20	3500lm	90+	224x100	142	210x100





**Product Description**


- High lumen output, AL-MHB01 series of LED high bay light comes out with high lumen 150lm/W.
- Wide voltage ranges from AC85V to 300V or AC180V to 528V, this high bay light can be perfect used in warehouse or workshop lighting application.
- Various beam angles optional: 60°/ 90°/120°.
- UGR<19, AL-MHB01 series of LED high bay light is friendly to eyes that protect the workers from lighting pollution.

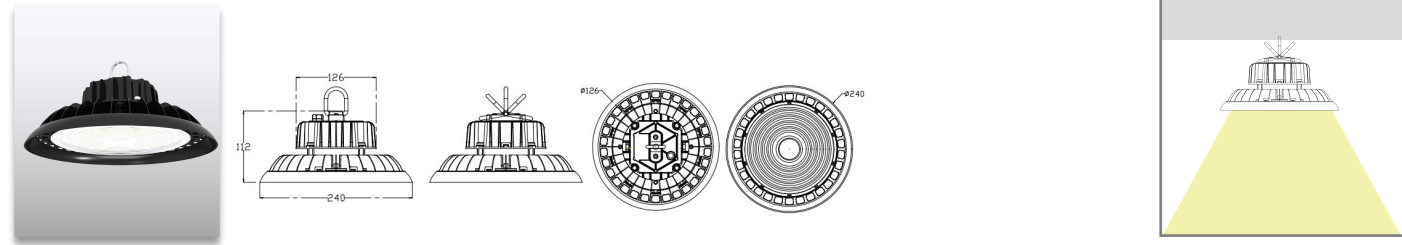


Product Code	Power	Voltage	Color Temperature	Beam Angle	Lumen	Efficiency	IK	IP
AL-MHB01-P60	60W	AC85-300V AC180-528V	2700K-6500K	60°/90°/120°	>9000lm	150lm/W	08	66

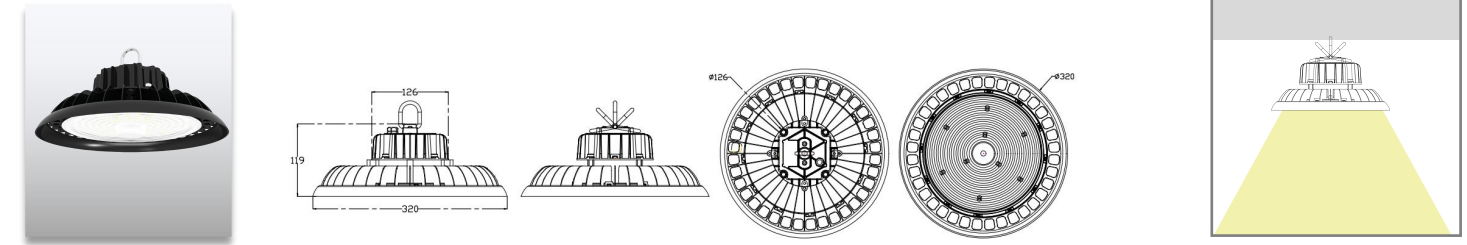


Product Code	Power	Voltage	Color Temperature	Beam Angle	Lumen	Efficiency	IK	IP
AL-MHB01-P200	200W	AC85-300V AC180-528V	2700K-6500K	60°/90°/120°	>30000lm	150lm/W	08	66

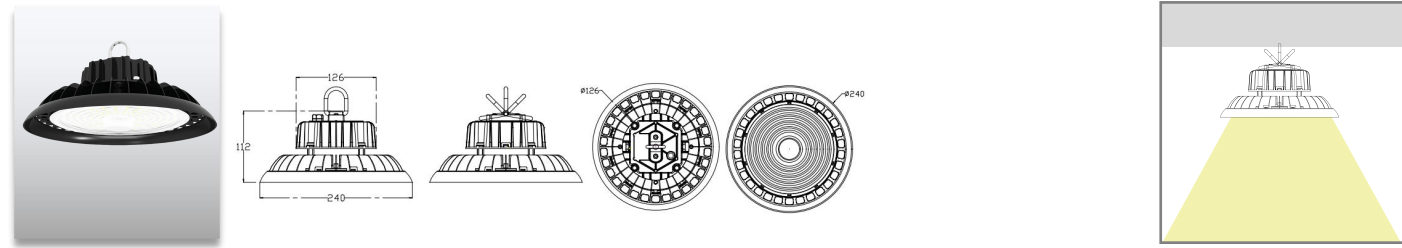

Product Code	Power	Voltage	Color Temperature	Beam Angle	Lumen	Efficiency	IK	IP
AL-MHB01-P100	100W	AC85-300V AC180-528V	2700K-6500K	60°/90°/120°	>15000lm	150lm/W	08	66


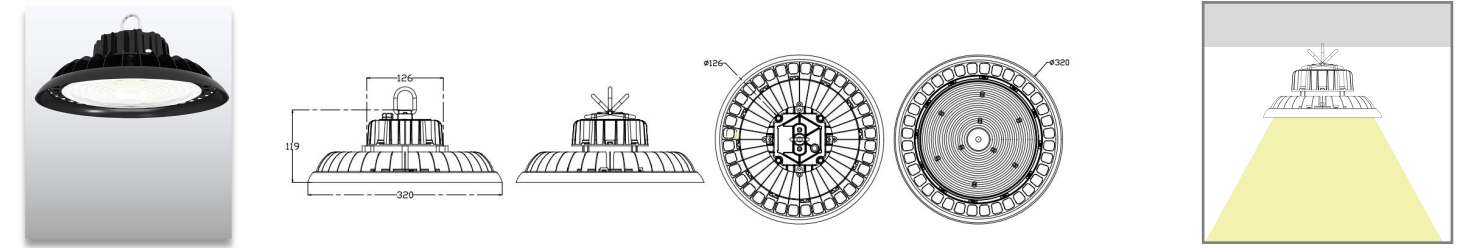


Product Code	Power	Voltage	Color Temperature	Beam Angle	Lumen	Efficiency	IK	IP
AL-MHB01-P240	240W	AC85-300V AC180-528V	2700K-6500K	60°/90°/120°	>36000lm	150lm/W	08	66

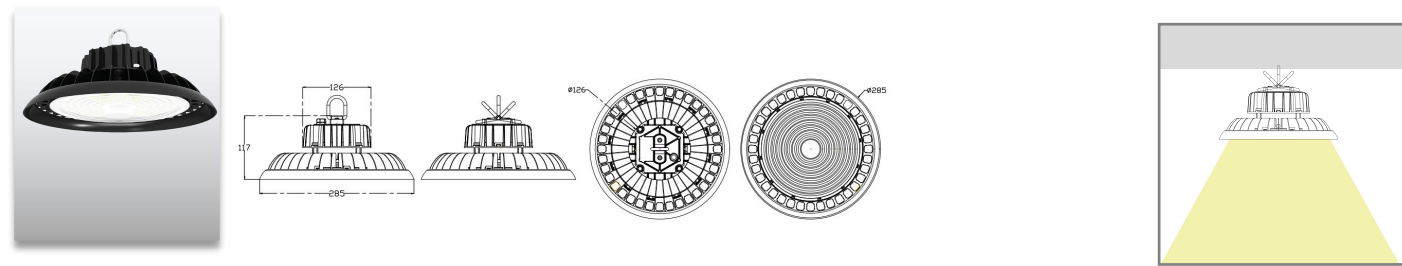



Product Code	Power	Voltage	Color Temperature	Beam Angle	Lumen	Efficiency	IK	IP
AL-MHB01-P150	150W	AC85-300V AC180-528V	2700K-6500K	60°/90°/120°	>22500lm	150lm/W	08	66

Acoustic LED Light

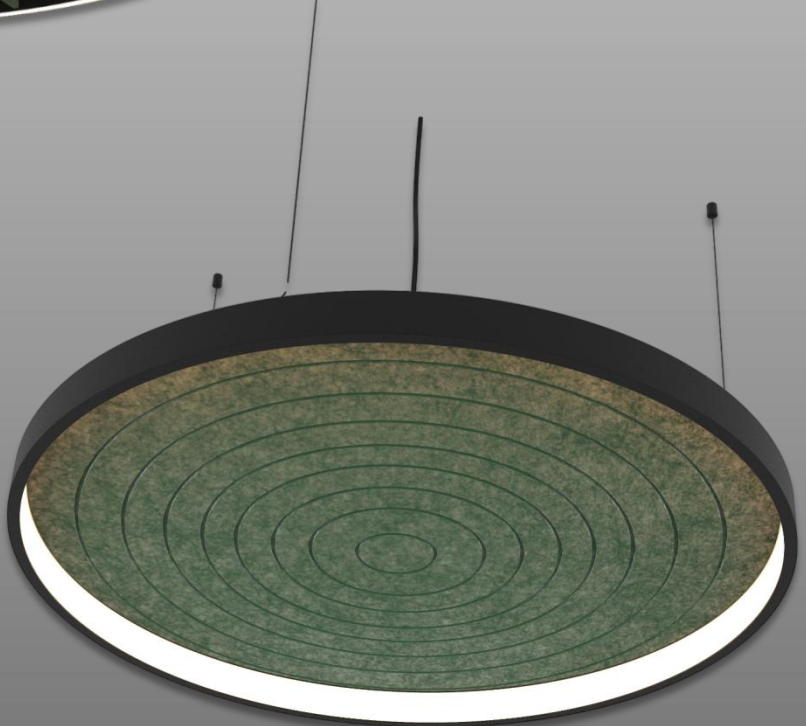
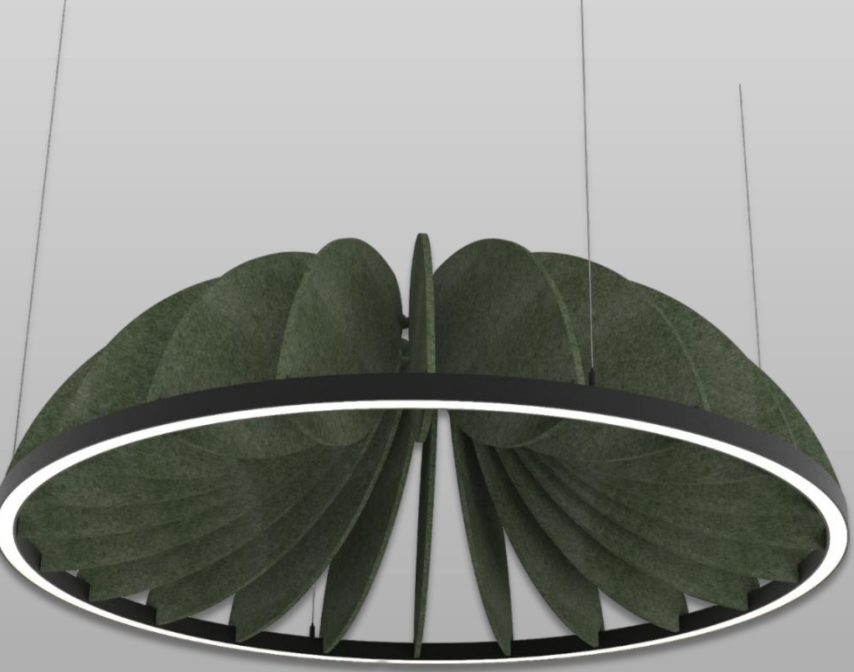


Product Description


- Perfect for commercial space like office, restaurants, banks and hospitals.
- It is designed to combine effective lighting and noise reduction.
- The luminaires are made of environmentally friendly recyclable materials, which greatly reduces resource waste and environmental pollution.
- 40 color options can meet your aesthetic enjoyment of the space.
- We can produce the lights according to your design, it's very easy for us.
- 5 years warranty.
- CE, ROHS, UKCA certified.

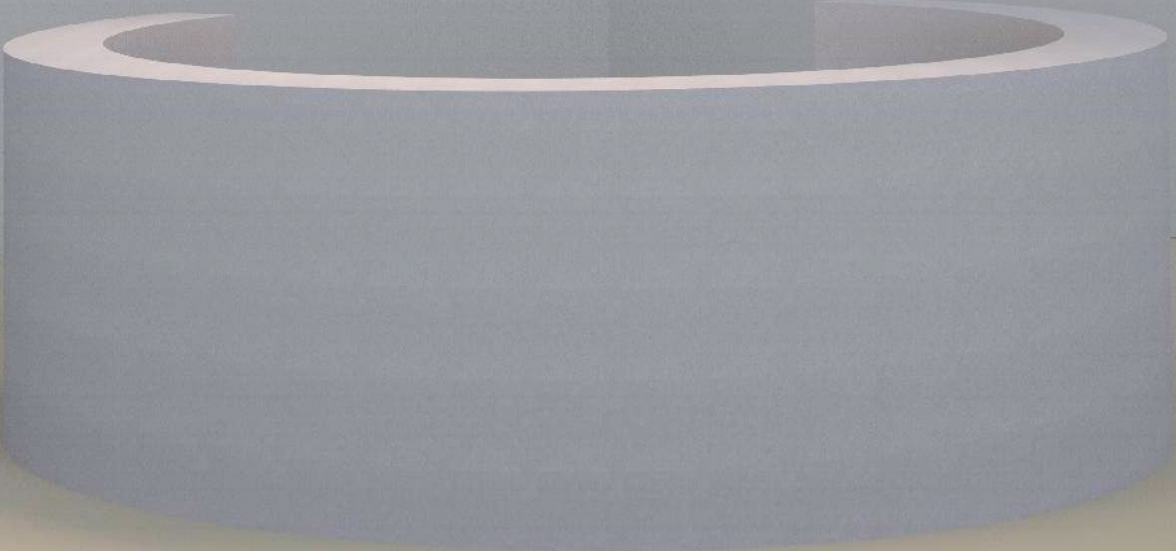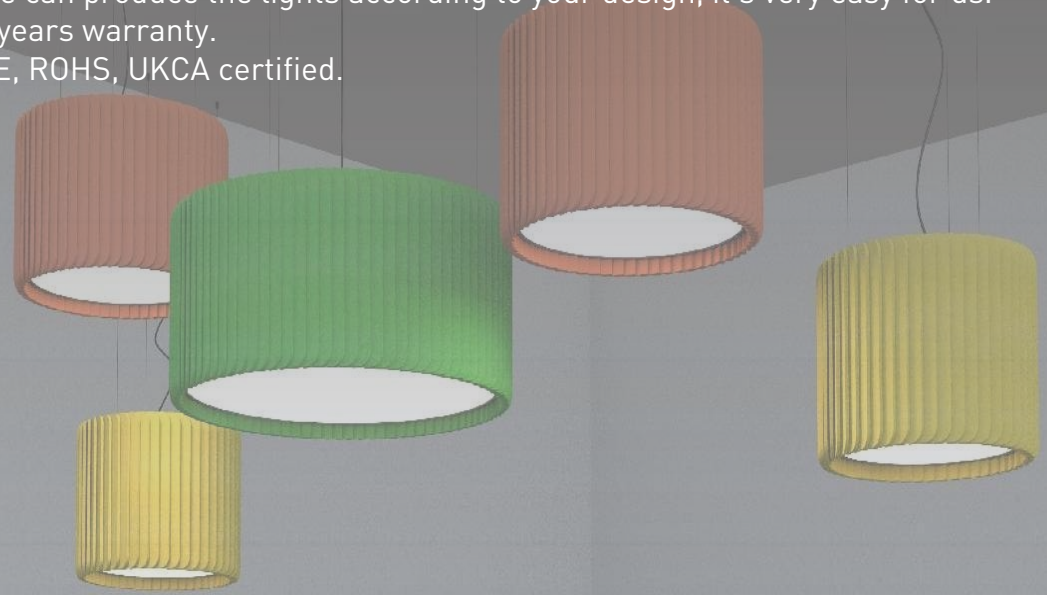


# APOLLO LED Acoustic Light

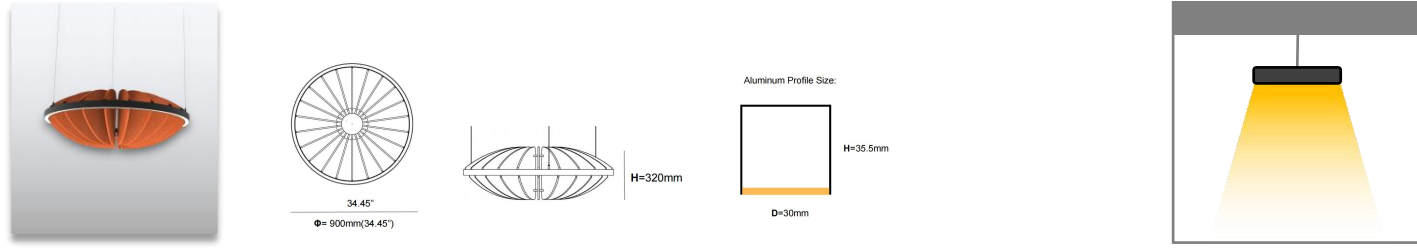

Product Code	Power	Installation	Voltage	Beam Angle	Material	UGR	Sound Absorption Coefficient
APOLLO-ASD900-CT12	55W	Suspended	200-240V	120°	Polyester + Aluminum + Silicone	<26	NRC=0.95

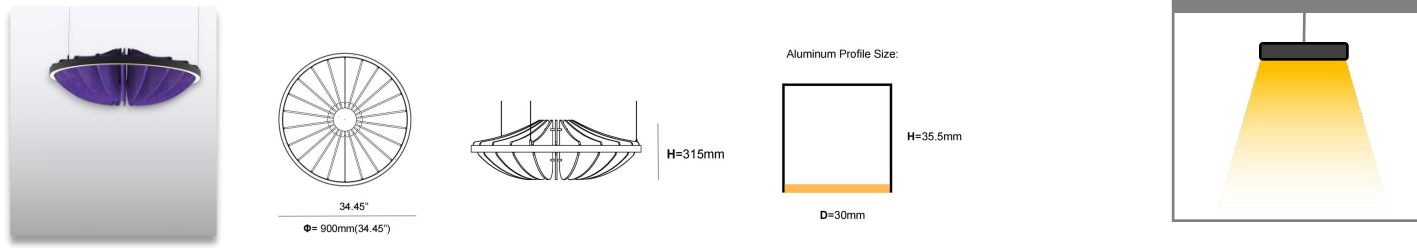


Product Code	Power	Installation	Voltage	Beam Angle	Material	UGR	Sound Absorption Coefficient
APOLLO-ASD900-DT12	55W	Suspended	200-240V	120°	Polyester + Aluminum + Silicone	<26	NRC=0.95

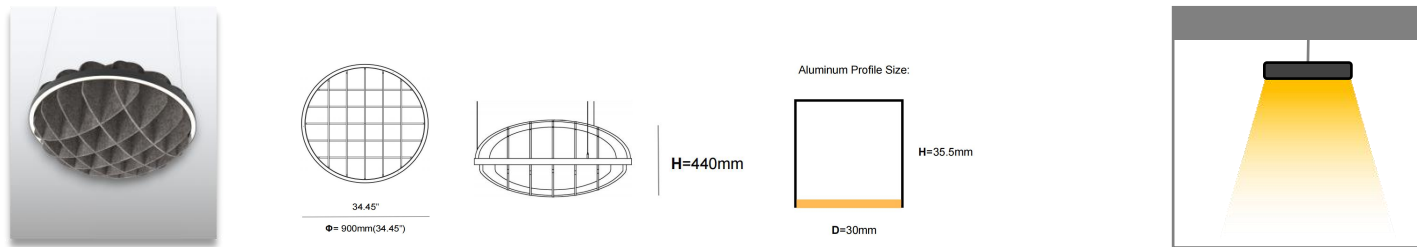

Product Code	Power	Installation	Voltage	Beam Angle	Material	UGR	Sound Absorption Coefficient
APOLLO-ASD900-ET12	55W	Suspended	200-240V	120°	Polyester + Aluminum + Silicone	<26	NRC=0.95

# KOIOS LED Acoustic Light

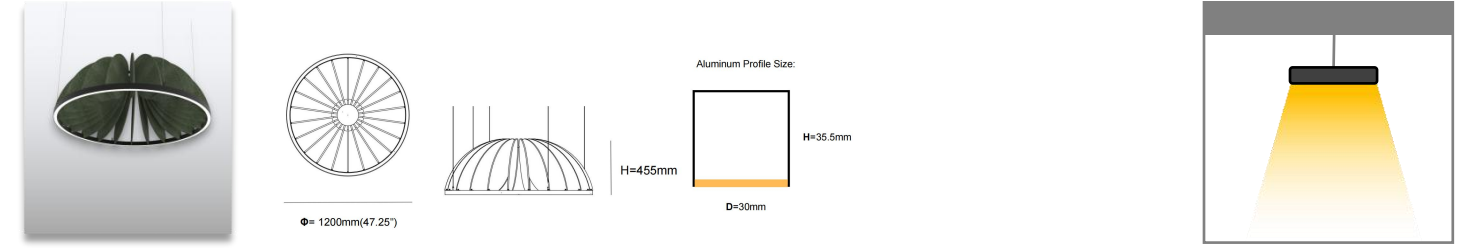


Product Code	Power	Installation	Voltage	Beam Angle	Material	UGR	Sound Absorption Coefficient
APOLLO-ASD1200-BT12	75W	Suspended	200-240V	120°	Polyester + Aluminum + Silicone	<26	NRC=0.95



Product Code	Power	Installation	Voltage	Optic	Material	Lumen(lm)	Sound Absorption Coefficient
KOIOS-RD600-NT12	55W	Suspended	200-240V	Acrylic	Polyester + Aluminum	2475-2750	NRC Max=0.95




Product Code	Power	Installation	Voltage	Beam Angle	Material	UGR	Sound Absorption Coefficient
KOIOS-FMB-D600 KOIOS-FMB-D800 KOIOS-FMB-D1200 KOIOS-FMB-D1500	36-120W	Pendant	200-240V 100-277V	120° 34° 48°	Polyester + Aluminum	<26	NRC=0.95

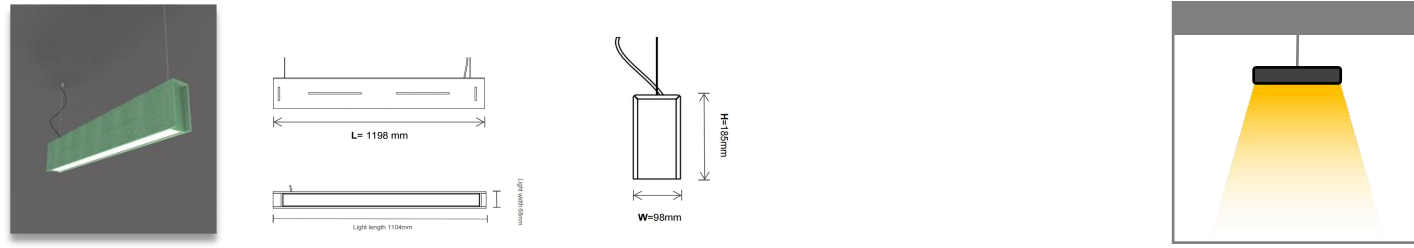


Product Code	Power	Installation	Voltage	Beam Angle	Material	UGR	Sound Absorption Coefficient
APOLLO-ASD900-CT12	55W	Suspended	200-240V	120°	Polyester + Aluminum + Silicone	<26	NRC=0.95




Product Code	Power	Installation	Voltage	Beam Angle	Material	UGR	Sound Absorption Coefficient
APOLLO-ASD900-DT12	55W	Suspended	200-240V	120°	Polyester + Aluminum + Silicone	<26	NRC=0.95

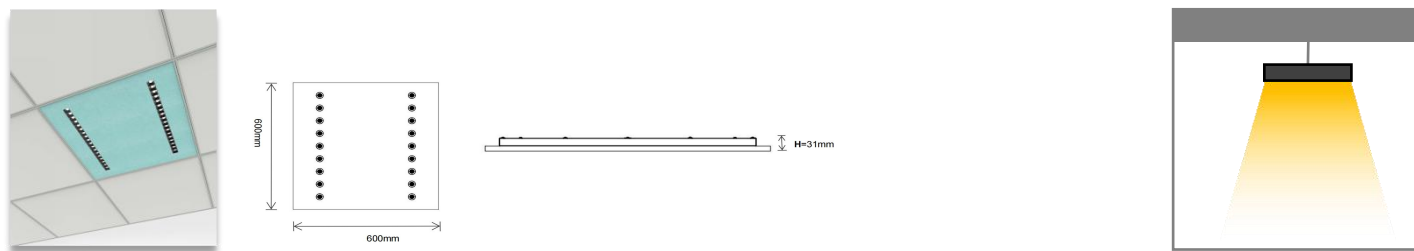

Product Code	Power	Installation	Voltage	Beam Angle	Material	UGR	Sound Absorption Coefficient
APOLLO-ASD900-ET12	55W	Suspended	200-240V	120°	Polyester + Aluminum + Silicone	<26	NRC=0.95

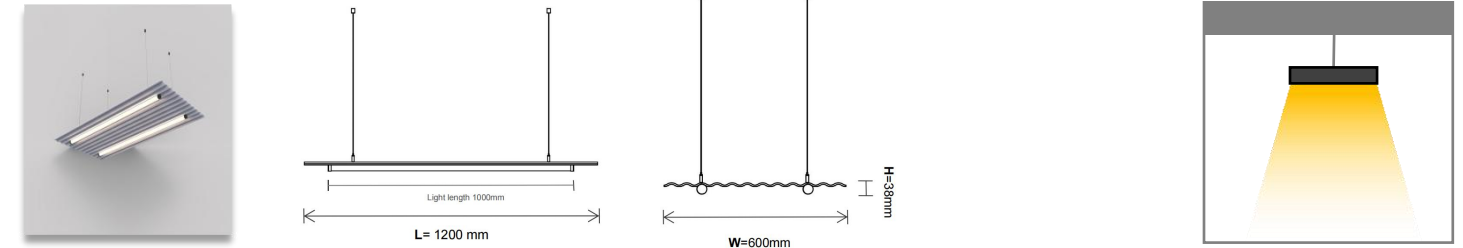


Product Code	Power	Installation	Voltage	Beam Angle	Material	UGR	Sound Absorption Coefficient
APOLLO-ASD1200-BT12	75W	Suspended	200-240V	120°	Polyester + Aluminum + Silicone	<26	NRC=0.95

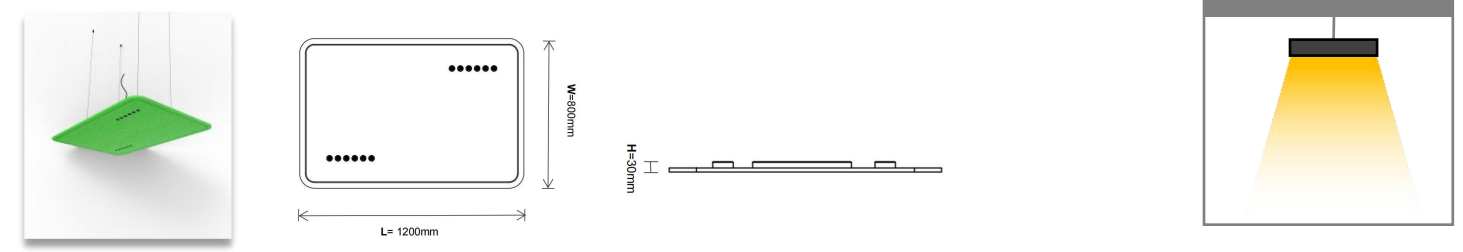

Product Code	Power	Installation	Voltage	Optic	Material	Lumen(lm)	Sound Absorption Coefficient
KOIOS-RD600-NT12	55W	Suspended	200-240V	Acrylic	Polyester + Aluminum	2475-2750	NRC Max=0.95




Product Code	Power	Installation	Voltage	Beam Angle	Material	UGR	Sound Absorption Coefficient
KOIOS-FMB-D600 KOIOS-FMB-D800 KOIOS-FMB-D1200 KOIOS-FMB-D1500	36-120W	Pendant	200-240V 100-277V	120° 34° 48°	Polyester + Aluminum	<26	NRC=0.95

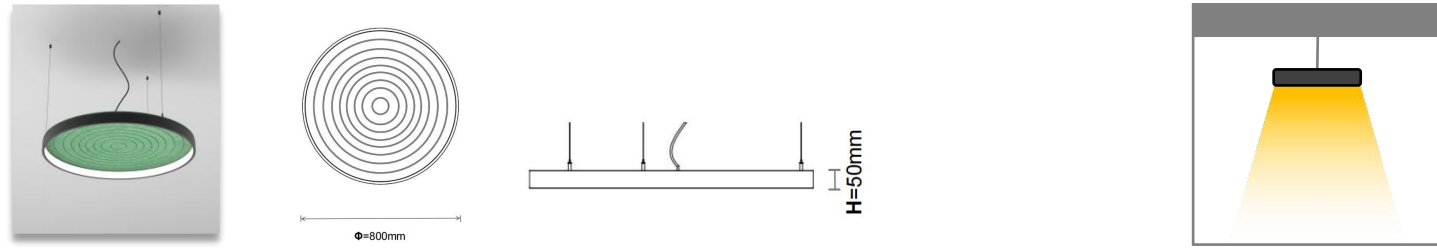


Product Code	Power	Installation	Voltage	Beam Angle	Optic	Lumen	Sound Absorption Coefficient
SELEN-SEH800-T12	32W	Suspended	200-240V	90°	Acrylic board	1440-1600	NRC=0.95




Product Code	Power	Installation	Voltage	Beam Angle	Material	UGR	Sound Absorption Coefficient
SELEN-WB-W320	9W	Pendant	200-240V 100-277V	24° 36°	Polyester + Aluminum + PMMA	<9	NRC=0.95

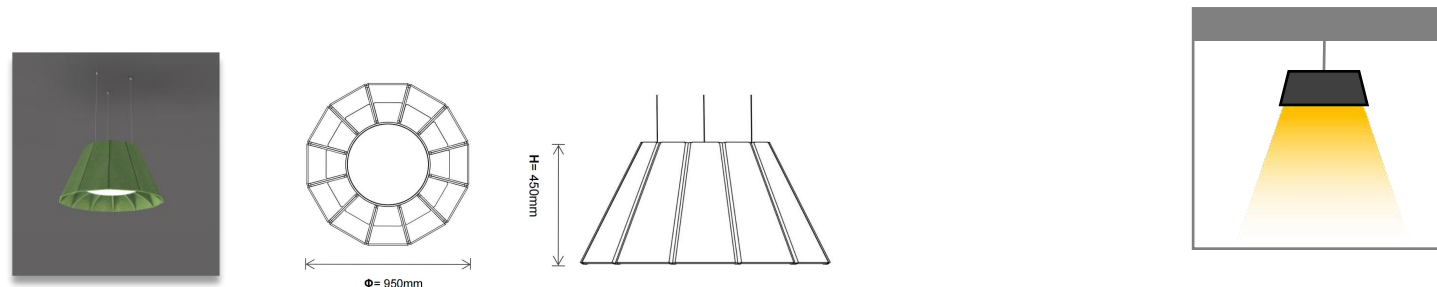


Product Code	Power	Installation	Voltage	Beam Angle	Material	UGR	Sound Absorption Coefficient
SELEN-ASA-CT9	30W	Suspended	200-240V	90°	Polyester + Aluminum	<19	NRC=0.85

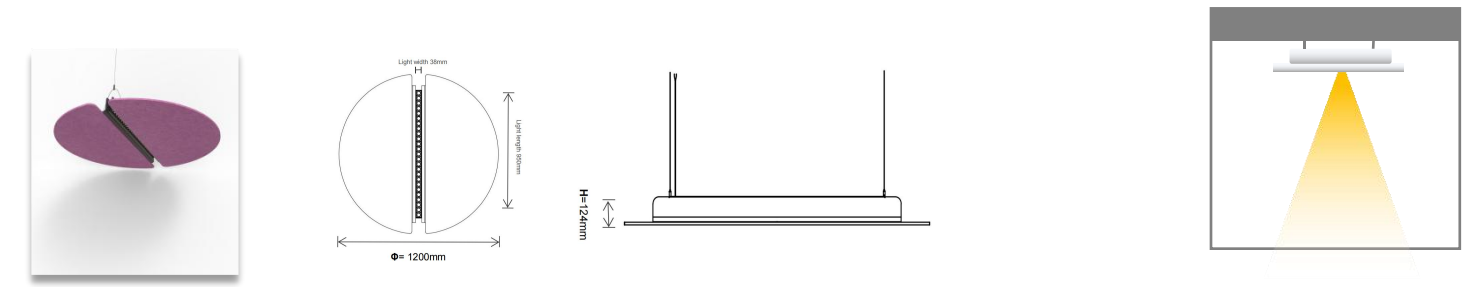

Product Code	Power	Installation	Voltage	Optic	Material	UGR	Sound Absorption Coefficient
SELEN-TR1200-BT12	36W	Suspended	200-240V	38° 50°	Polyester + Aluminum + PMMA	<16	NRC Max=0.95


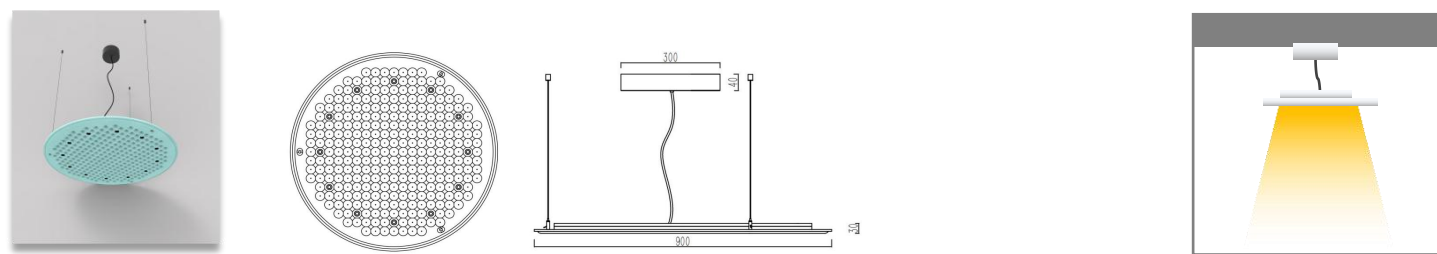


Product Code	Power	Installation	Voltage	Beam Angle	Material	UGR	Sound Absorption Coefficient
KOIOS-GYP-B900	12-18W	Pendant	200-240V 100-277V	38° 50°	Polyester + Aluminum + PMMA	<13	NRC=0.95


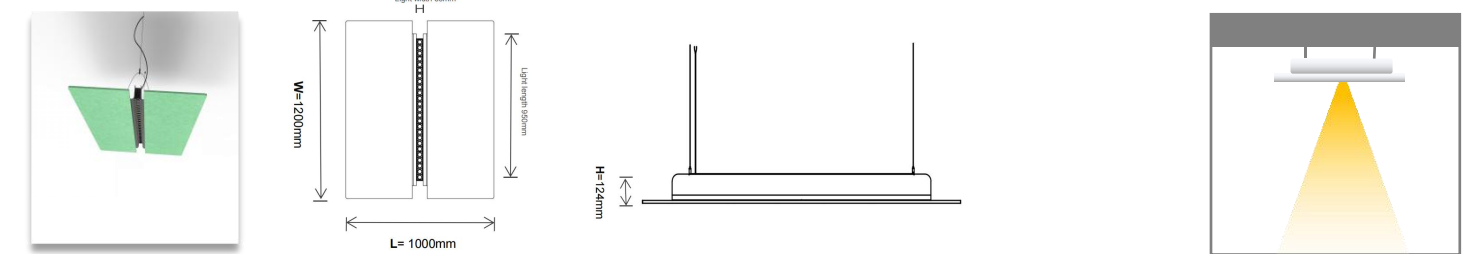


Product Code	Power	Installation	Voltage	Beam Angle	Material	UGR	Sound Absorption Coefficient
SELEN-TS1200-BT12	36W	Suspended	200-240V	38° 50°	Polyester + Aluminum + IRON +PC	<16	NRC=0.85



# DIANA LED Acoustic Light

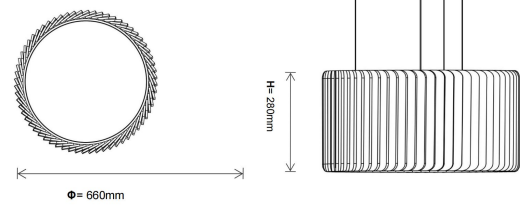



Product Code	Power	Installation	Voltage	Beam Angle	Material	UGR	Sound Absorption Coefficient
DIANA-D660-AT9	36W	Suspension rope	200-240V	90°	Polyester + Aluminum + Iron + PC	<21	NRC=0.95

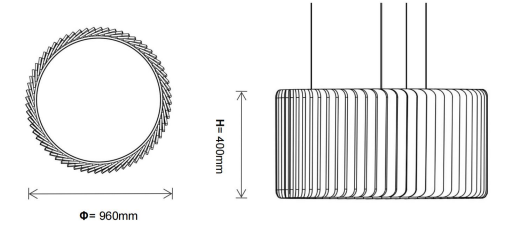

Product Code	Power	Installation	Voltage	Beam Angle	Material	UGR	Sound Absorption Coefficient
DIANA-D960-AT9	50W	Suspended rope	200-240V 100-277V	90°	Polyester + Aluminum + Iron + PC	<21	NRC=0.85

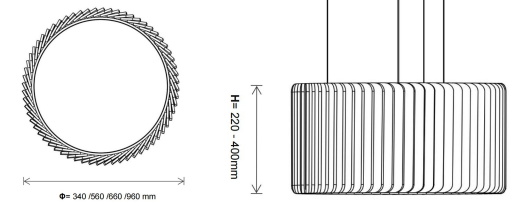

Product Code	Power	Installation	Voltage	Beam Angle	Material	Dimming	Sound Absorption Coefficient
DIANA-D330 DIANA-D560 DIANA-D660 DIANA-D960	15-80W	Suspension rope Suspension rod	200-240V 100-277V	90° 120°	Polyester + Aluminum	DALI 0-10V Triac PUSH	NRC=0.95

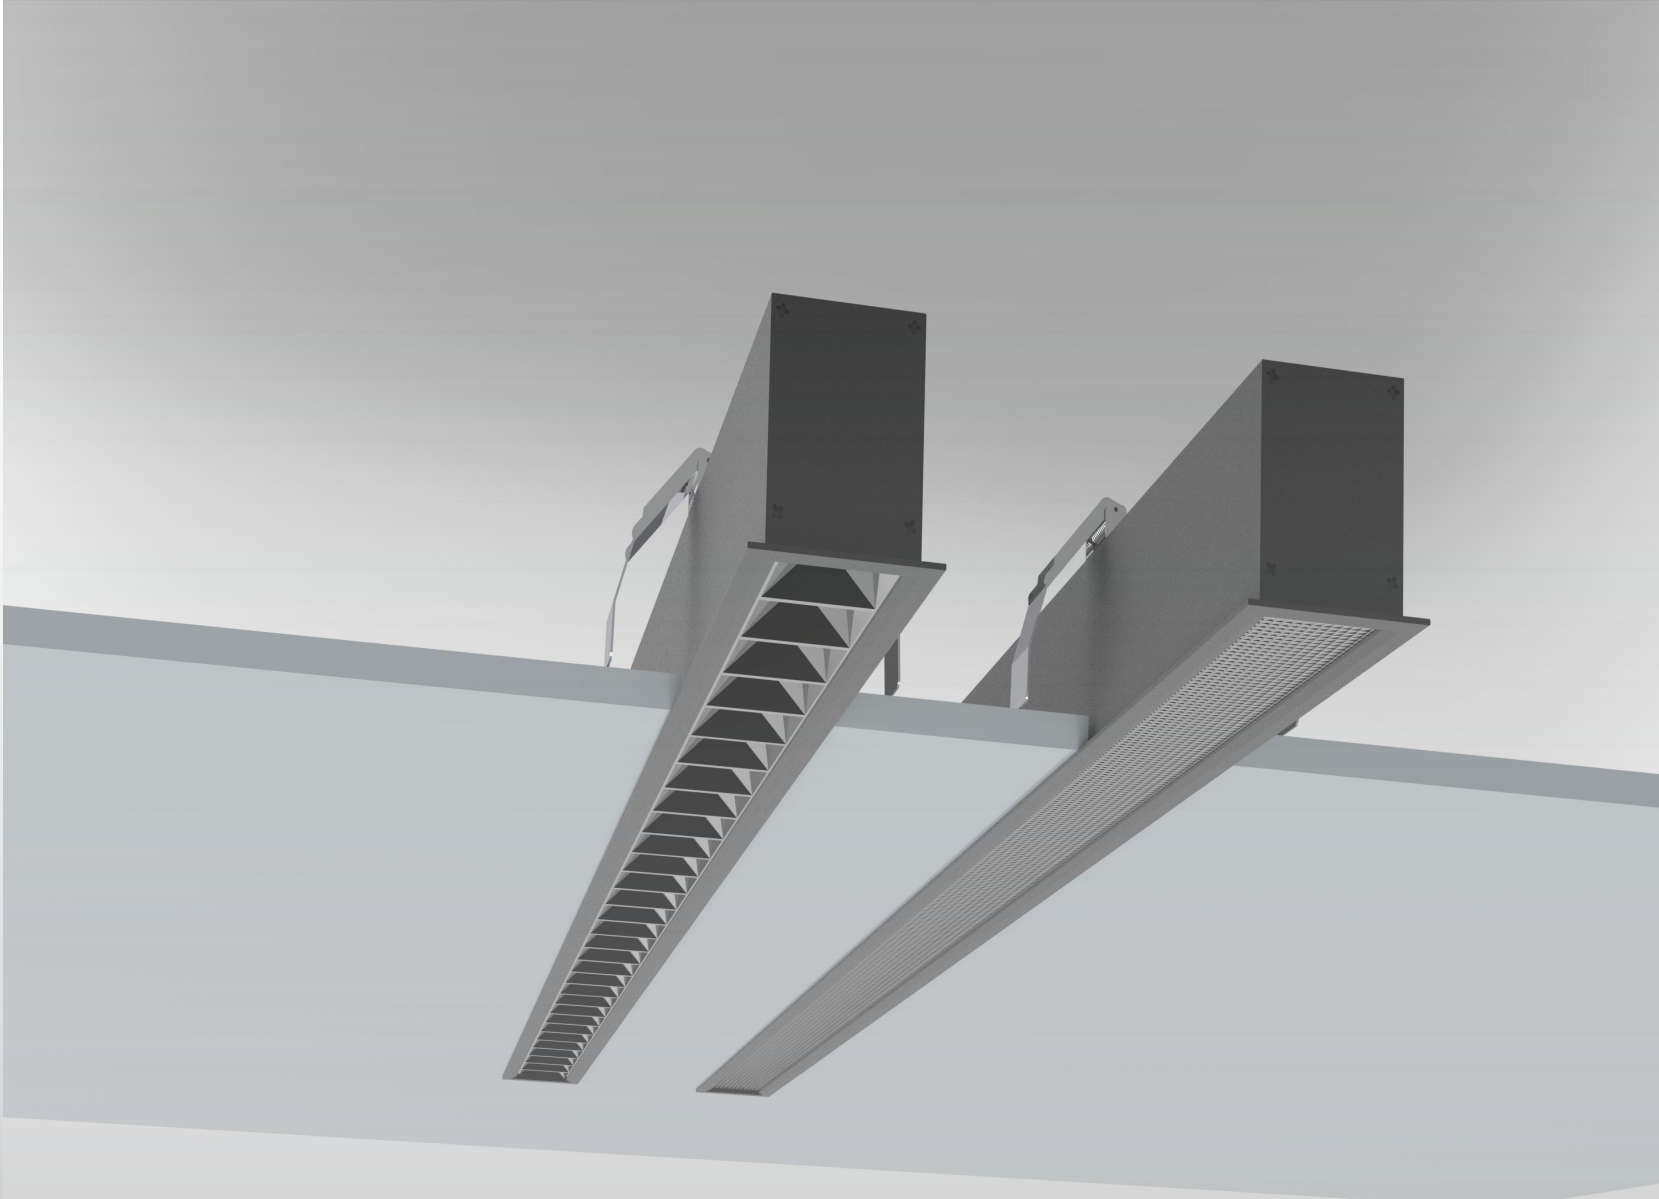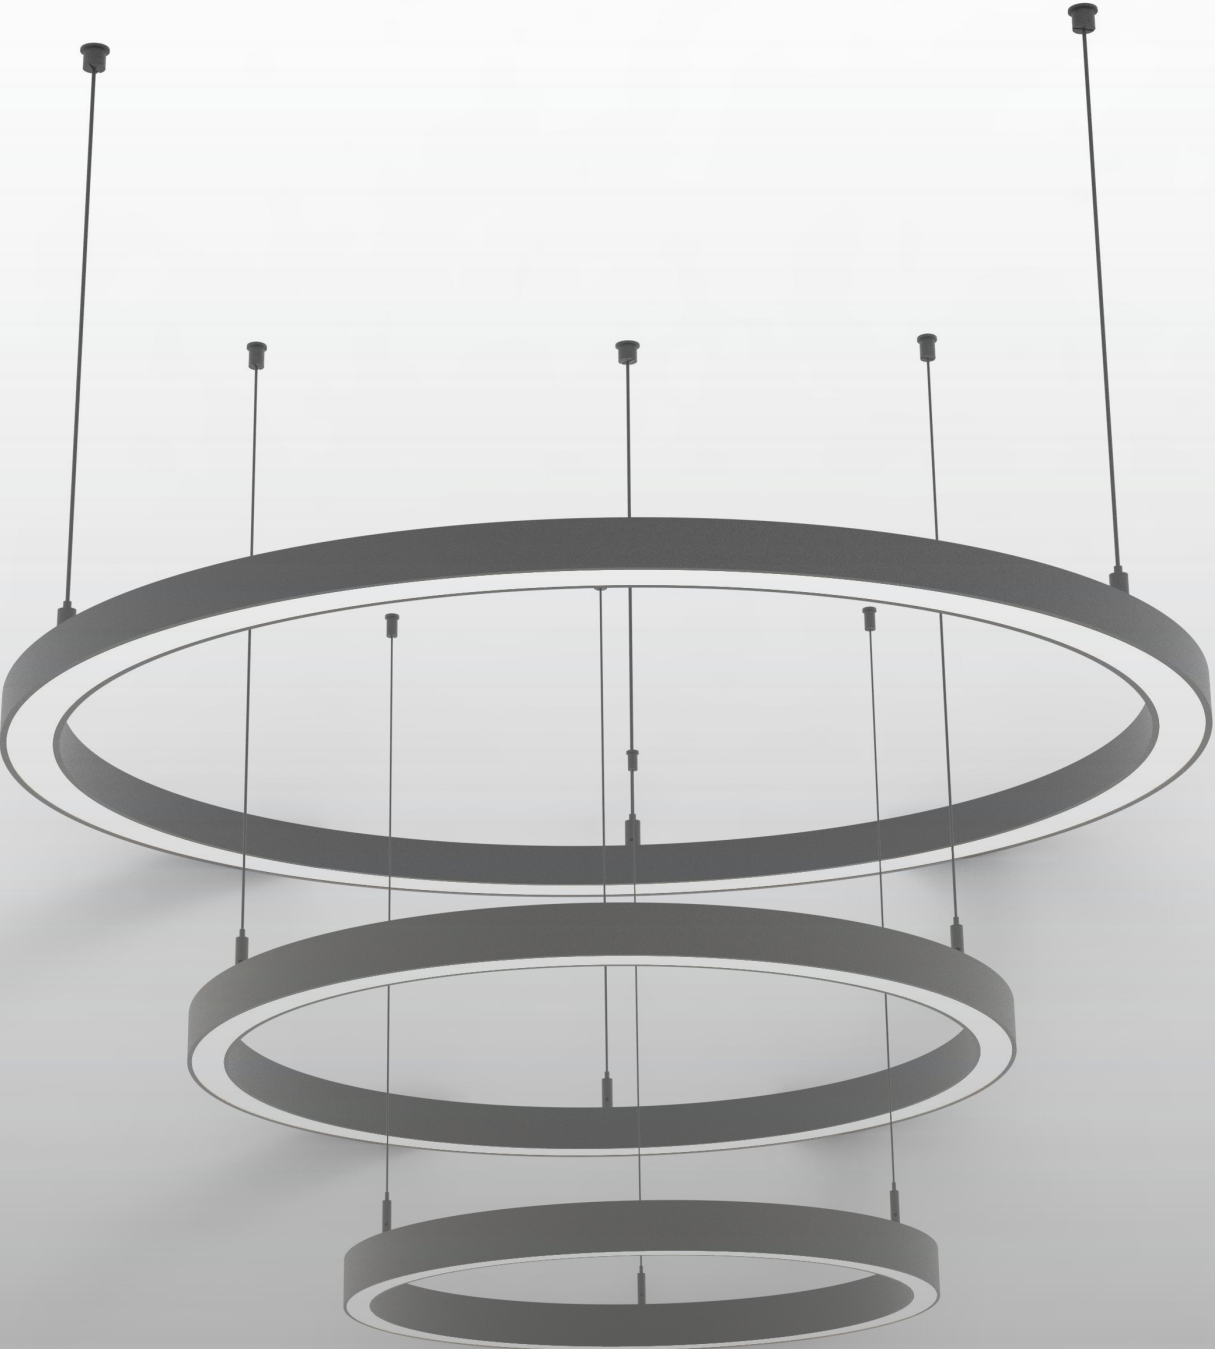




**Product Description**

- The linear light is an ideal choice for office lighting.
- The fixture delivers high efficiency and extraordinary lighting performance with optical lens.
- The light source provides multiple color temperature options : 2700K, 3000K, 4000K, 5700K.
- The extruded aluminum housing is available in a range of finishes.
- We have optimized the position of the LEDs so that the fixture can delivery an uniform light and extraordinary anti-glare lighting effect.

# ASTRO Linear Light







# ORB Linear Light

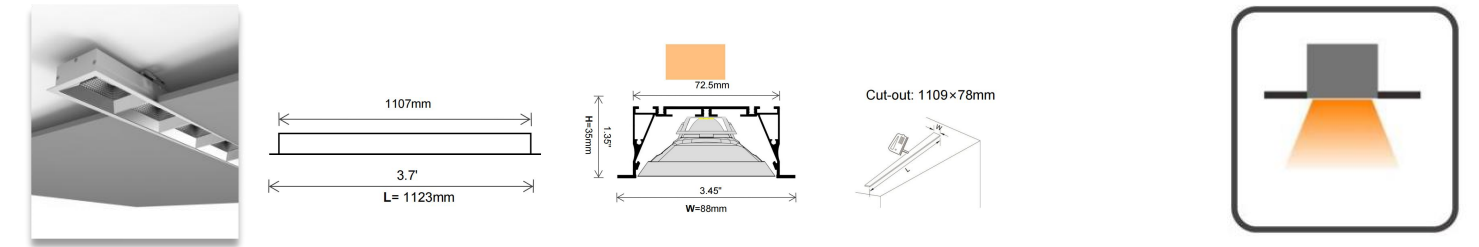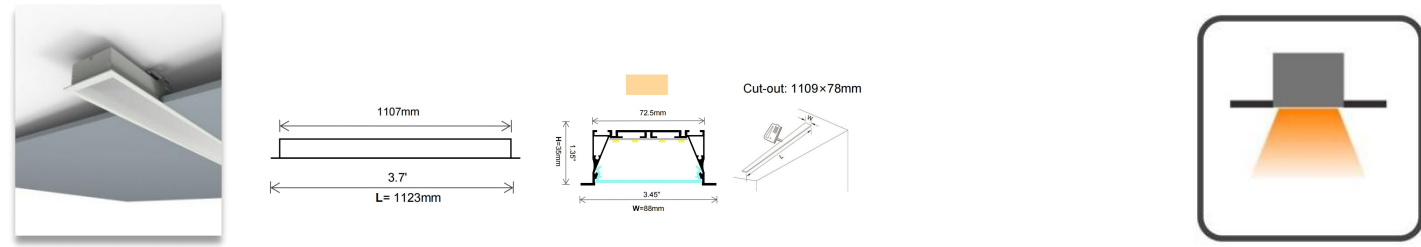





Product Code	Power	Installation	Voltage	Beam Angle	Optic	Lumen	UGR
ASTRO-L8835-MP	28W	Recessed	200-240V 100-277V	90°	Microprismatic	2520-2660lm	UGR<23

Product Code	Power	Installation	Voltage	Beam Angle	Optic	Lumen	UGR
ASTRO-L8835-LN	28W	Recessed	200-240V 100-277V	50°	Lens	2800-2940lm	UGR<19

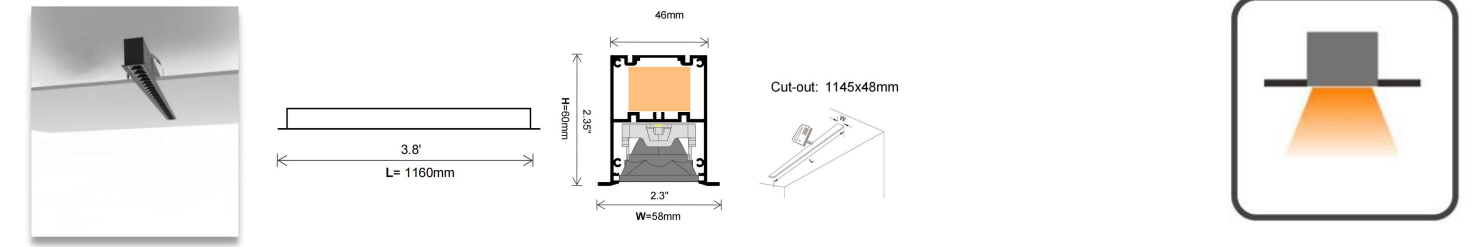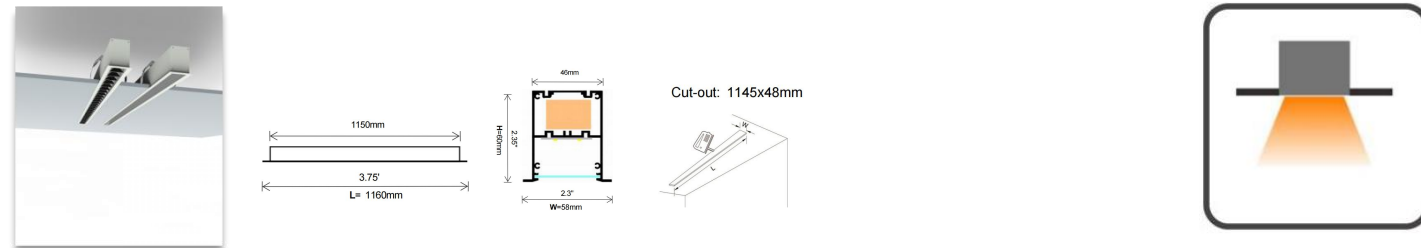


Product Code	Power	Installation	Voltage	Beam Angle	Optic	Lumen	UGR
ASTRO-L5860-MP	36W	Recessed	200-240V 100-277V	90°	Microprismatic	3600-3780lm	UGR<23

Product Code	Power	Installation	Voltage	Beam Angle	Optic	Lumen	UGR
ASTRO-L5860-LN	36W	Recessed	200-240V 100-277V	50°	Lens	3600-3780lm	UGR<16

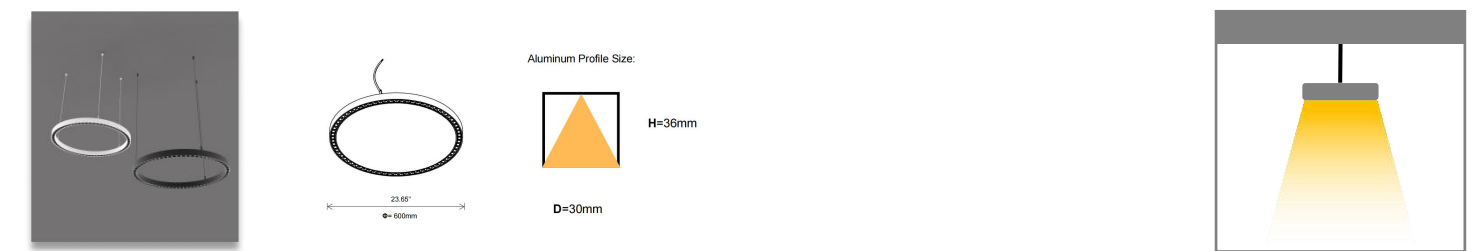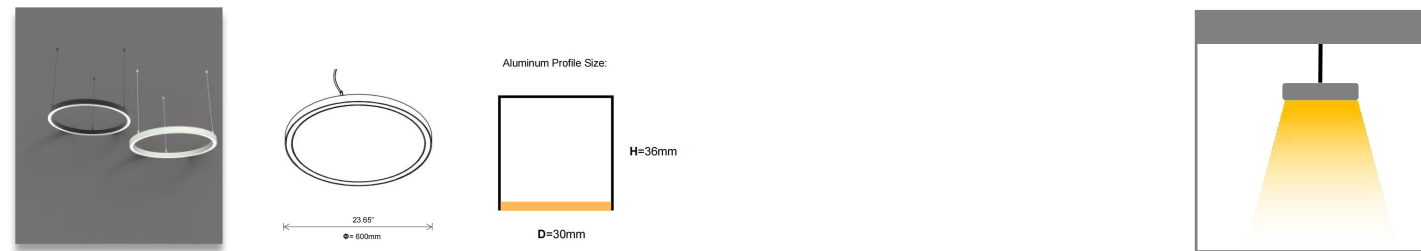

Product Code	Power	Installation	Voltage	Beam Angle	Optic	Lumen	UGR
ORB-R600-PC	34W	Suspended	200-240V 100-277V	120°	Silicone Board	1870-2040lm	UGR<26


Product Code	Power	Installation	Voltage	Beam Angle	Optic	Lumen	UGR
ORB-R600-RC	34W	Suspended	200-240V 100-277V	34° 48°	reflector Cup	2700-2880lm	UGR<6

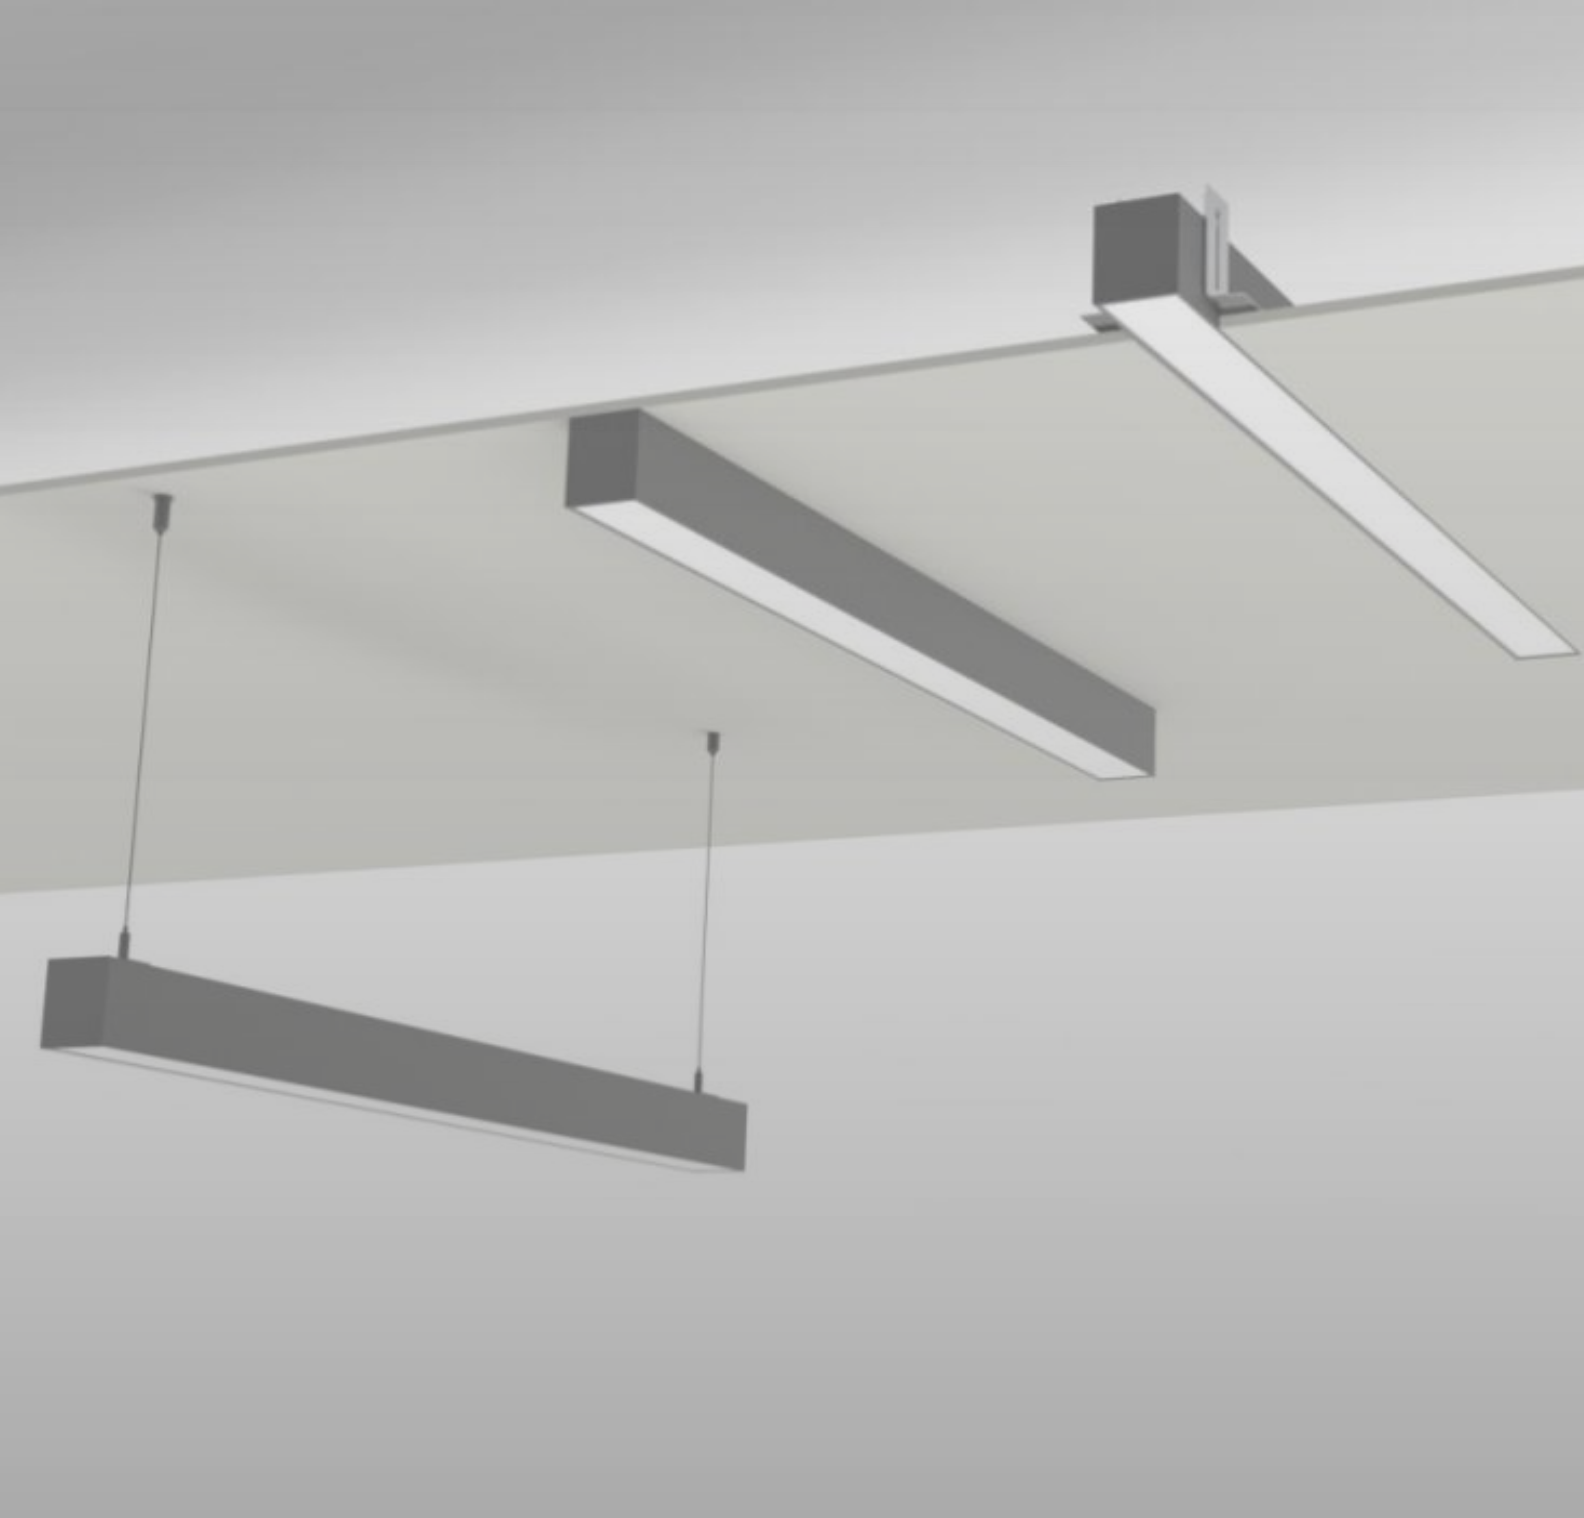


### Product Description

- A&L linear light is a perfect choice for lighting in spaces such as offices, meeting rooms, living rooms, and dining rooms.
- The fixture delivers high efficiency and extraordinary lighting performance.
- The light source provides multiple color temperature options : 2700K, 3000K, 4000K, 5700K.
- The extruded aluminum housing is available in a range of finishes.
- The linear fixture can be installed on ceiling as surface, pendant and recessed light.
- We use microprismatic as its optical diffuser and optimize position of the LED, so that it comes out with uniform light and an extraordinary anti - glare effect.
- The microprismatic diffuser allows customers to cut it randomly according to the length required on site during installation.




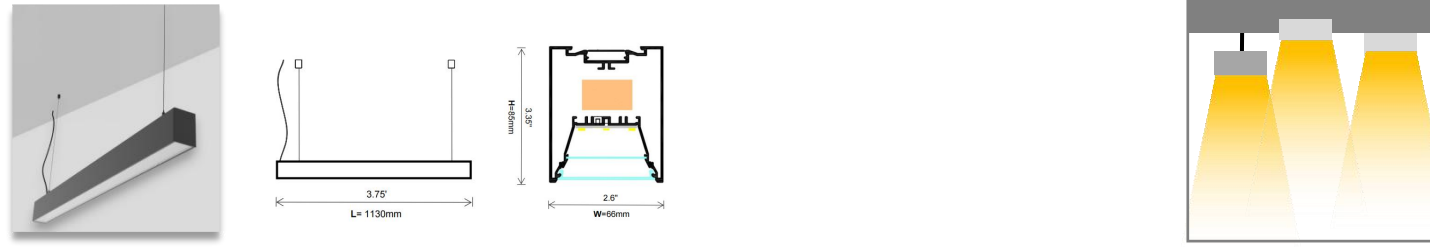


Product Code	Power	Installation	Voltage	Beam Angle	Optic	Lumen	UGR
STLAR-L6685-SP	28W	Suspended Surface Recessed	200-240V 100-277V	90°	Microprismatic	2660-2800lm	UGR<25

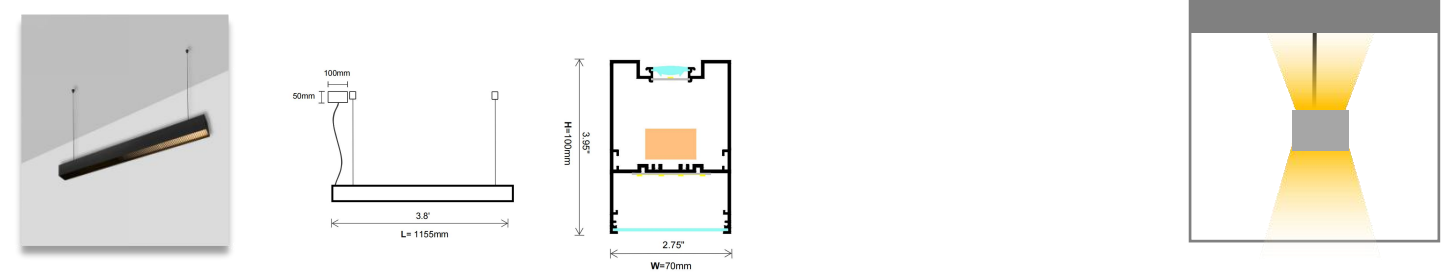


Product Code	Power	Installation	Voltage	Beam Angle	Optic	Lumen	UGR
STLAR-L70100-MP	36W	Suspended	200-240V 100-277V	90°	Microprismatic	3600-3780lm	UGR<19

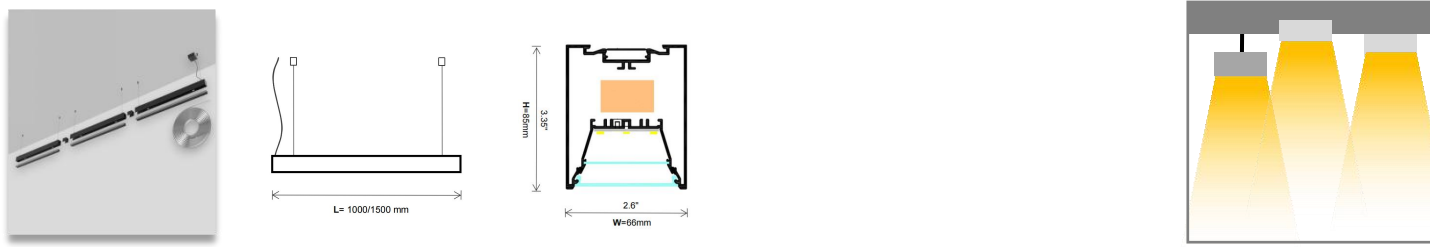


Product Code	Power	Installation	Voltage	Beam Angle	Optic	Lumen	UGR
STLAR-L6685-XP	30W	Suspended Surface Recessed	200-240V 100-277V	38°	Lens	3150-3300lm	UGR<9

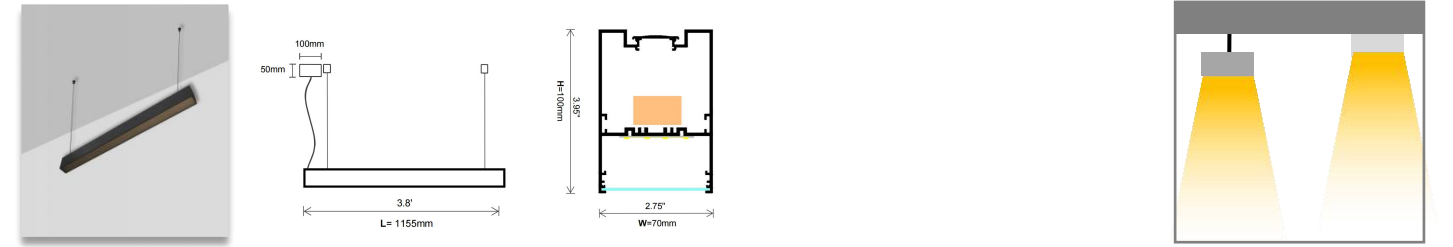

Product Code	Power	Installation	Voltage	Beam Angle	Optic	Lumen	UGR
STLAR-L70100-HC	45W	Suspended	200-240V 100-277V	60°	Honeycomb	1800-2025lm	UGR<13

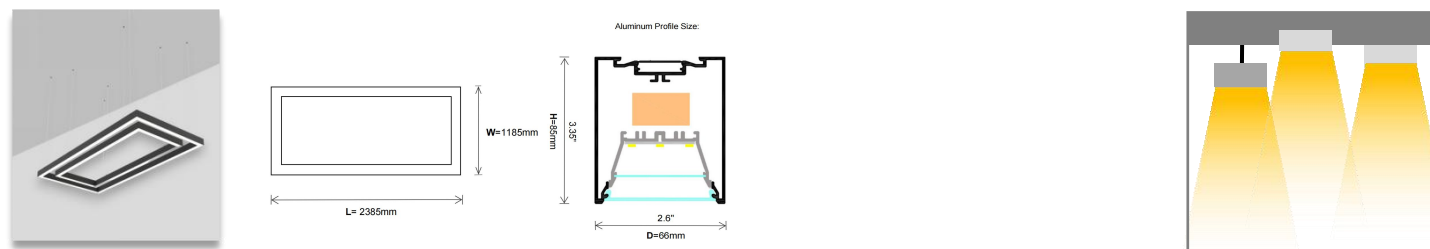


Product Code	Power	Installation	Voltage	Beam Angle	Optic	Lumen	UGR
STLAR-L6685-RP	200W	Suspended Surface Recessed	200-240V 100-277V	90°	Push type microprismatic diffuser	17000-18000lm	UGR<25

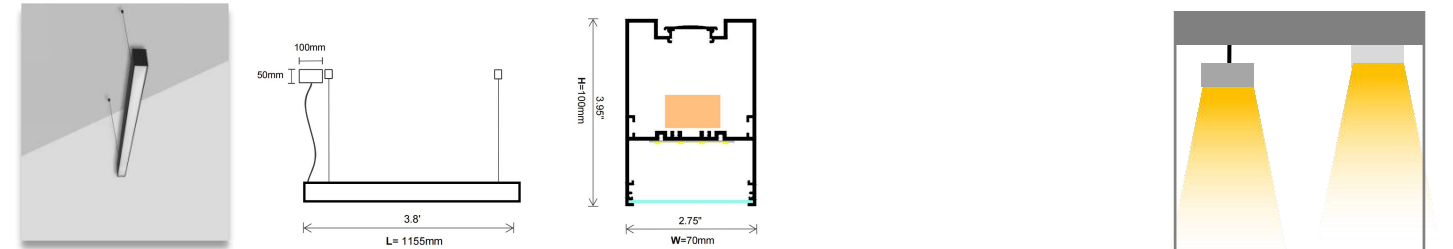


Product Code	Power	Installation	Voltage	Beam Angle	Optic	Lumen	UGR
STLAR-L70100-BL	45W	Suspended Surface	200-240V 100-277V	90°	Blade Louver	2660-2800lm	UGR<19


# LED Linear Light

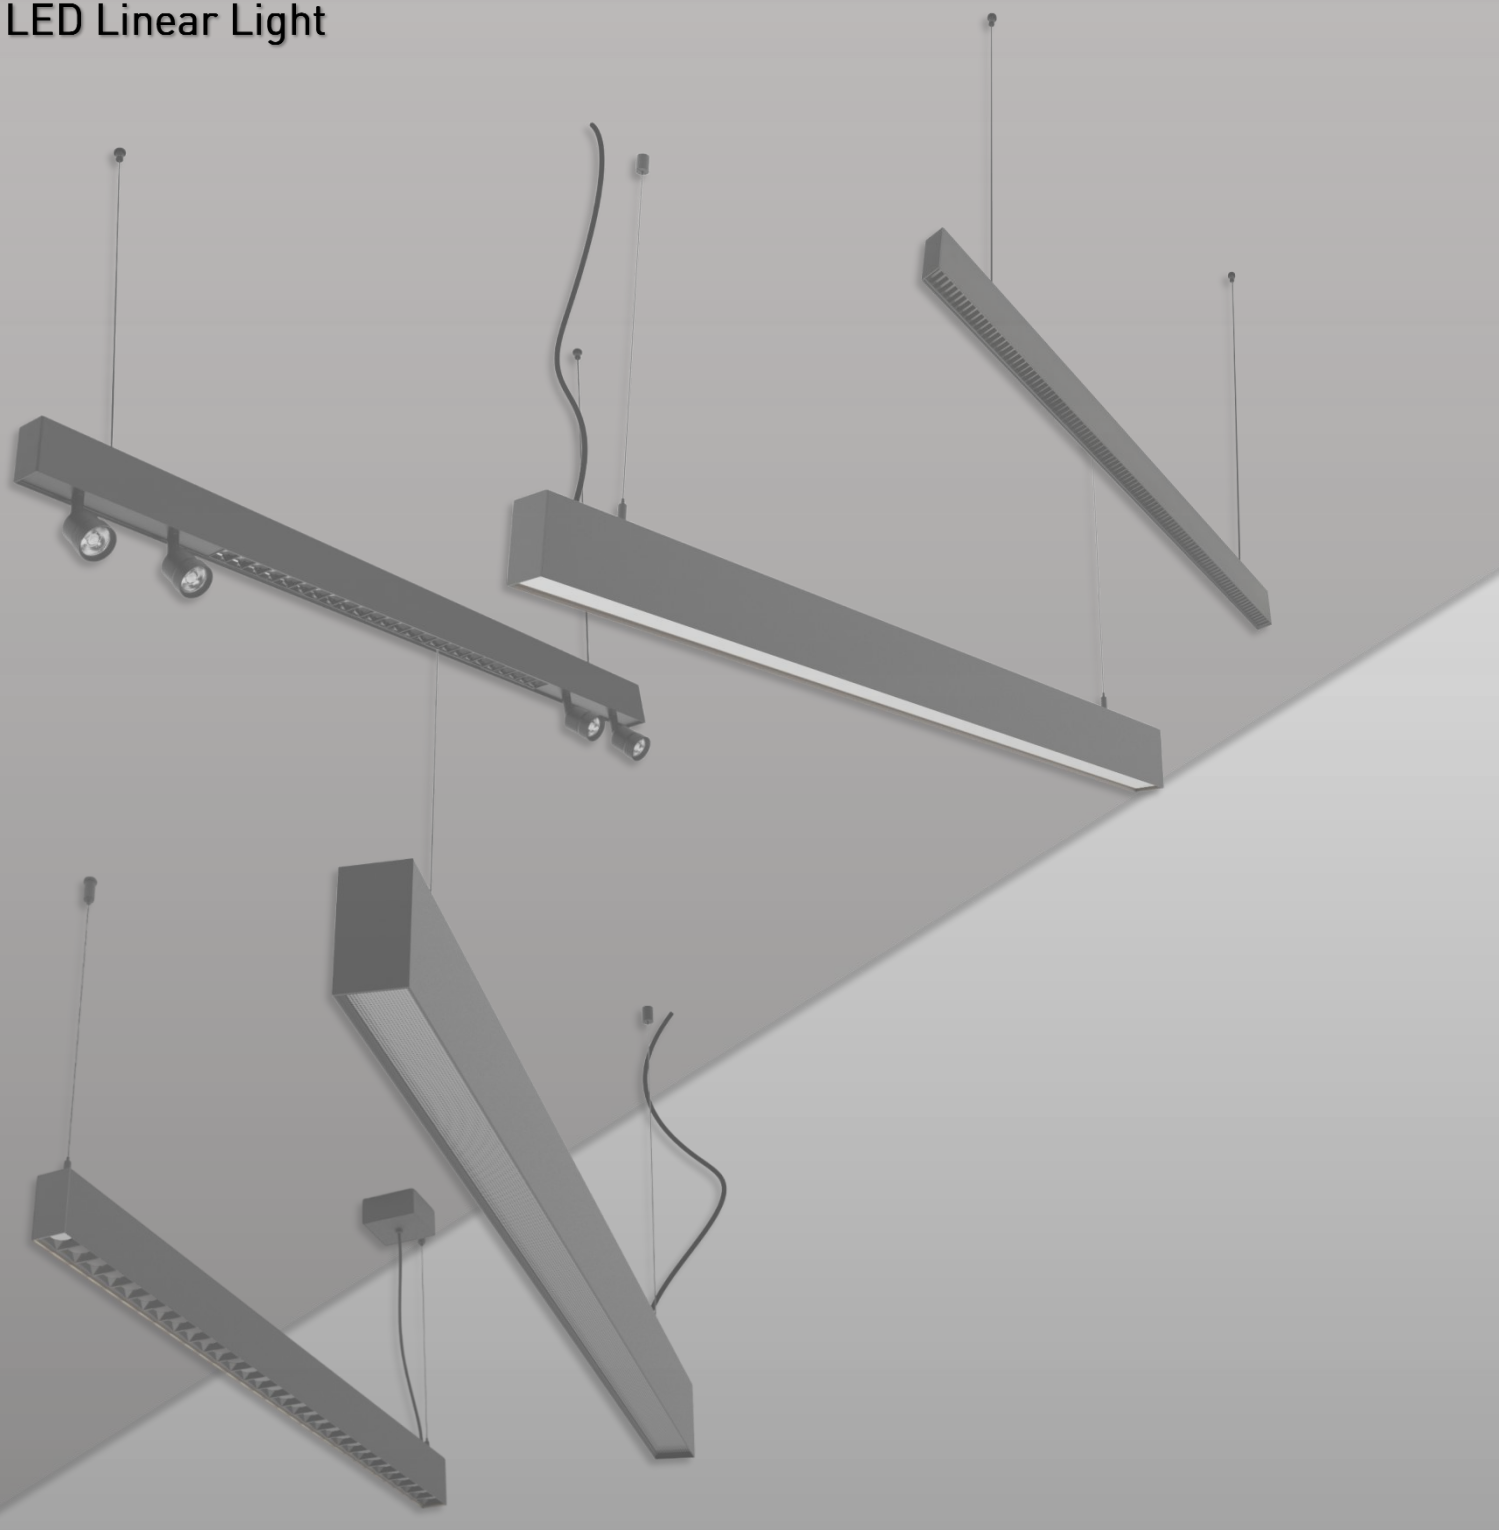

## Product Description



- SLIM-L3874 is a slim suspended linear fixture with various optical accessory options:
- SLIM-L3874-BL: with blade louver
- SLIM-L3874-MP: with microprismatic diffuser
- SLIM-L3874-HC: with honeycomb
- SLIM-L3874-RC: with reflector cup
- SLIM-L3874-2S3C2S: with a combination of rotatable spotlights and reflector cups
- The fixture delivers high efficiency and extraordinary lighting performance.
- The light source provides multiple color temperature options : 2700K, 3000K, 4000K, 5700K.
- It comes in black, white and gray options and has two suspension points that are adjustable in height.
- We have optimized the position of the LEDs so that the fixture can delivery an uniform light and extraordinary anti-glare lighting effect.
- It is a perfect choice for lighting in spaces such as offices, meeting rooms, living rooms, and dining rooms.

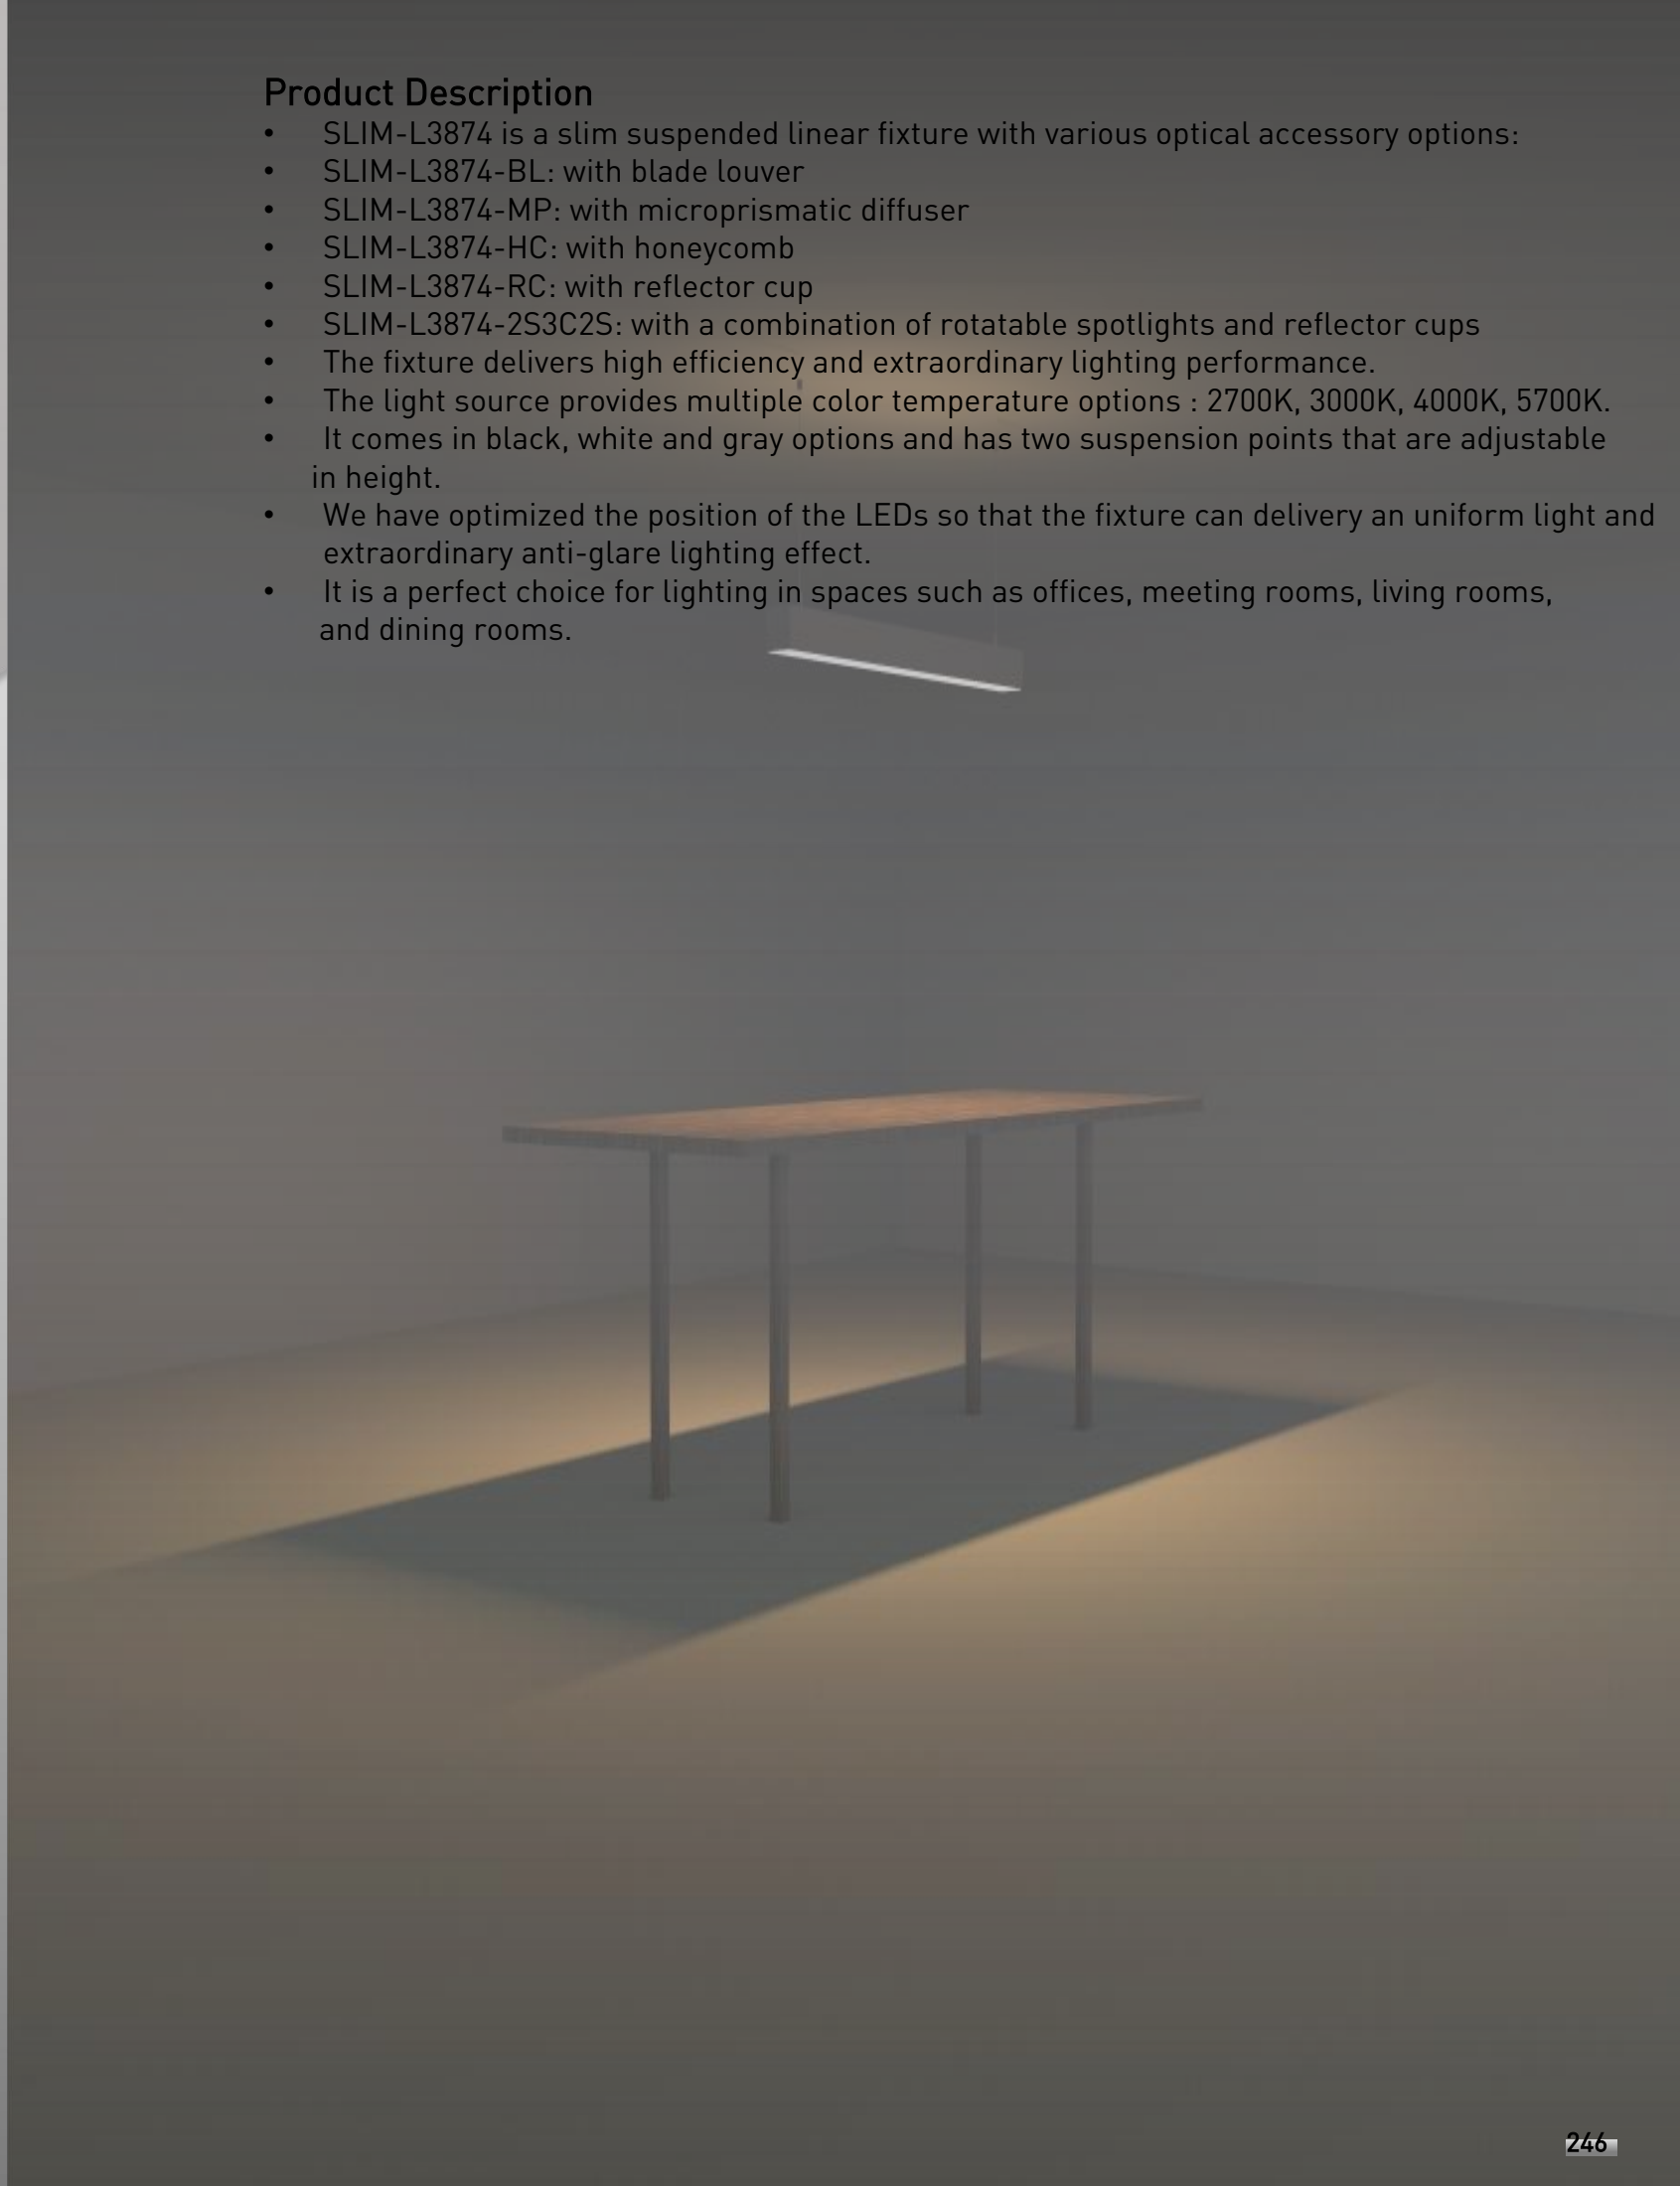

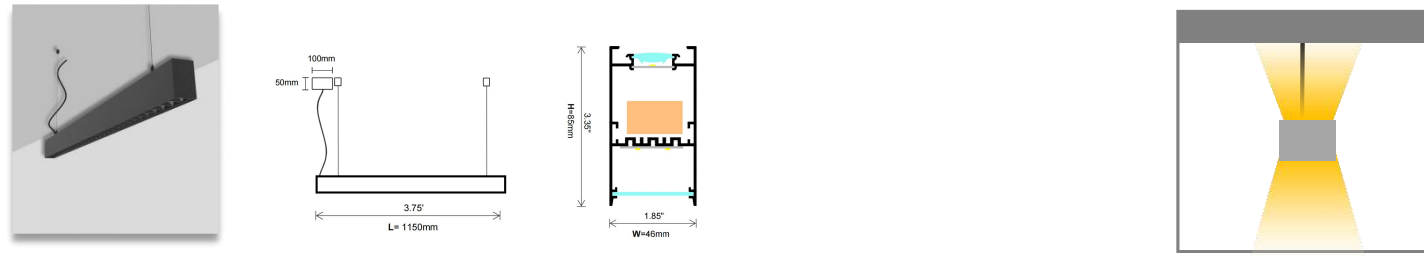


Product Code	Power	Installation	Voltage	Beam Angle	Optic	Lumen	UGR
STLAR-L70100-BL	45W	Suspended Surface	200-240V 100-277V	90°	Blade Louver	2660-2800lm	UGR<19

Product Code	Power	Installation	Voltage	Beam Angle	Optic	Lumen	UGR
STLAR-L8085-LN	36W	Suspended	200-240V 100-277V	70°	Lens	3600-3780lm	UGR<19

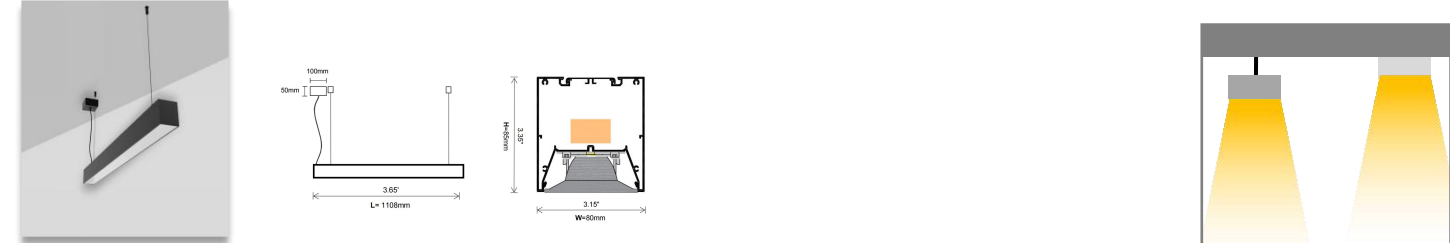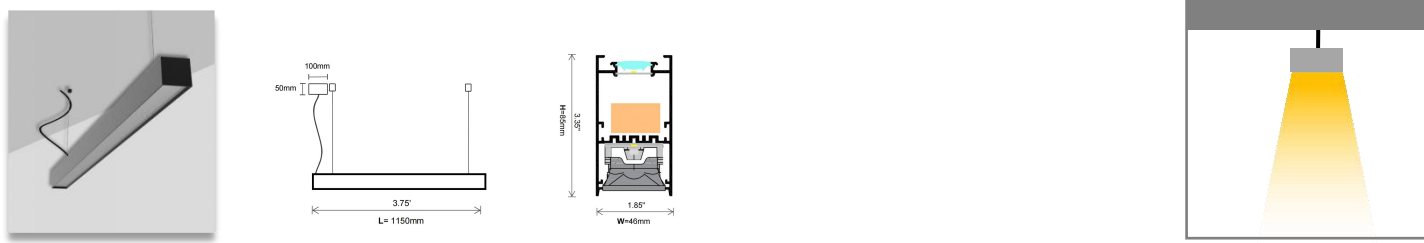


Product Code	Power	Installation	Voltage	Beam Angle	Optic	Lumen	UGR
SLIM-L4685-LN	30W	Suspended	200-240V 100-277V	38°	Lens	3150-3300lm	UGR<9

Product Code	Power	Installation	Voltage	Beam Angle	Optic	Lumen	UGR
STLAR-L8085-MP	45W	Suspended Surface	200-240V 100-277V	90°	Microprismatic	3780-3960lm	UGR<19


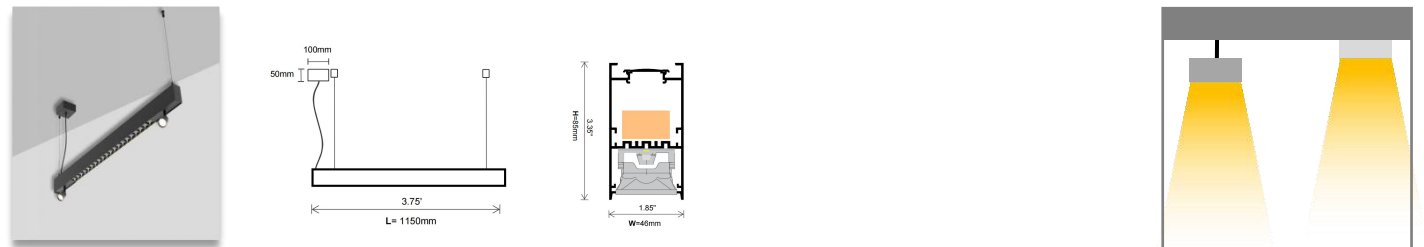


Product Code	Power	Installation	Voltage	Beam Angle	Optic	Lumen	UGR
SLIM-L4685-1S1L1S	36W	Suspended Surface	200-240V 100-277V	50° + 20°	Lens + Rotatable Spotlights	2520-2700lm	UGR<16

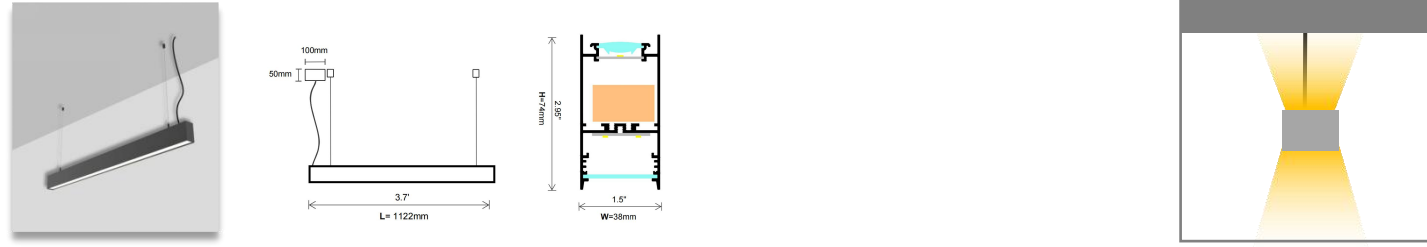


Product Code	Power	Installation	Voltage	Beam Angle	Optic	Lumen	UGR
SLIM-L3874-MP	28W	Suspended	200-240V 100-277V	90°	Microprismatic	2660-2800lm	UGR<19

Product Code	Power	Installation	Voltage	Beam Angle	Optic	Lumen	UGR
SLIM-L3874-BL	36W	Suspended	200-240V 100-277V	90°	Blade Louver	1440-1620lm	UGR<19

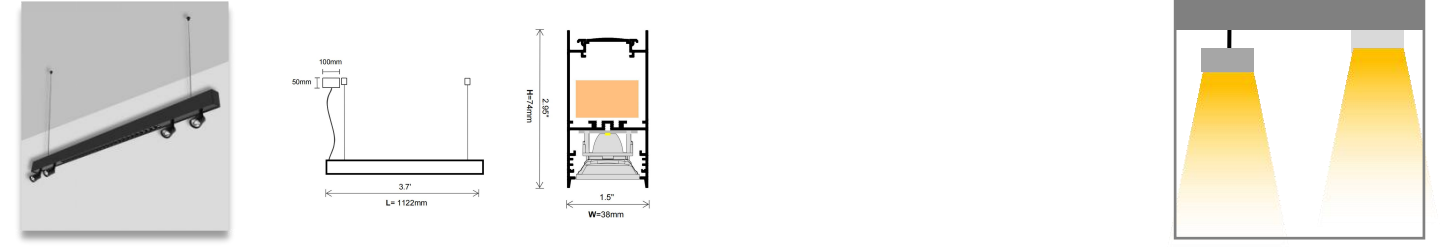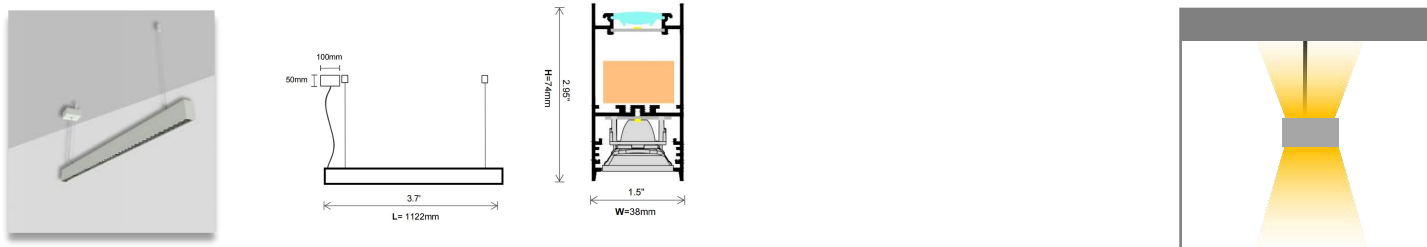


Product Code	Power	Installation	Voltage	Beam Angle	Optic	Lumen	UGR
SLIM-L3874-RC	28W	Suspended	200-240V 100-277V	48°	Reflector Cup	1440-1620lm	UGR<16

Product Code	Power	Installation	Voltage	Optic	Optic	Lumen	UGR
SLIM-L3874-2S3C2S	36W	Suspended	200-240V 100-277V	48° + 20°	Lens + Rotatable Spotlights	2520-2700lm	UGR<16

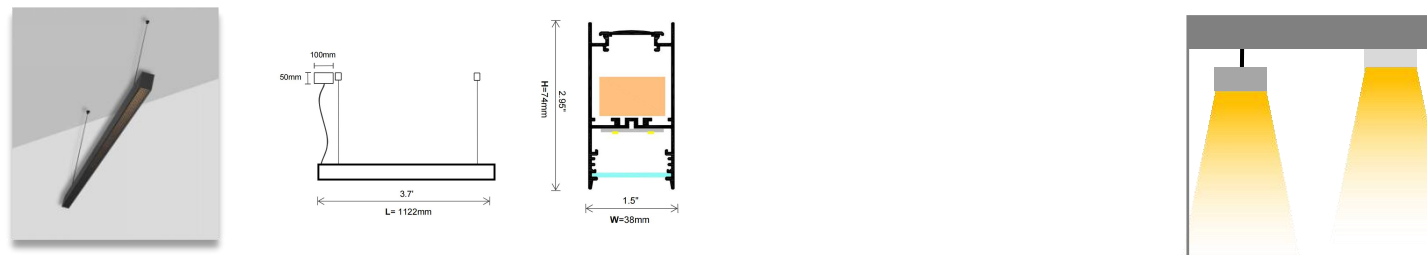

Product Code	Power	Installation	Voltage	Beam Angle	Optic	Lumen	UGR
SLIM-L3874-HC	36W	Suspended	200-240V 100-277V	60°	Honeycomb	1080-1260lm	UGR<16

## LED Panel Light

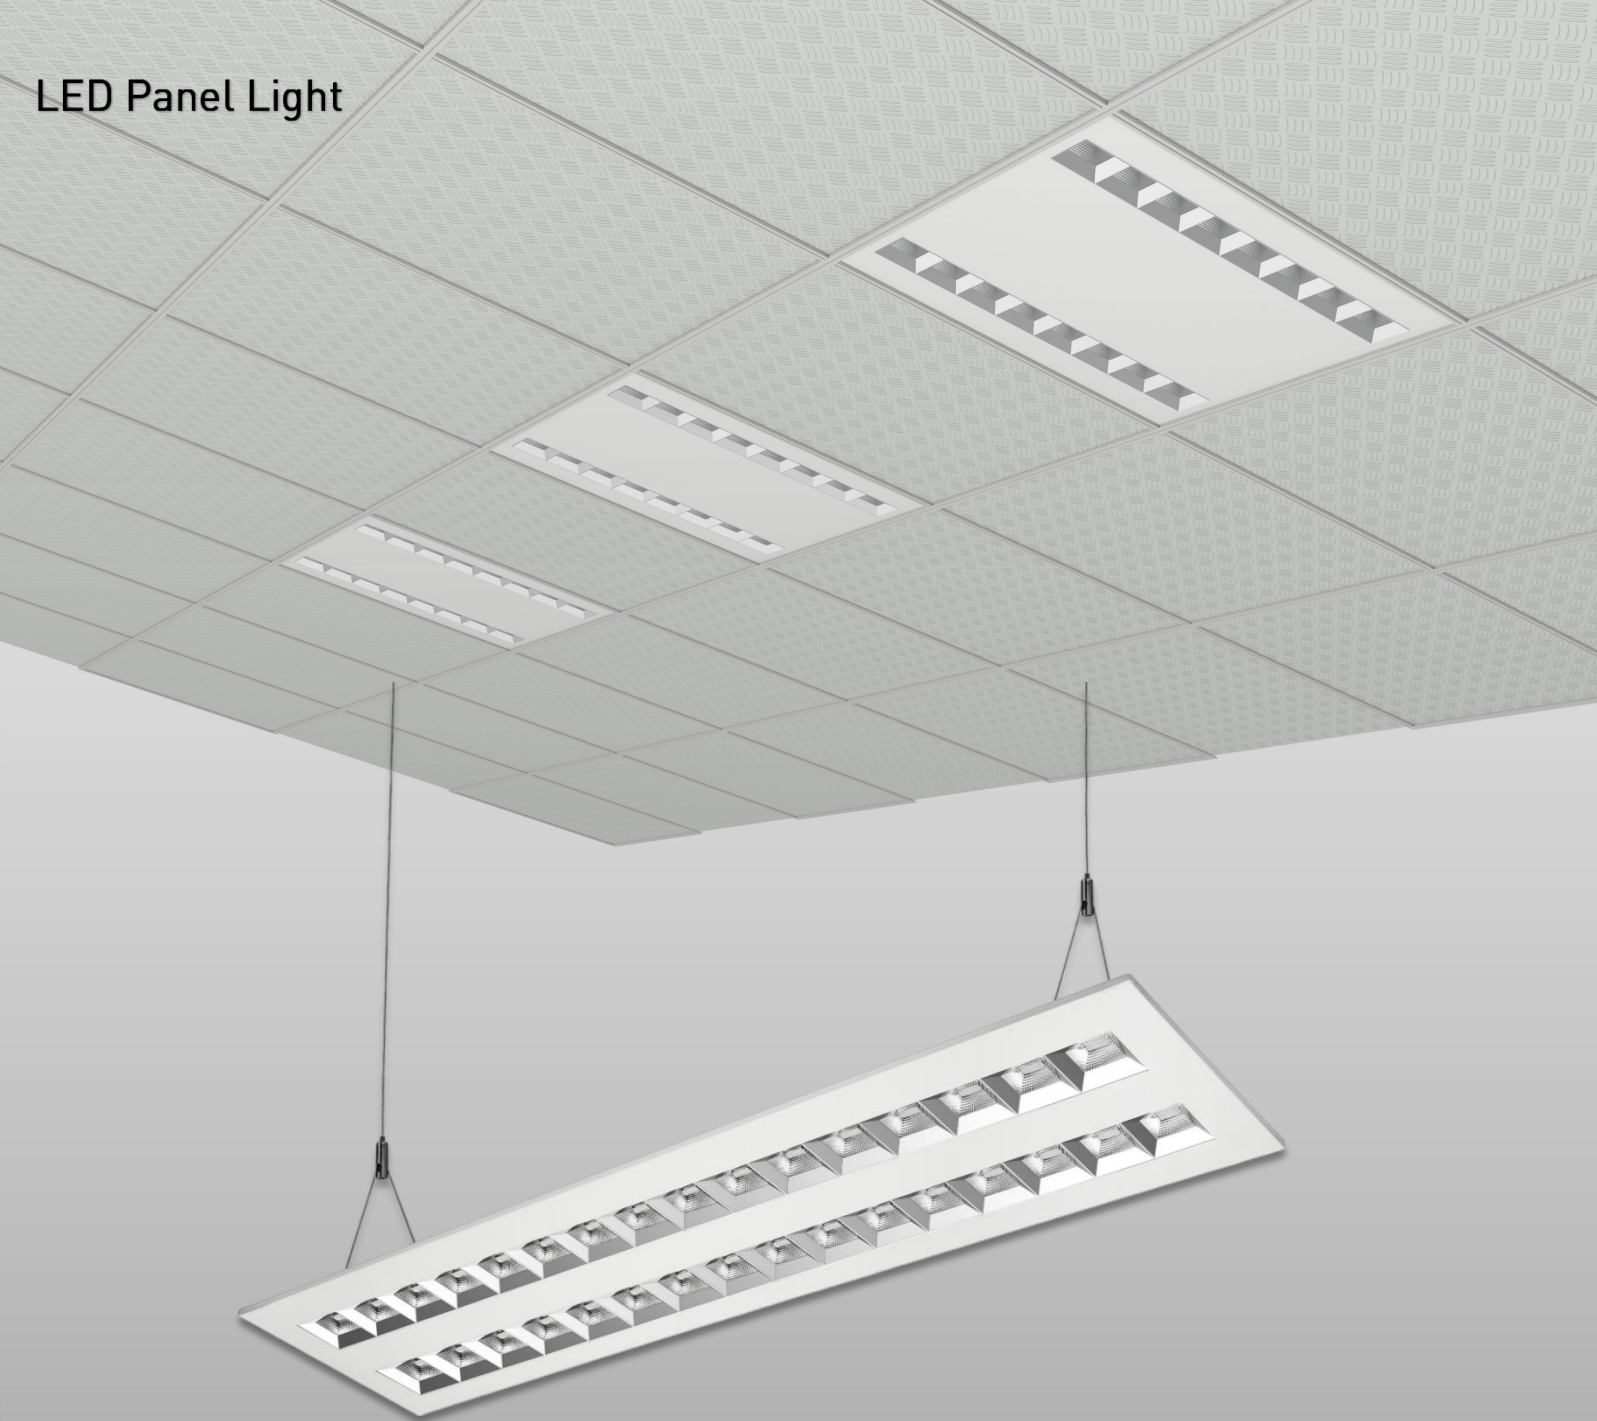


### Product Description


- LUMI is a panel light fixture with optical reflector cup.
- We have optimized the position of the LEDs so that the fixture can deliver an uniform light and extraordinary anti-glare lighting effect.
- The light source provides multiple color temperature options : 2700K, 3000K, 4000K, 5700K.
- It comes in black, white and gray options and has two suspension points that are adjustable in height.
- It is a perfect choice for lighting in spaces such as offices, meeting rooms, living rooms and dining rooms.




# LUMI Panel Light

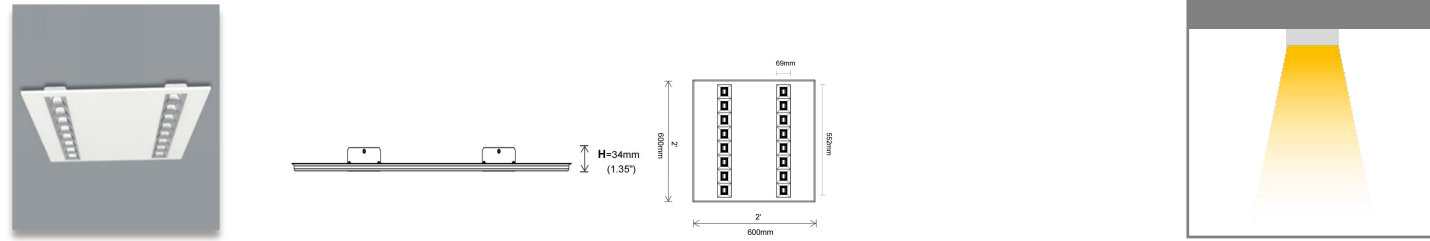

Product Code	Power	Installation	Voltage	Beam Angle	Optic	Lumen	UGR
LUMI-S6060-2RC	36W	Recessed	200-240V 100-277V	70°	Lens	3600-3780lm	UGR<19

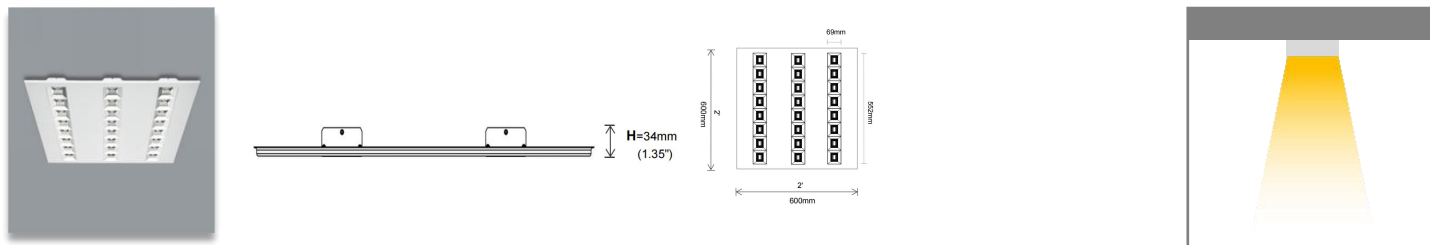


Product Code	Power	Installation	Voltage	Beam Angle	Optic	Lumen	UGR
LUMI-S6060-3RC	48W	Recessed	200-240V 100-277V	70°	Lens	4800-5040lm	UGR<19

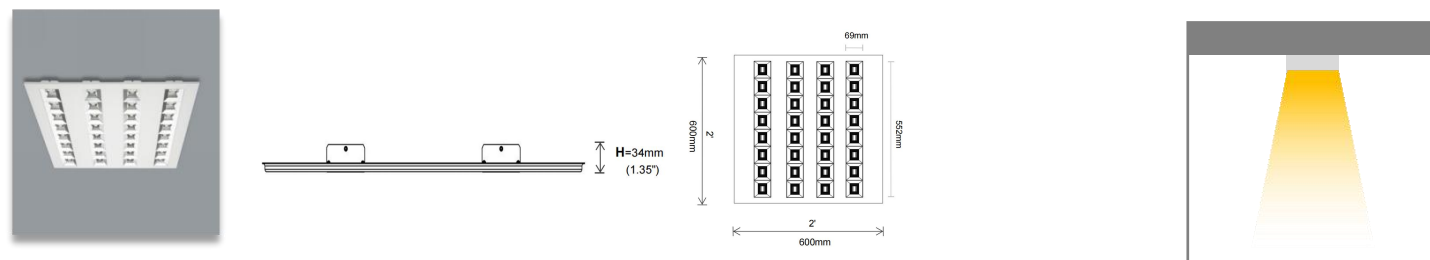


Product Code	Power	Installation	Voltage	Beam Angle	Optic	Lumen	UGR
LUMI-S6060-4RC	60W	Recessed	200-240V 100-277V	70°	Lens	6000-6300lm	UGR<19


# LUNA Panel Light

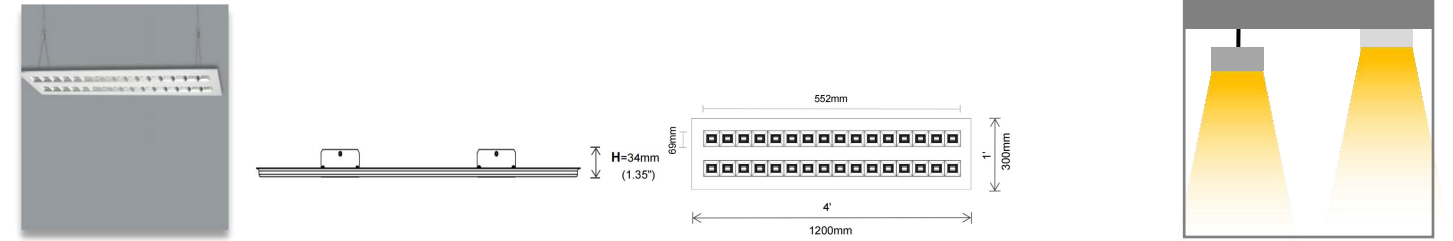

Product Code	Power	Installation	Voltage	Beam Angle	Optic	Lumen	UGR
LUMI-S12030-2RC	40W	Recessed Suspended	200-240V 100-277V	90°	White Reflector + Lens	4600lm	UGR<19

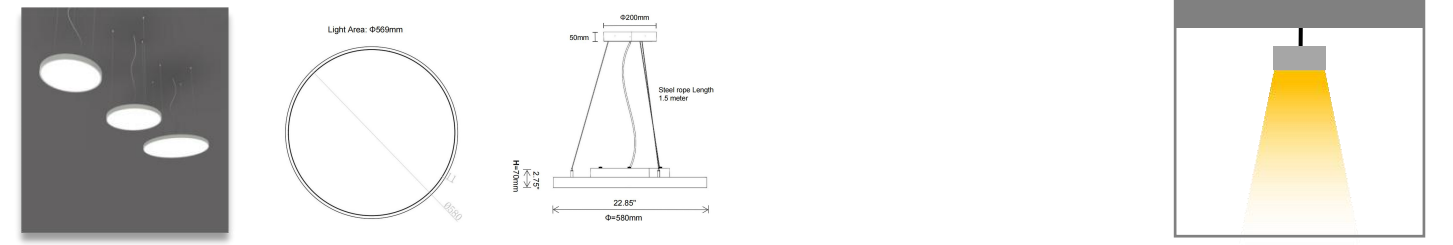

Product Code	Power	Installation	Voltage	Optic	Optic	Lumen	UGR
LUNA-R580-MLA	36W	Suspended Rope Mounted	200-240V 100-277V	90°	Microprismatic	3960-4140lm	UGR<21

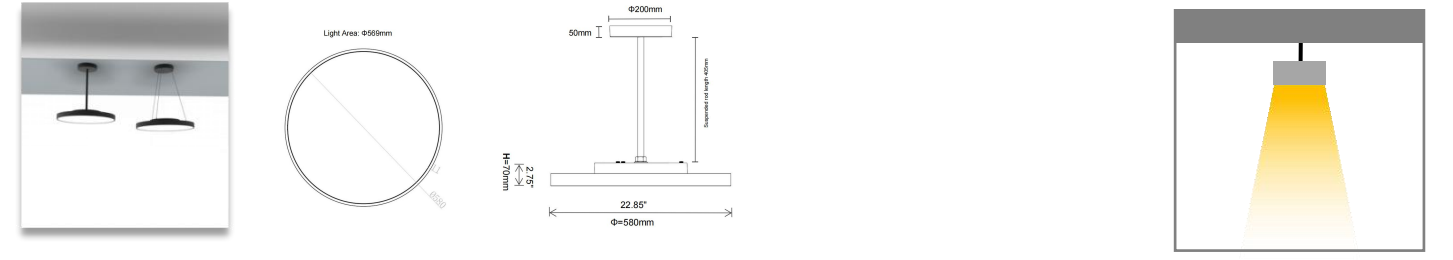

Product Code	Power	Installation	Voltage	Beam Angle	Optic	Lumen	UGR
LUNA-R580-MLB	36W	Suspended Rod Mounted	200-240V 100-277V	90°	Microprismatic	3940-4140lm	UGR<21